

SONY®

DIGITAL VIDEOCASSETTE RECORDER

DNW-75/75P



MAINTENANCE MANUAL

Volume 2 1st Edition

Serial No. 10001 and Higher: DNW-75 (SY)

Serial No. 30001 and Higher: DNW-75 (J)

Serial No. 40001 and Higher: DNW-75P

警告

このマニュアルは、サービス専用です。

お客様が、このマニュアルに記載された設置や保守、点検、修理などを行うと感電や火災、人身事故につながる可能性があります。

危険をさけるため、サービストレーニングを受けた技術者のみご使用ください。

設置や保守、点検、修理などを行う前に、別冊のメンテナンスマニュアルVolume 1、インストレーションマニュアル、オペレーションマニュアルのそれぞれの「安全のために」を必ずお読みください。

WARNING

This manual is intended for qualified service personnel only.

To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

WARNING

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.

Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegebenen Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

AVERTISSEMENT

Ce manuel est destiné uniquement aux personnes compétentes en charge de l'entretien. Afin de réduire les risques de décharge électrique, d'incendie ou de blessure n'effectuer que les réparations indiquées dans le mode d'emploi à moins d'être qualifié pour en effectuer d'autres. Pour toute réparation faire appel à une personne compétente uniquement.

Table of Contents

Manual Structure

Purpose of this manual	3 (E)
Related manuals	3 (E)
Contents	4 (E)

1. Service Overview

1-1. Notes on Repair Parts	1-1 (E)
----------------------------------	---------

2. Exploded Views

2-1. Index	2-1
2-2. Spare Parts	2-2

3. Electrical Parts List

3-1. Frame List	3-1
3-2. Cable/Harness List	3-1
3-3. External Connectors	3-4
3-4. Each Board	3-6
3-5. Power Supply Unit	3-120

4. Packing Materials and Supplied Accessories List

5. Power Cords List

6. Optional Fixtures List

Manual Structure

Purpose of this manual

This manual is the Maintenance manual volume 2 of digital videocassette recorder DNW-75/75P.

This maintenance manual (Volume 1, 2, and 3) is intended for use by trained system and service engineers, and provides the information of maintenance and detailed service (parts replacement, guideline for adjustment, schematic diagrams, board layouts, detailed parts list).

This manual (volume 2) describes detailed parts list.

Related manuals

Besides this “Maintenance manual”, the following manuals are available for digital videocassette recorder DNW-75/75P.

- **Operation Manual (Supplied with the DNW-75/75P.)**

This manual is necessary for application and operation (and installation) of the DNW-75/75P.

- **Installation Manual (Supplied with the DNW-75/75P.)**

This manual describes the information on installing the DNW-75/75P.

- **Protocol Manual of Remote (9-pin) Connector (available on request)**

This manual explains the protocol for controlling the VTR via the RS-422A (9-pin serial remote) . If this manual is required, please contact your local Sony Sales Office/Service Center.

- **Interface Manual of Parallel I/O (50-pin) Connector (available on request)**

This manual explains the protocol for controlling the VTR via the parallel (50-pin). If this manual is required, please contact your local Sony Sales Office/Service Center.

- **“Semiconductor Pin Assignments” CD-ROM (Available on request)**

This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in Broadcasting & Professional Systems Company equipment.

Semiconductors that cannot be searched for on this CD-ROM are listed in the maintenance manual for the corresponding unit. The maintenance manual contains a complete list of all semiconductors and their ID Nos., and thus should be used together with the CD-ROM.

Part number: 9-968-546-XX

Contents

Maintenance manual volume 2 (9-967-870-)

This maintenance manual (volume 1, volume 2, and volume 3) is organized by following sections.

Section 1 Service Overview

Describes the notes on repair parts.

Section 2 Exploded Views

Describes the exploded views and the mechanical parts list (including some electrical parts).

Section 3 Electrical Parts List

Describes the electrical parts list of each board (including some mechanical parts). Moreover, describes the electrical parts list (frame electrical parts list) except on the board.

Section 4 Packing Materials and Supplied Accessories List

Describes the packing materials and the supplied accessories list.

Section 5 Power Cords List

Describes the recommended power cords list.

Section 6 Optional Fixtures List

Describes the optional fixtures and maintenance articles list.

**Maintenance manual
volume 1
(9-967-869-)**

Section 1 Service Overview

Explains fundamental area of the information that is required to service, (removal of cabinet and cassette compartment, the functions of printed circuit board, the locations of main part, fixture and measuring equipment information, notes, etc.), the measures against trouble, error messages, and ISR (Interactive Status Reporting).

Section 2 Periodic Maintenance and Inspection

Explains the recommended periodic maintenance, the cleaning procedure and the video head tip protrusion check procedure.

Section 3 Maintenance Mode

Explains each menu of the maintenance mode.

Section 4 Electrical Alignment

Explains the electrical alignment for the maintenance of this unit.

Section 5 Replacement of Main Parts

Explains the replacement of mechanical parts, power supply unit, and circuit boards.

Section 6 Tape Path Alignment

Explains the tape path alignment after replacement of parts that are described in Section 5.

Section 7 Electrical Alignment after Main Parts Replacement

Explains the electrical alignment associated with replacement of parts that are described in Section 5.

**Maintenance manual
volume 3
(9-967-871-)**

Section 1 Semiconductor Pin Assignments

This section contains information on semiconductors used for unit.

It includes a complete list of the semiconductors and their ID Nos. for retrieving information on "Semiconductor Pin Assignments" CD-ROM, which is available separately.

Please refer to this section together with the "Semiconductor Pin Assignments" CD-ROM.

Information on the semiconductors not contained in the CD-ROM at the time of issue of this manual, if any, is given in this section as well.

Section 2 Block Diagrams

Describes the circuit description and the block diagrams of overall and each board.

Section 3 Schematic Diagrams and Frame Wiring

Describes the frame wiring and the schematic diagrams for the unit.

Section 4 Board Layouts

Describes the board layouts for the unit.

Section 1

Service Overview

1-1. Notes on Repair Parts

1. Safety Related Components Warning

Components marked \triangle are critical to safe operation.
Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.
Parts list has the present standardized repair parts.

3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Units Representation

The following represented units are changed or omitted in writing.

Units		Representation
Capacitance	μF	uF
Inductance	μH	uH
Resistance	Ω	Abbreviation
Temperature	$^{\circ}\text{C}$	XXX-DEG-C

5. Destination Representation

The part indicated “For J/E” in the spare parts list is used in the unit written below.

For J : The part is used in a unit for Japan.

For E : The part is used in a unit for regions except Japan.



Section 2

Exploded Views


2-1. Index

Note

As for the representation of destination “(E)” in the spare-parts list, refer to Section “1-1. Notes on Repair Parts”.

Item	No.	Title	Page
S side reel chassis	1 -	S Reel Chassis	2-2
Reel shift assembly MC sensor	101 -	Reel Shift Block	2-4
T side reel chassis	201 -	T Reel Chassis	2-6
Upper drum Drum Video head cleaner assembly	301 -	Drum	2-8
Tension regulator CTL/FE head assembly MR sensor	401 -	Tension Regulator and CTL/FE Head	2-10
Manual eject assembly MR sensor TG-2	501 -	Manual Eject	2-12
Threading ring assembly Pinch arm, Ring rollers CL guide rail	601 -	Threading Ring	2-14
S plate assembly AT head assembly Capstan motor, TG-3	701 -	S Plate and AT Head	2-16
Gear box assembly Pinch press assembly	801 -	Threading Motor and Pinch Press Block	2-18
T drawer arm assembly T tension regulator, TG-4	901 -	T-arm and T Tension Regulator	2-20
Cassette compartment	1001 -	Cassette Compartment	2-22
Mounted circuit boards	1101 -	Mounted Circuit Boards (Bottom Side)	2-24
Outer panels	1201 -	Outer Panels	2-26
Front panel Knobs, Power switch	1301 -	Front Panel	2-28
SC guide SWC-35 board	1401 -	SC Guide and SWC-Board	2-30
Lower control panel Search dial	1501 -	Lower Control Panel	2-32
Sub control panel Slide rails	1601 -	Sub Control Panel	2-34
Power supply unit Power panel	1701 -	Power Supply Unit	2-36
Connector panel	1801 -	Connector Panel	2-38
MD plate Cassette compartment bracket Fan motor (rear)	1901 -	MD Plate and Cassette Compartment Bracket	2-40
Fan motor (MD) Motherboard	2001 -	Fan Motor and Motherboard	2-42
Plug-in boards (L)	2101 -	Plug-in Boards (L)	2-44
Plug-in boards (S)	2201 -	Plug-in Boards (S)	2-46

2-2. Spare Parts

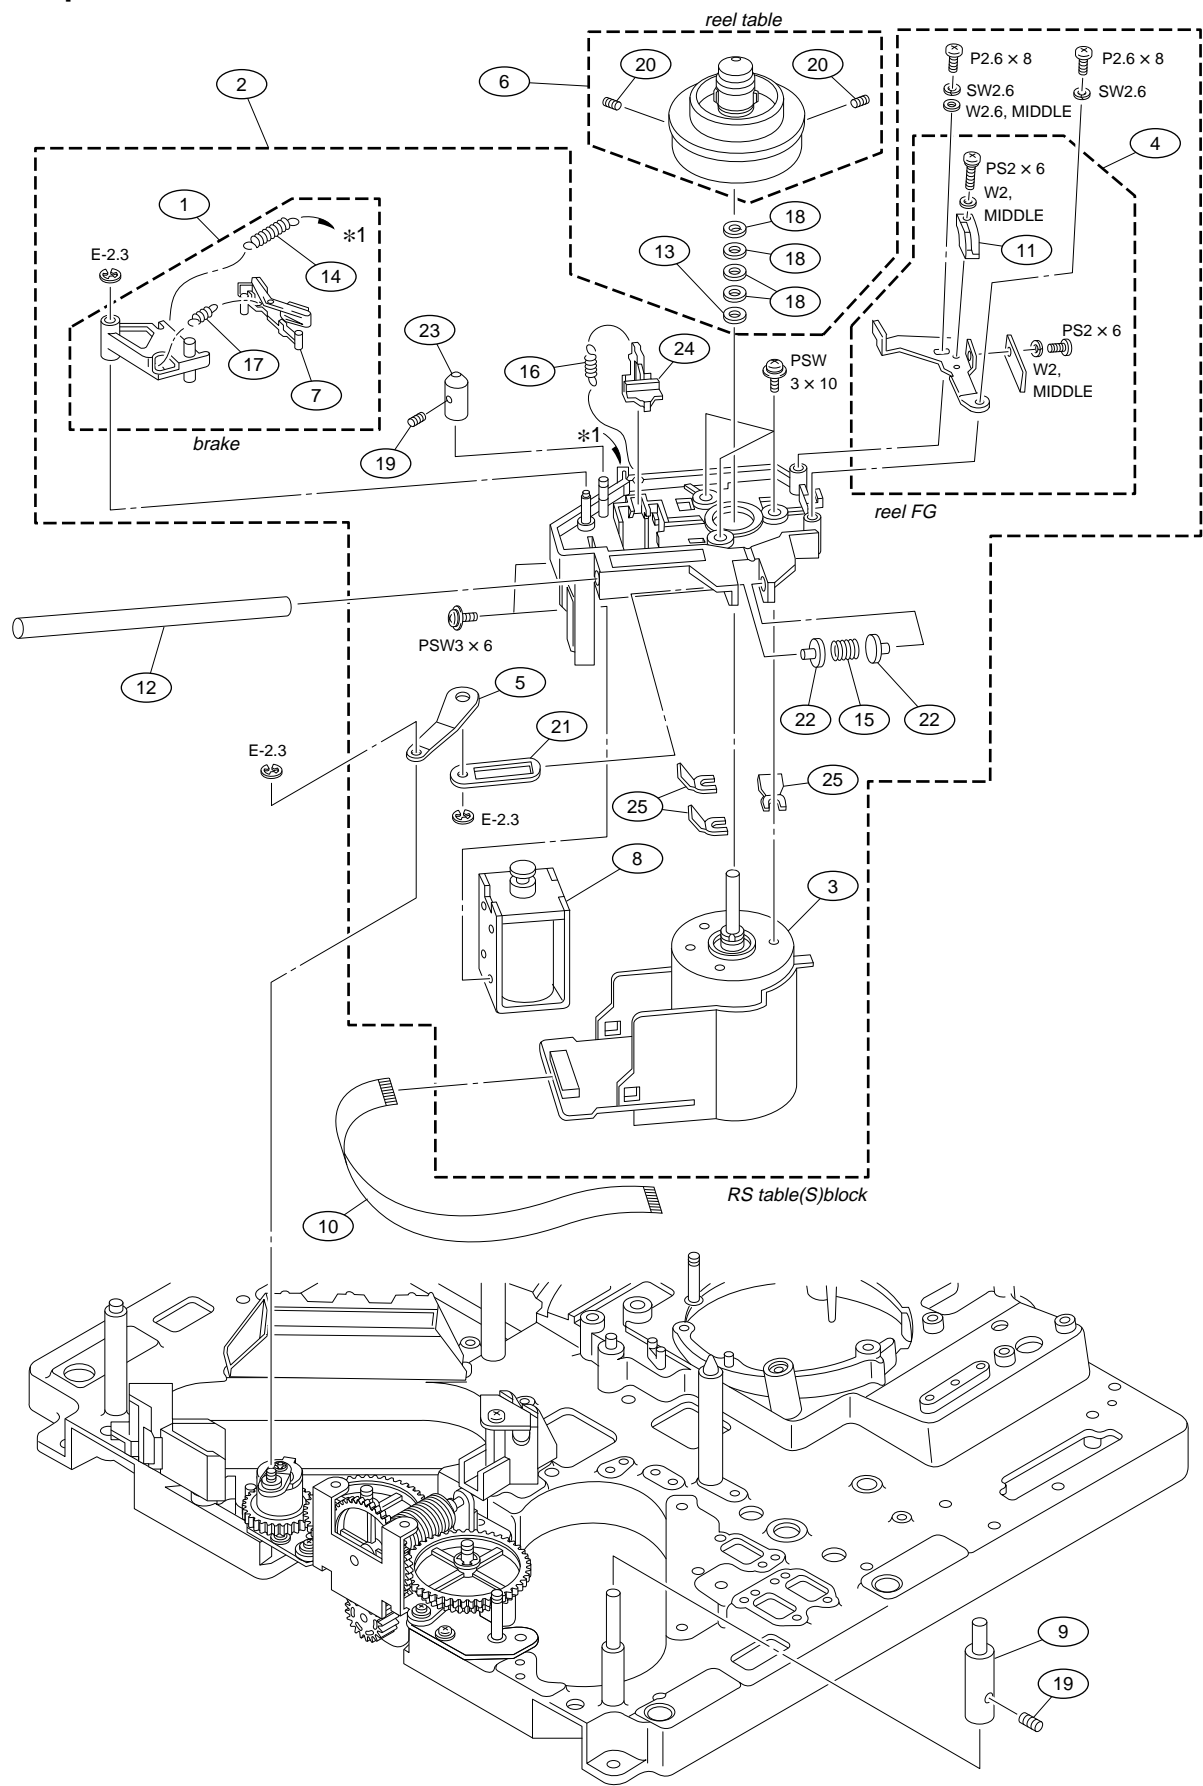


No.	Part No.	SP Description
1	A-6741-066-A	o BRAKE ASSY
2	A-8267-703-J	s BLOCK ASSY, RS TABLE (S)
3	A-8267-774-E	s RM ASSY
4	A-8278-310-A	s FG ASSY, REEL
5	X-3166-060-1	o ARM (B) ASSY, CRANK
6	X-3678-560-2	s TABLE ASSY, REEL
7	X-3717-205-1	s LINING ASSY
8	1-454-417-41	s SOLENOID, PLUNGER
9	3-717-222-01	s CAP (L), CS SHAFT
10	1-661-362-11	o FLEXIBLE CIRCUIT BOARD, FL-239
11	1-801-300-11	s RESISTOR, ELEMENT, MAGNETIC
12	3-171-431-01	s SHAFT, SLIDE
13	3-188-108-01	s SPACER, DIA. 4
14	3-307-381-00	s SPRING, TENSION
15	3-491-247-00	s SPRING, COMPRESSION
16	3-535-532-01	s SPRING, TENSION
17	3-648-217-00	o SPRING, TENSION
18	3-701-441-01	s WASHER, POLY 4mm DIA., 0.13T
	3-701-441-11	s WASHER, POLY 4mm DIA., 0.25T
	3-701-441-21	s WASHER, POLY 4mm DIA., 0.50T
19	3-701-506-01	s SET SCREW, DOUBLE POINT 3X4
20	3-701-507-00	s SET SCREW, DOUBLE POINT, (M3X5)
21	3-717-230-01	o BRACKET, LIMITER
22	3-717-231-01	o HOLDER, LIMITER
23	3-717-266-01	o CAP (S), CG SHAFT
24	3-717-450-02	o ARM, BRAKE RELEASE
25	3-717-625-01	s SPACER

Screws/Washers

Part No.	SP Description
7-623-207-22	s SW 2.6, TYPE 2
7-624-105-04	s STOP RING 2.3, TYPE -E
7-628-253-20	s SCREW +PS 2X6
7-682-947-01	s SCREW +PSW 3X6
7-682-949-01	s SCREW +PSW 3X10
7-685-134-19	s SCREW +P 2.6X8 TYPE2 SLIT
7-688-001-01	s W 2, MIDDLE
7-688-002-11	s W 2.6, MIDDLE

Reel Shift Block

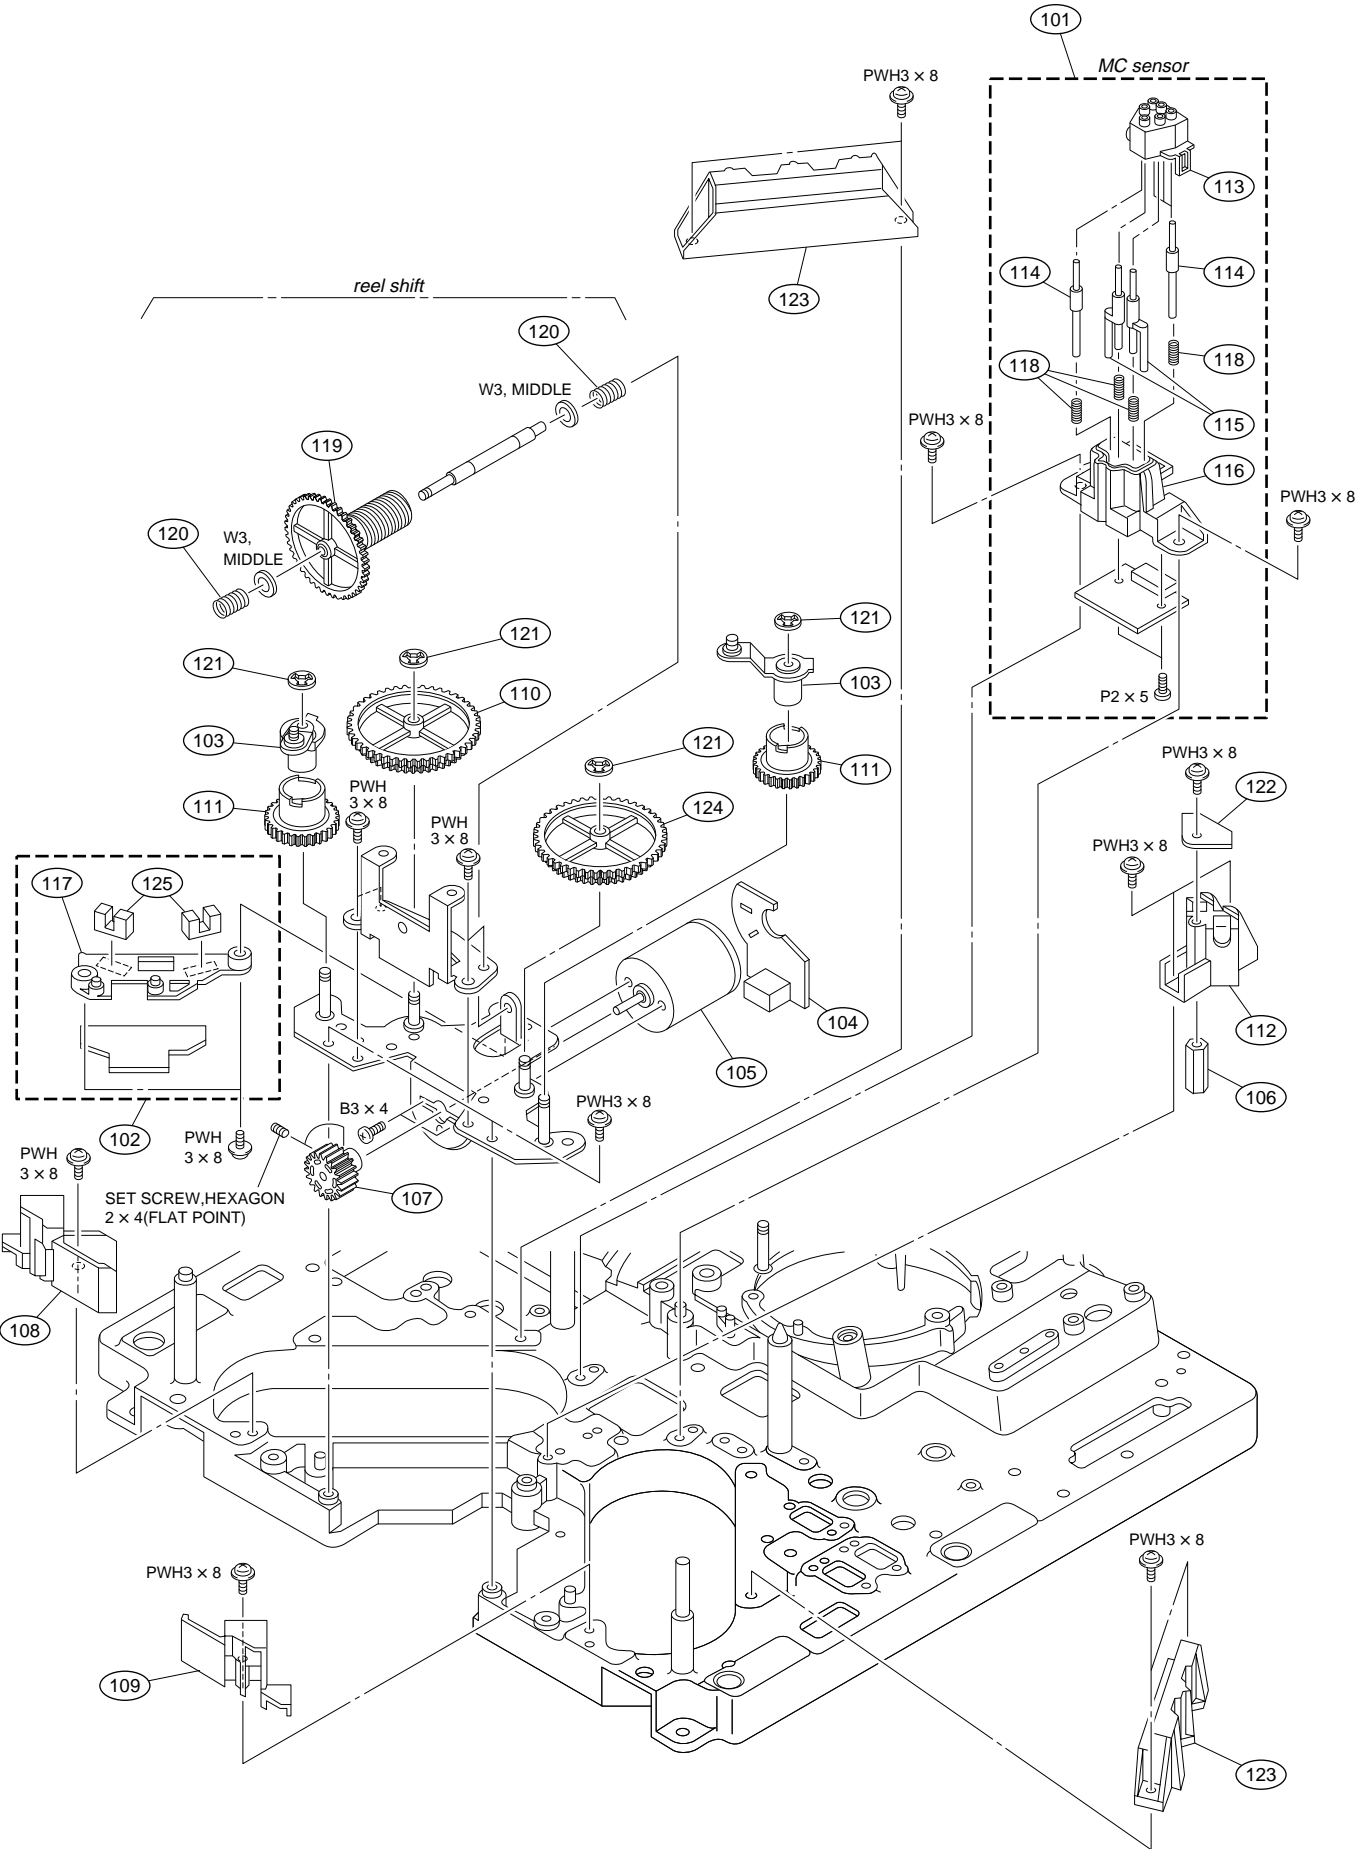


No.	Part No.	SP Description
101	A-8267-549-B	o SENSOR ASSY, MC
102	A-8276-619-A	o MOUNTED CIRCUIT BOARD, PTC-71
103	X-3166-024-1	o ARM (A) ASSY, CRANK
104	1-648-570-11	o PRINTED CIRCUIT BOARD, CCM-15
105	1-698-152-11	s MOTOR, DC (SVD-1449)
106	2-280-622-51	o SUPPORT (M3), HEXAGON
107	3-171-316-01	s GEAR, M
108	3-171-397-02	o HOLDER (S), SHAFT
109	3-171-428-02	o HOLDER (T), SHAFT
110	3-171-429-01	o GEAR, LS
111	3-171-430-01	o GEAR, CRANK
112	3-180-687-01	o HOLDER (A), SHAFT
113	3-180-756-01	o CAP, MC
114	3-180-757-01	o PIN (1), MC
115	3-180-758-01	o PIN (2), MC
116	3-180-759-01	o HOLTER, MC
117	3-180-866-01	o BASE, LS SENSOR
118	3-554-202-00	o SPRING, COMPRESSION
119	3-603-393-01	o GEAR, SHIFT
120	3-659-324-00	s SPRING, COMPRESSION
121	3-669-596-00	s WASHER (2.3), STOPPER
122	3-717-224-01	s RETAINER, SHAFT, SLIDE
123	3-717-398-01	o TABLE, SLIDE
124	3-717-399-01	s WHEEL, W
125	8-719-939-05	s PHOTOINTERRUPTER GP1S54

Screws/Washer

Part No.	SP Description
7-621-733-08	s SET-SCT, HEX. 2X4 FLAT POINT
7-682-545-09	s SCREW +B 3X4
7-682-903-21	s SCREW +PWH 3X8
7-685-103-19	s SCREW +P 2X5 TYPE2 SLIT
7-688-003-11	s W 3, MIDDLE


T Reel Chassis

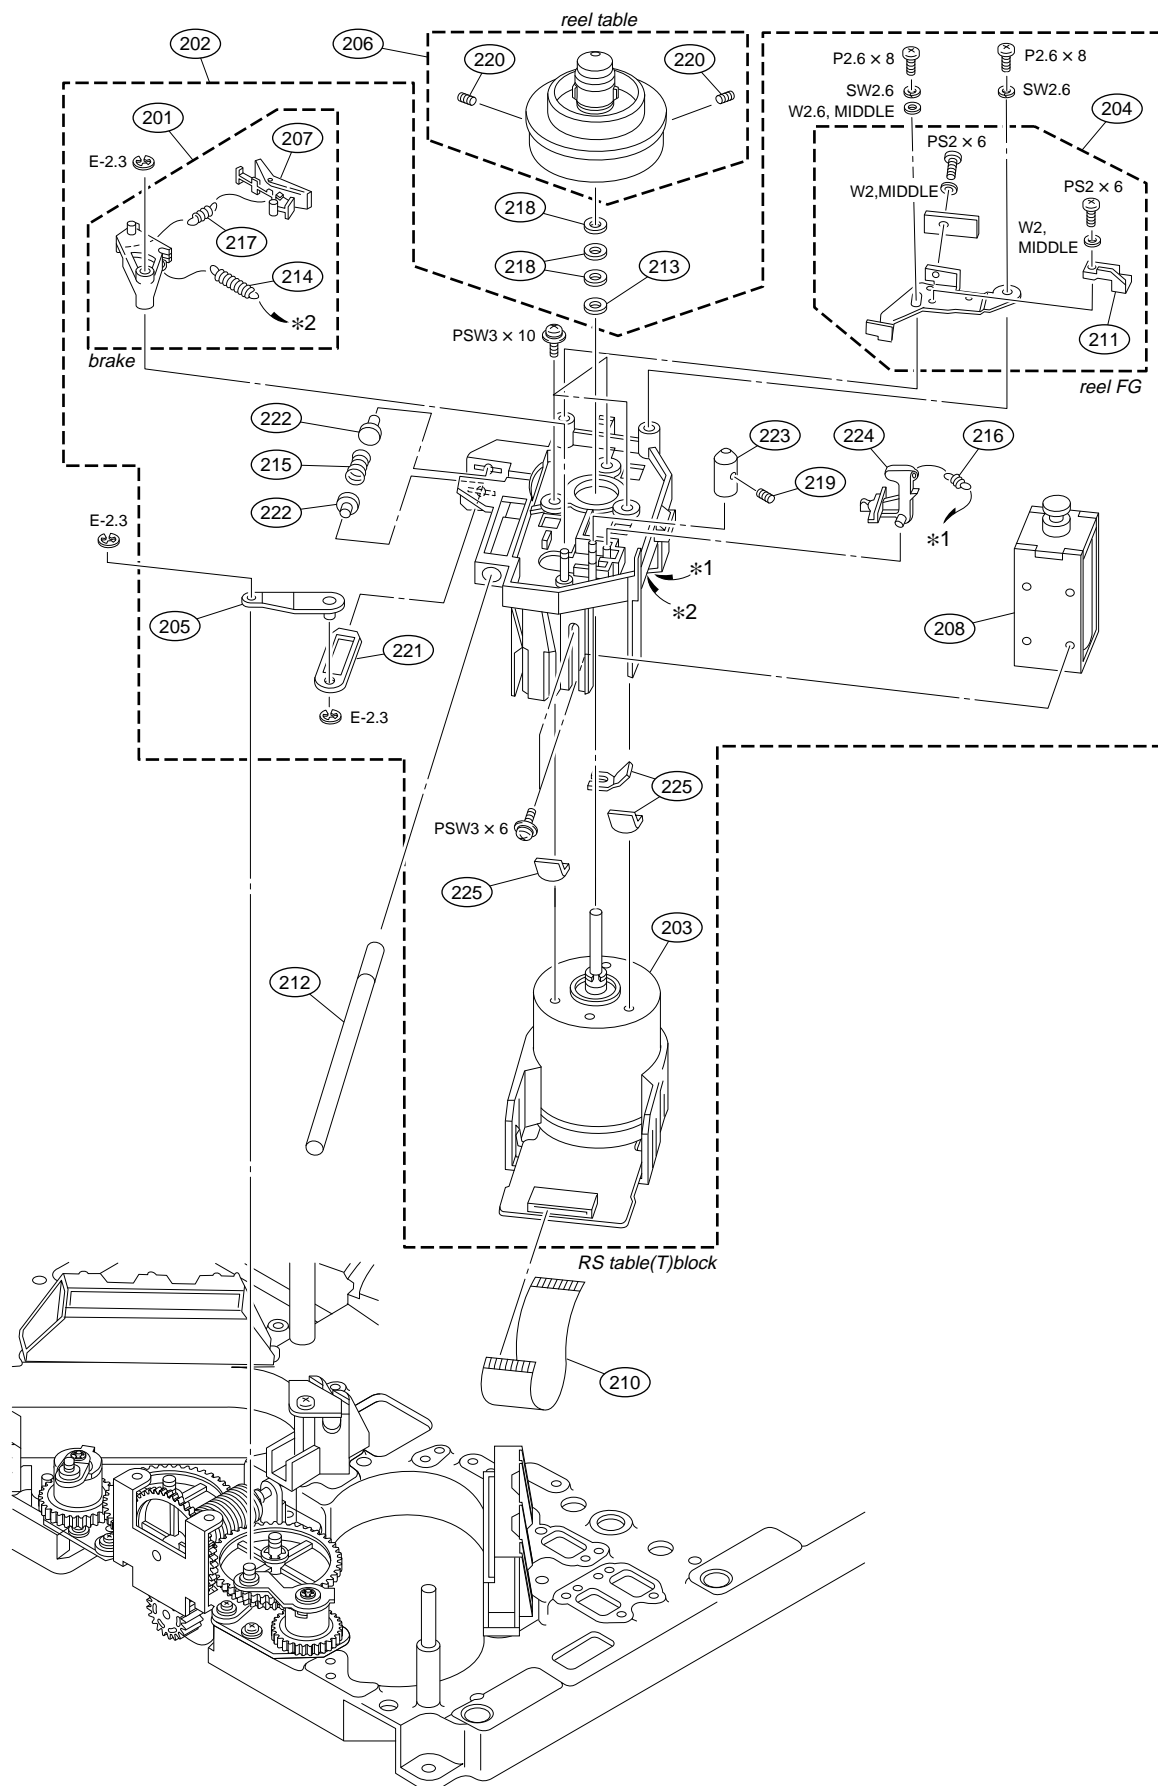

No.	Part No.	SP Description
201	A-6741-066-A	o BRAKE ASSY
202	A-8267-702-H	s BLOCK ASSY, RS TABLE (T)
203	A-8267-774-E	s RM ASSY
204	A-8278-310-A	s FG ASSY, REEL
205	X-3166-060-1	o ARM (B) ASSY, CRANK
206	X-3678-560-2	s TABLE ASSY, REEL
207	X-3717-205-1	s LINING ASSY
208	1-454-417-41	s SOLENOID, PLUNGER
210	1-661-362-11	o FLEXIBLE CIRCUIT BOARD, FL-239
211	1-801-300-11	s RESISTOR, ELEMENT, MAGNETIC
212	3-171-431-01	s SHAFT, SLIDE
213	3-188-108-01	s SPACER, DIA. 4
214	3-307-381-00	s SPRING, TENSION
215	3-491-247-00	s SPRING, COMPRESSION
216	3-535-532-01	s SPRING, TENSION
217	3-648-217-00	o SPRING, TENSION
218	3-701-441-01	s WASHER, POLY 4mm DIA., 0.13T
	3-701-441-11	s WASHER, POLY 4mm DIA., 0.25T
	3-701-441-21	s WASHER, POLY 4mm DIA., 0.50T
219	3-701-506-01	s SET SCREW, DOUBLE POINT 3X4
220	3-701-507-00	s SET SCREW, DOUBLE POINT, (M3X5)
221	3-717-230-01	o BRACKET, LIMITER
222	3-717-231-01	o HOLDER, LIMITER
223	3-717-266-01	o CAP (S), CG SHAFT
224	3-717-450-02	o ARM, BRAKE RELEASE
225	3-717-625-01	s SPACER

Screws/Washers

Part No.	SP Description
7-623-207-22	s SW 2.6, TYPE 2
7-624-105-04	s STOP RING 2.3, TYPE -E
7-628-253-20	s SCREW +PS 2X6
7-682-947-01	s SCREW +PSW 3X6
7-682-949-01	s SCREW +PSW 3X10
7-685-134-19	s SCREW +P 2.6X8 TYPE2 SLIT
7-688-001-01	s W 2, MIDDLE
7-688-002-11	s W 2.6, MIDDLE

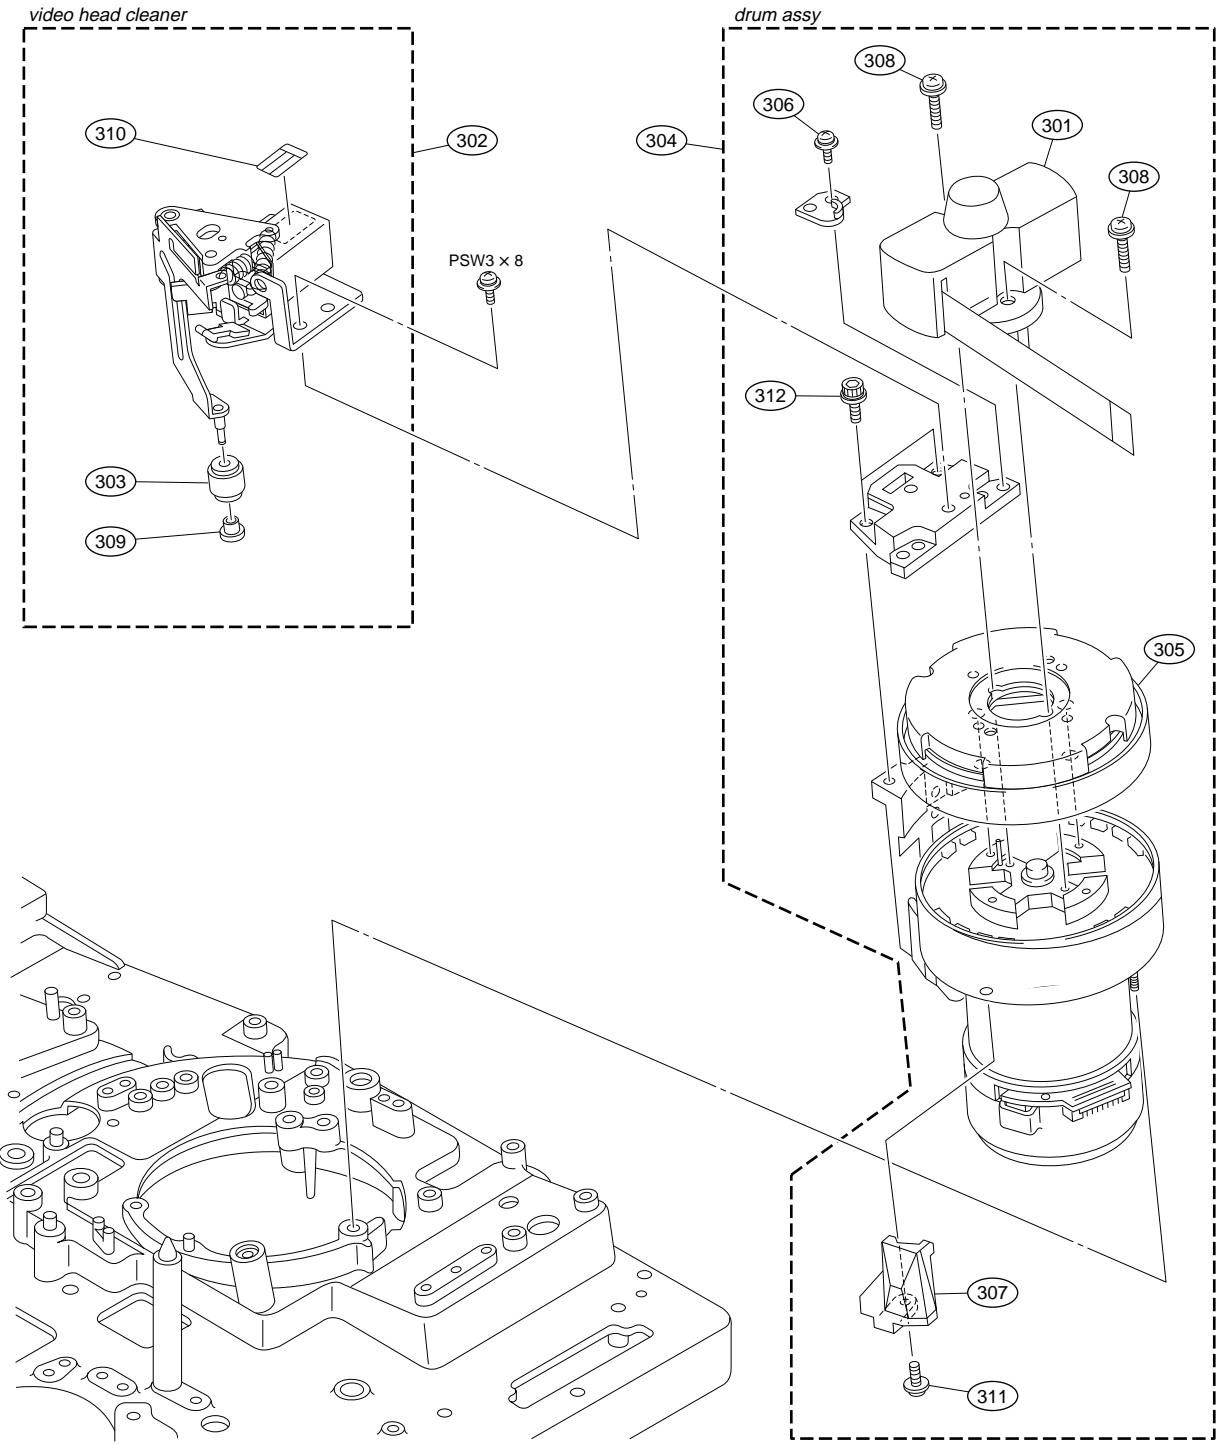


No.	Part No.	SP Description
301	A-8277-462-A	s RING (3) ASSY (RP), BRUSH SLIP
302	A-8320-545-A	s CLEANER (B) ASSY (RP), VIDEO HEAD
303	A-8320-546-A	s ROLLER (B) ASSY (RP), V CLEANING
304	A-8323-266-A	s DRUM ASSY, DJH-24A-R
305	A-8323-268-A	s UPPER DRUM, DJR-24A-R
306	2-640-315-01	o SCREW (M2X5), SMALL, +P SW
307	3-180-112-02	o BRACKET, TAPE
308	3-180-163-01	s SCREW (2X16)
309	3-182-765-02	s SPACER, CR
310	3-615-958-01	s LABEL5, SELF
311	3-669-607-11	s SCREW +PSW (SMALL ROUND) (2.6)
312	3-899-249-11	s BOLT, HEXAGON SOCKET

Screw

Part No.	SP Description
7-682-948-01	s SCREW +PSW 3X8


Tension Regulator and CTL/FE Head

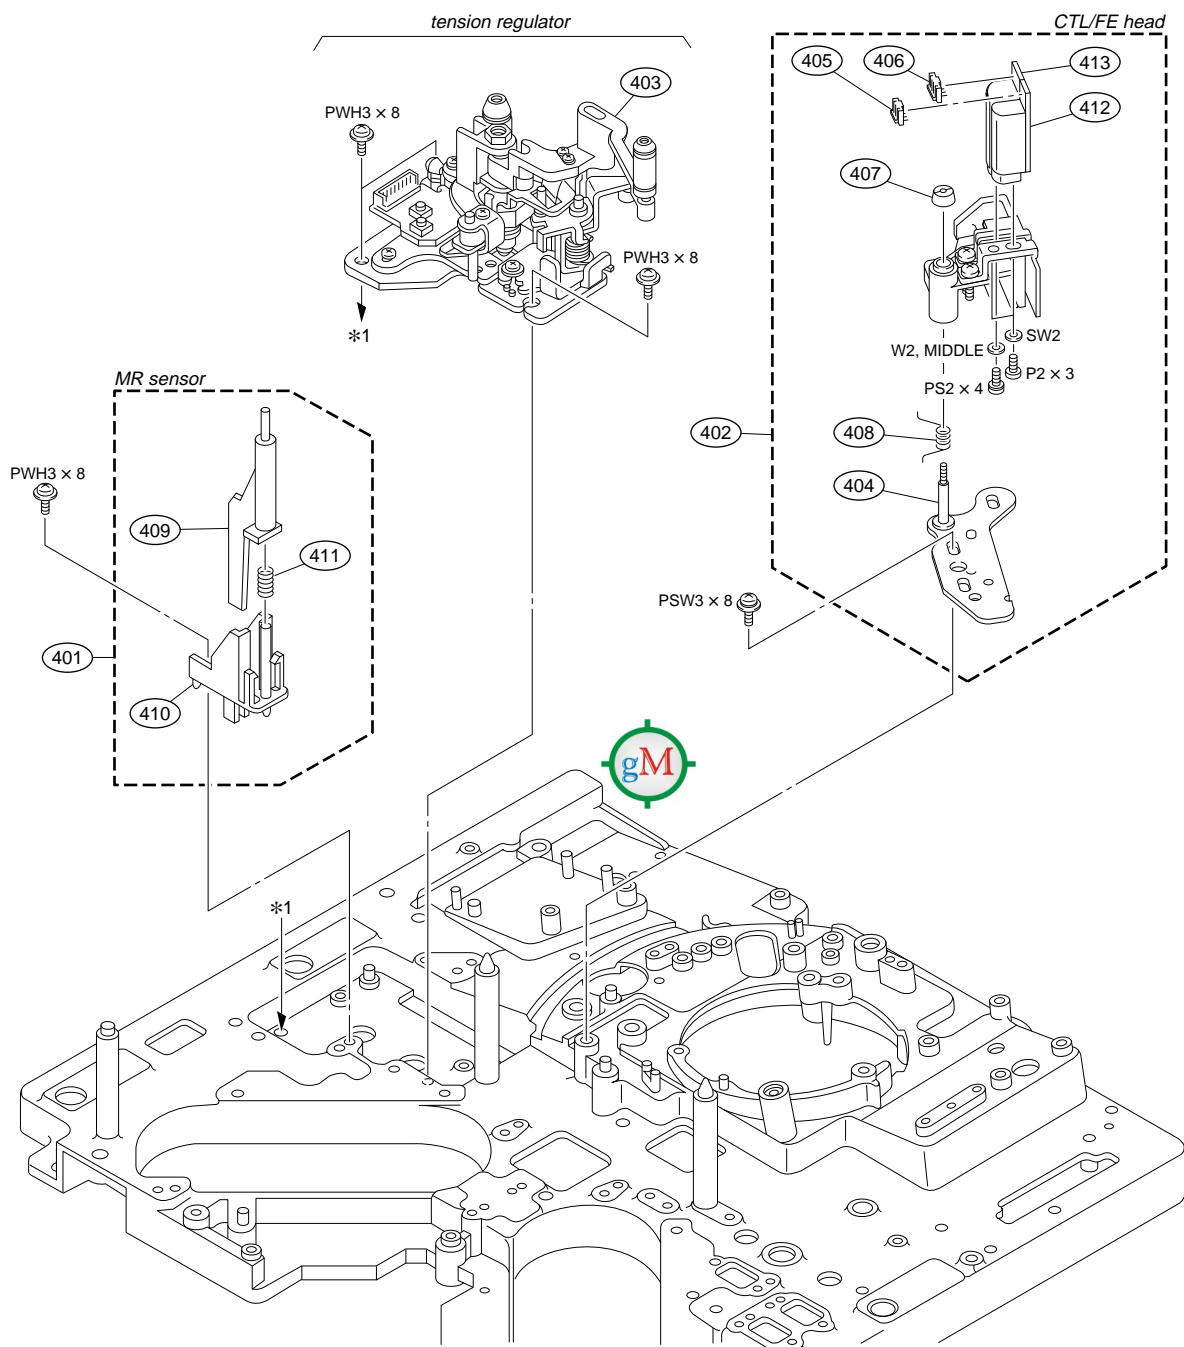

No.	Part No.	SP Description
401	A-8267-392-A	o SENSOR ASSY, MR
402	A-8267-411-B	o HEAD ASSY, CTL/FE
403	A-8267-795-E	s TENSION REGULATOR ASSY
404	X-3167-044-2	o BASE ASSY, CTL/FE
405	1-506-481-11	s PIN, CONNECTOR 2P
406	1-564-013-11	o PIN, CONNECTOR 3P
407	2-203-519-21	s NUT (A), LOCK, PIVOT
408	3-180-725-01	s SPRING, CTL/FE
409	3-180-745-01	o LEVER, MR
410	3-180-746-01	o HOLDER, MR
411	4-880-426-00	o SPRING, COMPRESSION
412	8-825-554-84	s CTL HEAD, PS244-21B
413	8-825-770-74	s HEAD, FE EF291-21

Screws/Washers

Part No.	SP Description
7-621-255-15	s SCREW +P 2X3
7-623-205-22	s SW 2, TYPE 2
7-628-253-15	s SCREW +PS 2X5
7-682-903-21	s SCREW +PWH 3X8
7-682-948-01	s SCREW +PSW 3X8
7-688-001-11	s W2, MIDDLE

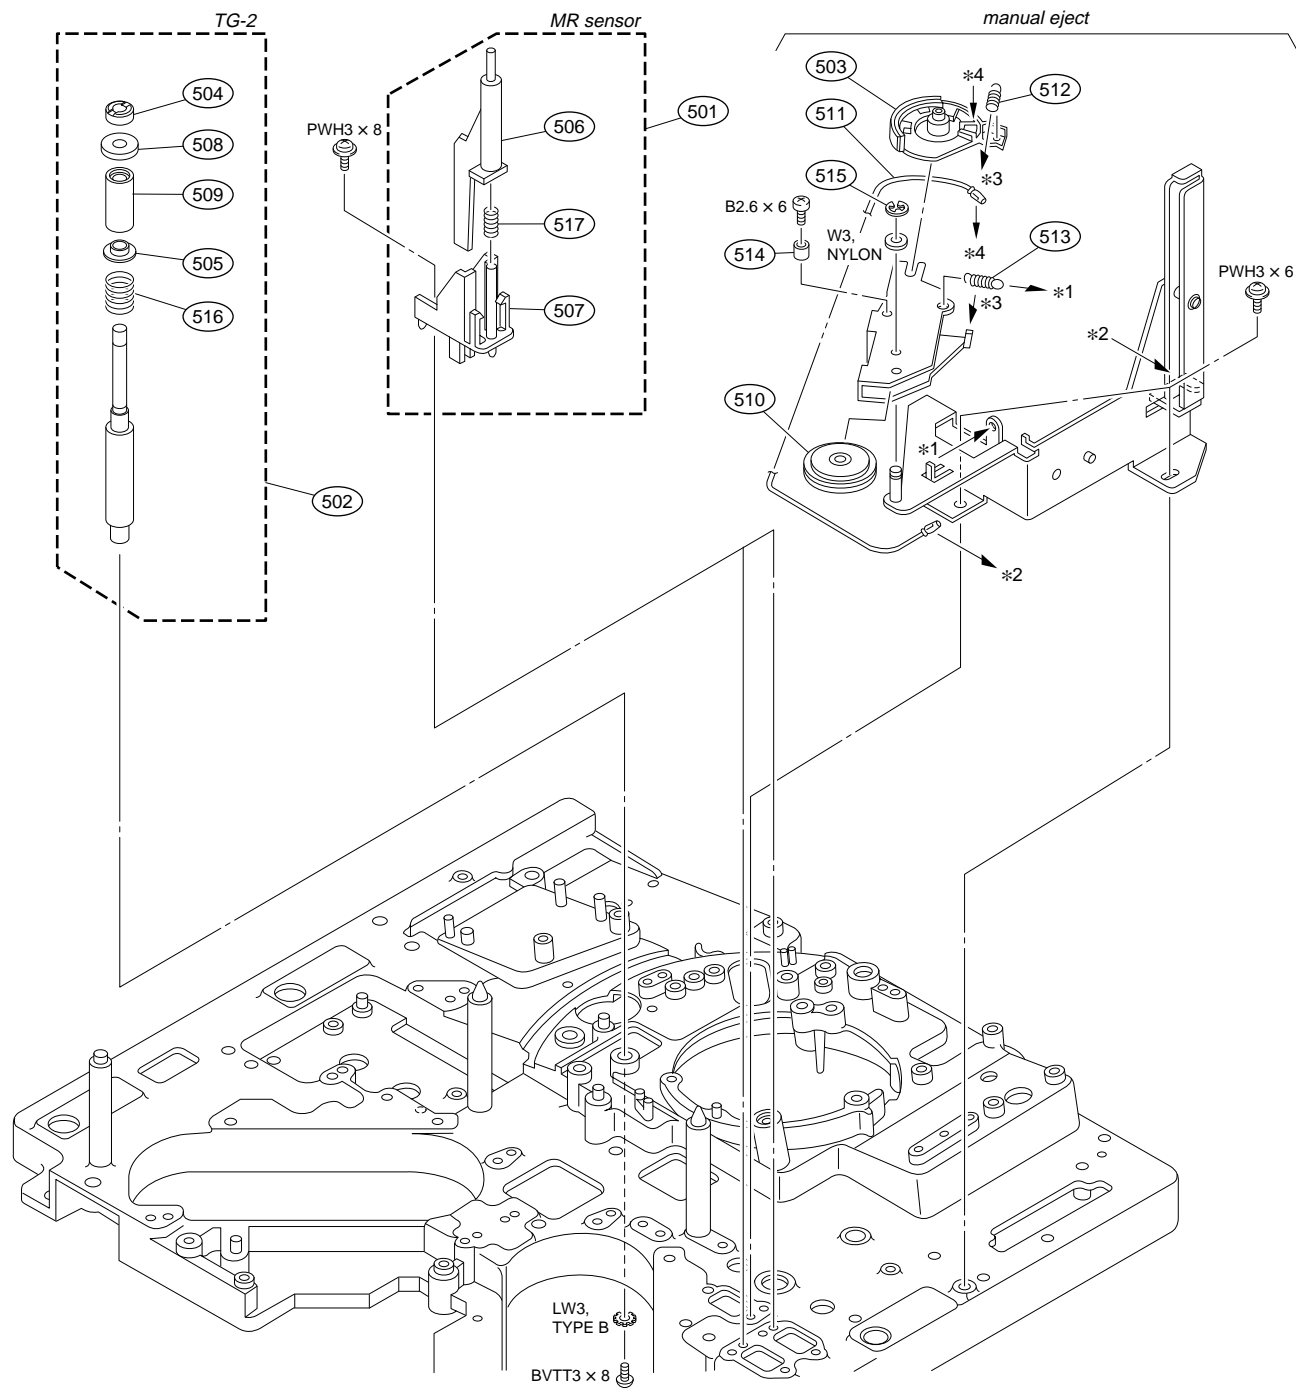


No.	Part No.	SP Description
501	A-8267-392-A	o SENSOR ASSY, MR
502	A-8278-861-A	s TG-2 ASSY
503	X-3167-257-1	o IDLER ASSY, ME
504	2-203-519-21	s NUT (A), LOCK, PIVOT
505	3-180-669-02	s FLANGE, FIXED GUIDE USE
506	3-180-745-01	o LEVER, MR
507	3-180-746-01	o HOLDER, MR
508	3-181-489-01	s FLANGE, DIA. 8
509	3-181-491-01	o SLEEVE, DIA. 6
510	3-181-834-01	o PULLEY, ME
511	3-181-839-01	o WIRE, STAINLESS
512	3-453-144-01	s SPRING, TENSION
513	3-563-104-00	s SPRING, TENSION
514	3-661-588-00	o SPACER (3X5)
515	3-669-596-00	s WASHER (2.3), STOPPER
516	3-738-730-01	s SPRING, COMPRESSION
517	4-880-426-00	o SPRING, COMPRESSION

Screws/Washers

Part No.	SP Description
7-621-773-95	s SCREW +B 2.6X6
7-623-422-07	s LW 3, TYPE B
7-623-924-11	s WASHER 3.0, NYLON
7-682-903-11	s SCREW +PWH 3X6
7-682-903-21	s SCREW +PWH 3X8
7-685-872-09	s SCREW +BVTT 3X8 (S)

Threading Ring

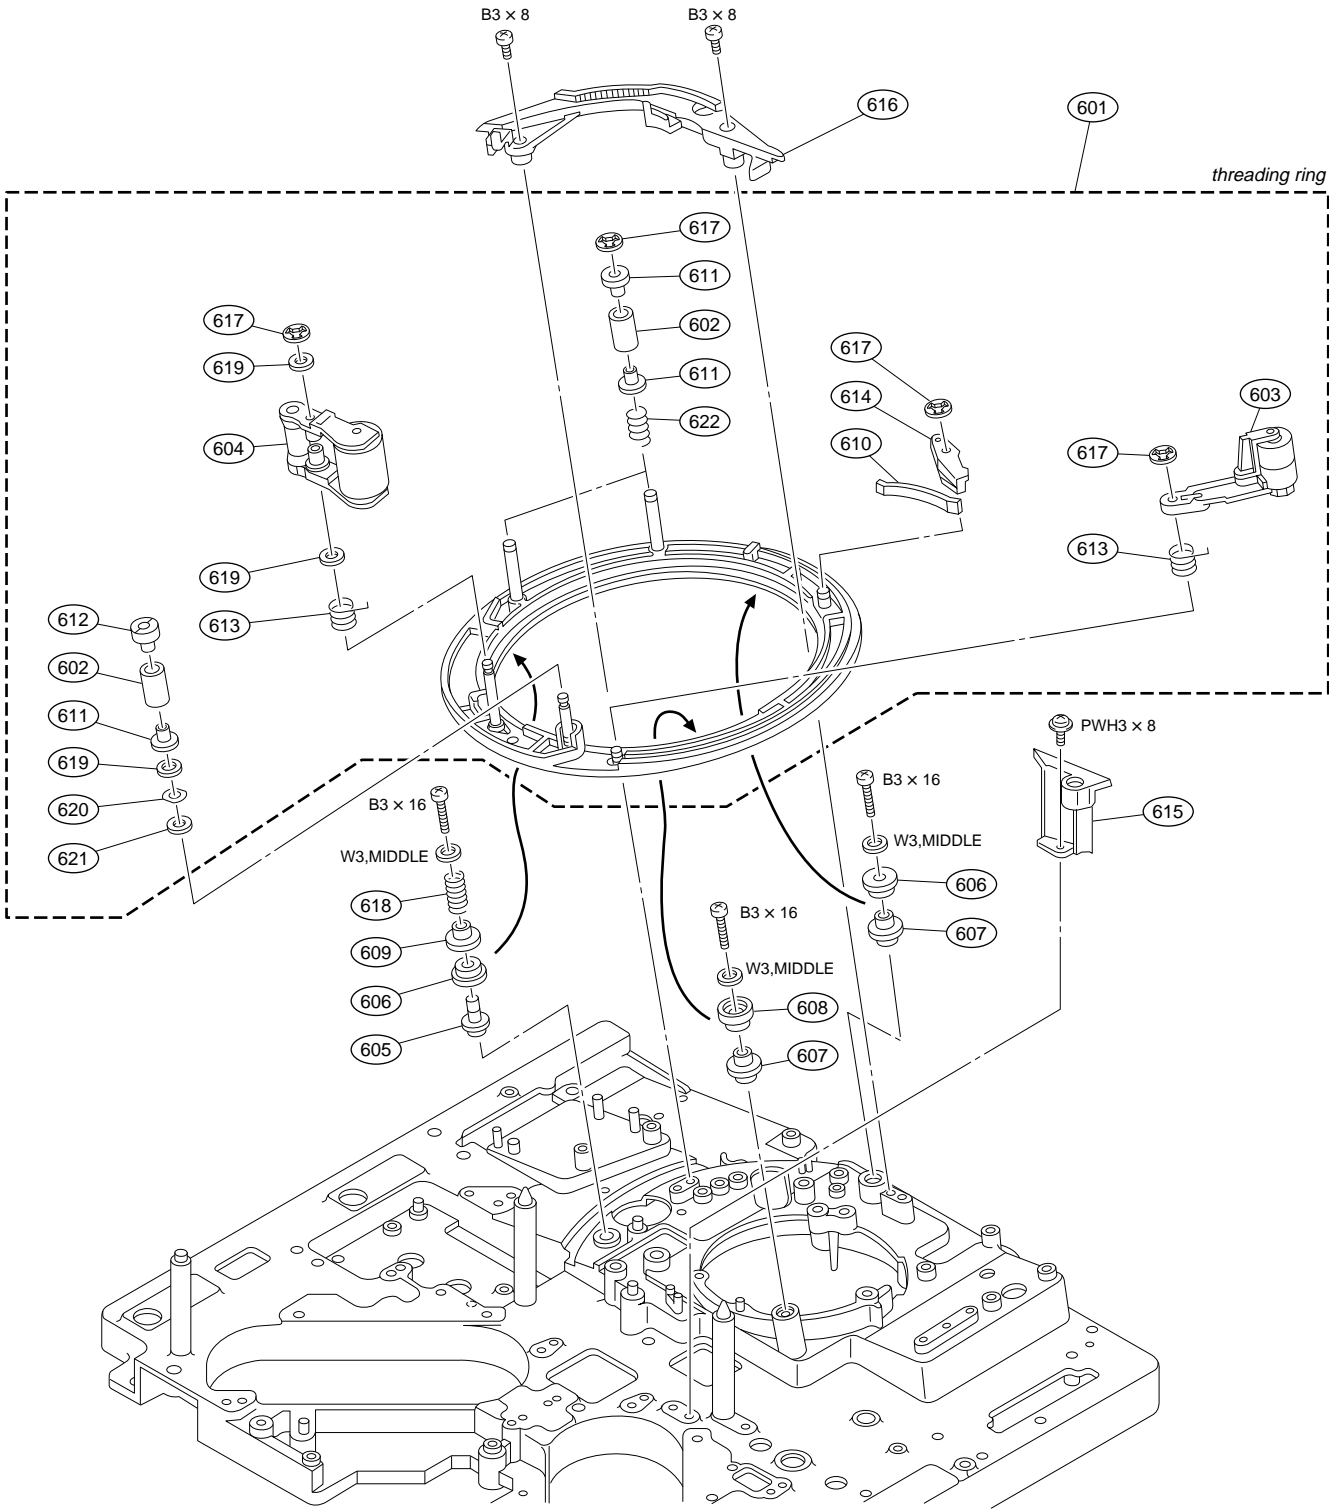


No.	Part No.	SP Description
601	A-8267-395-F	s RING ASSY, THREADING
602	X-3167-052-2	s ROLLER ASSY, ONEBARE
603	X-3167-053-2	s ARM ASSY, CL
604	X-3167-054-4	s ARM ASSY, PINCH
605	3-180-676-01	s SHAFT, (B) RING ROLLER
606	3-180-677-01	s ROLLER, RING
607	3-180-678-01	s SHAFT, RING ROLLER
608	3-180-679-01	s ROLLER, (B) RING
609	3-180-681-01	s ROLLER, (C) RING
610	3-180-772-01	s SPRING (RG), PLATE
611	3-180-773-02	s FLANGE, ONEBARE USE
612	3-180-774-03	s FLANGE, TG5 (UPPER)
613	3-180-849-01	s SPRING (C), TORSION
614	3-180-850-01	s ARM, LOCK
615	3-180-853-01	s GUARD, PINCH ARM
616	3-180-874-02	s RAIL, CL GUIDE
617	3-669-596-00	s WASHER (2.3), STOPPER
618	3-676-327-01	s SPRING, COMPRESSION
619	3-701-439-01	s WASHER, POLY 3mm DIA., 0.13T
	3-701-439-11	s WASHER, POLY 3mm DIA., 0.25T
	3-701-439-21	s WASHER, POLY 3mm DIA., 0.50T
620	3-714-587-01	o SPRING, LEAF
621	3-739-736-02	o BASE, SPRING
622	4-879-563-00	s SPRING, COMPRESSION

Screws/Washer

Part No.	SP Description
7-682-548-09	s SCREW +B 3X8
7-682-552-09	s SCREW +B 3X16
7-682-903-21	s SCREW +PWH 3X8
7-688-003-11	s W 3, MIDDLE

S Plate and AT Head

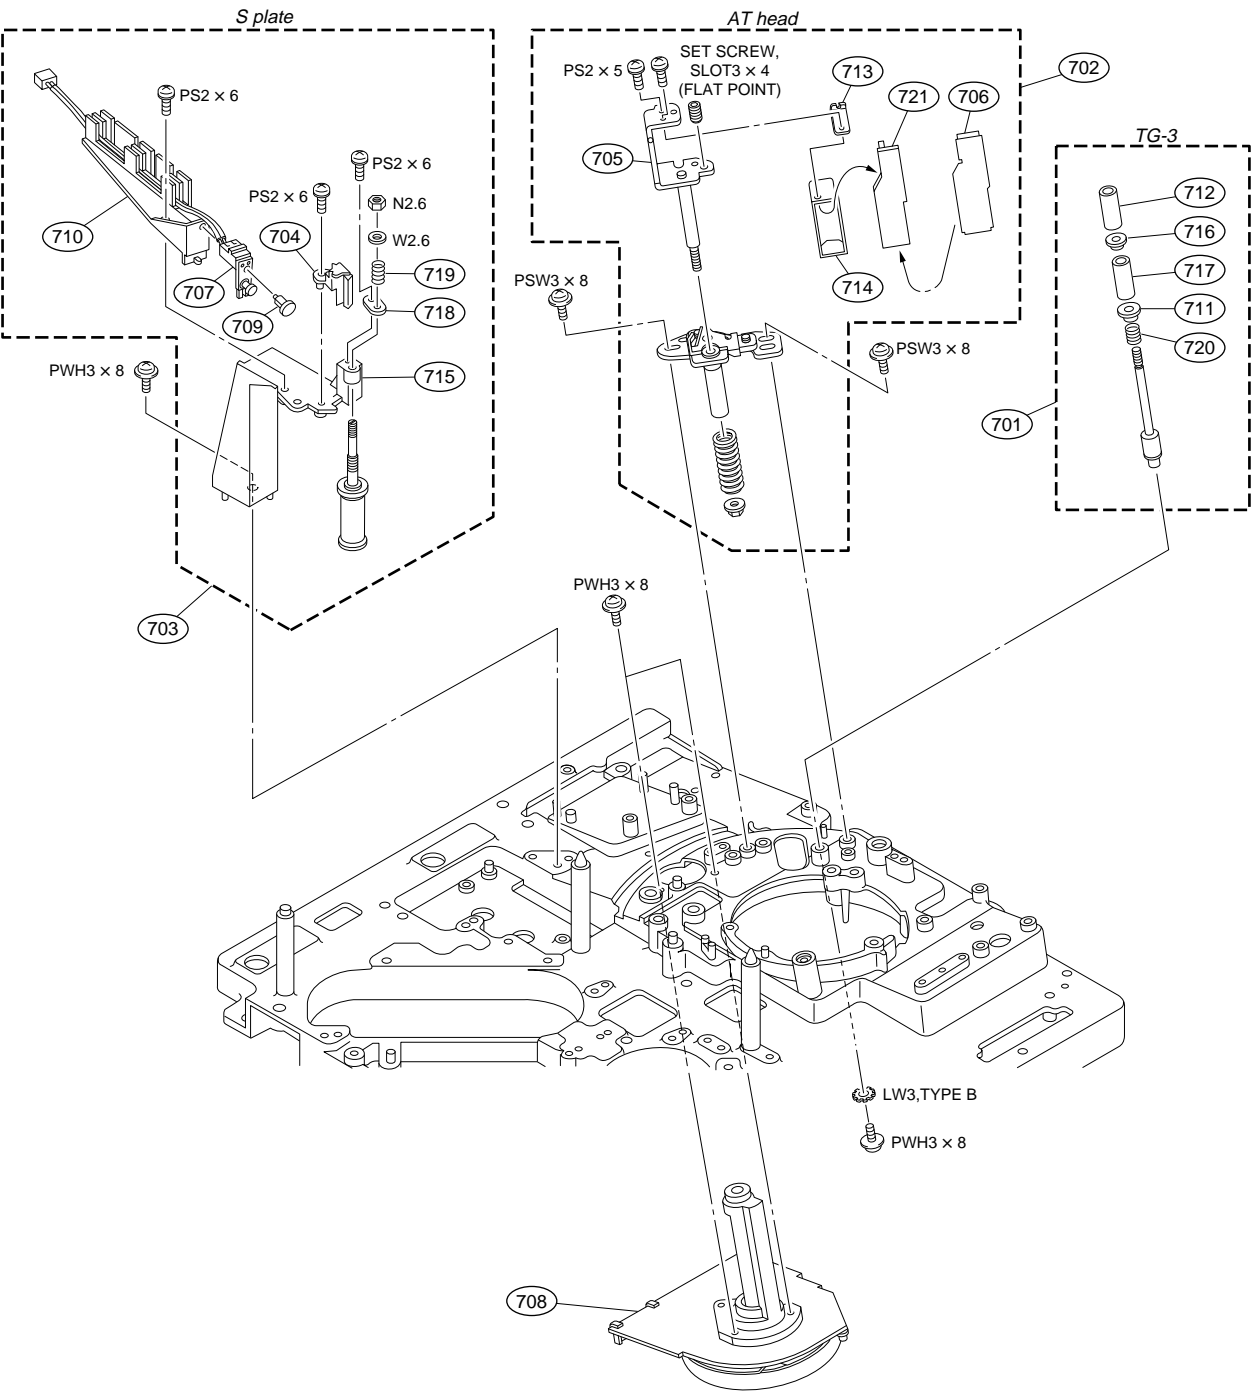


No.	Part No.	SP Description
701	A-8267-394-C	s TG-3 ASSY
702	A-8267-422-B	o HEAD ASSY, AT
703	A-8278-311-C	o PLATE ASSY, S
704	A-8278-345-B	o TURN BLADE ASSY
705	X-3167-061-2	o BRACKET ASSY, AT
706	X-3167-142-2	o PLATE, SHIELD ASSY, AT
707	1-543-316-31	s HEAD, SENSING (SMALL TYPE)
708	1-698-179-12	s MOTOR, DC (CAPSTAN)
709	2-279-715-01	s RIVET, NYLON
710	3-180-403-01	o HOLDER, SENSOR
711	3-180-669-02	s FLANGE, FIXED GUIDE USE
712	3-180-670-01	o NUT, FIXED GUIDE ADJUSTMENT
713	3-180-826-01	o GOOSENECK PLATE
714	3-180-829-04	o CASE, SHIELD AT
715	3-180-869-04	s PLATE, (S)
716	3-181-489-01	s FLANGE, DIA. 8
717	3-181-491-01	o SLEEVE, DIA. 6
718	3-183-823-01	o BRACKET, GUIDE RETAINER
719	3-669-316-00	s SPRING, COMPRESSION
720	3-738-730-01	s SPRING, COMPRESSION
721	8-825-778-23	s HEAD, AUDIO EPS244-2103G

Screws/Washers

Part No.	SP Description
7-622-207-05	s N 2.6, TYPE 2
7-623-422-07	s LW 3, TYPE B
7-628-253-15	s SCREW +PS 2X5
7-628-253-20	s SCREW +PS 2X6
7-682-903-21	s SCREW +PWH 3X8
7-682-948-01	s SCREW +PSW 3X8
7-683-174-01	s SET-SCREW, SLOT 3X4 FLAT POINT
7-688-002-11	s W 2.6, MIDDLE

Threading Motor and Pinch Press Block

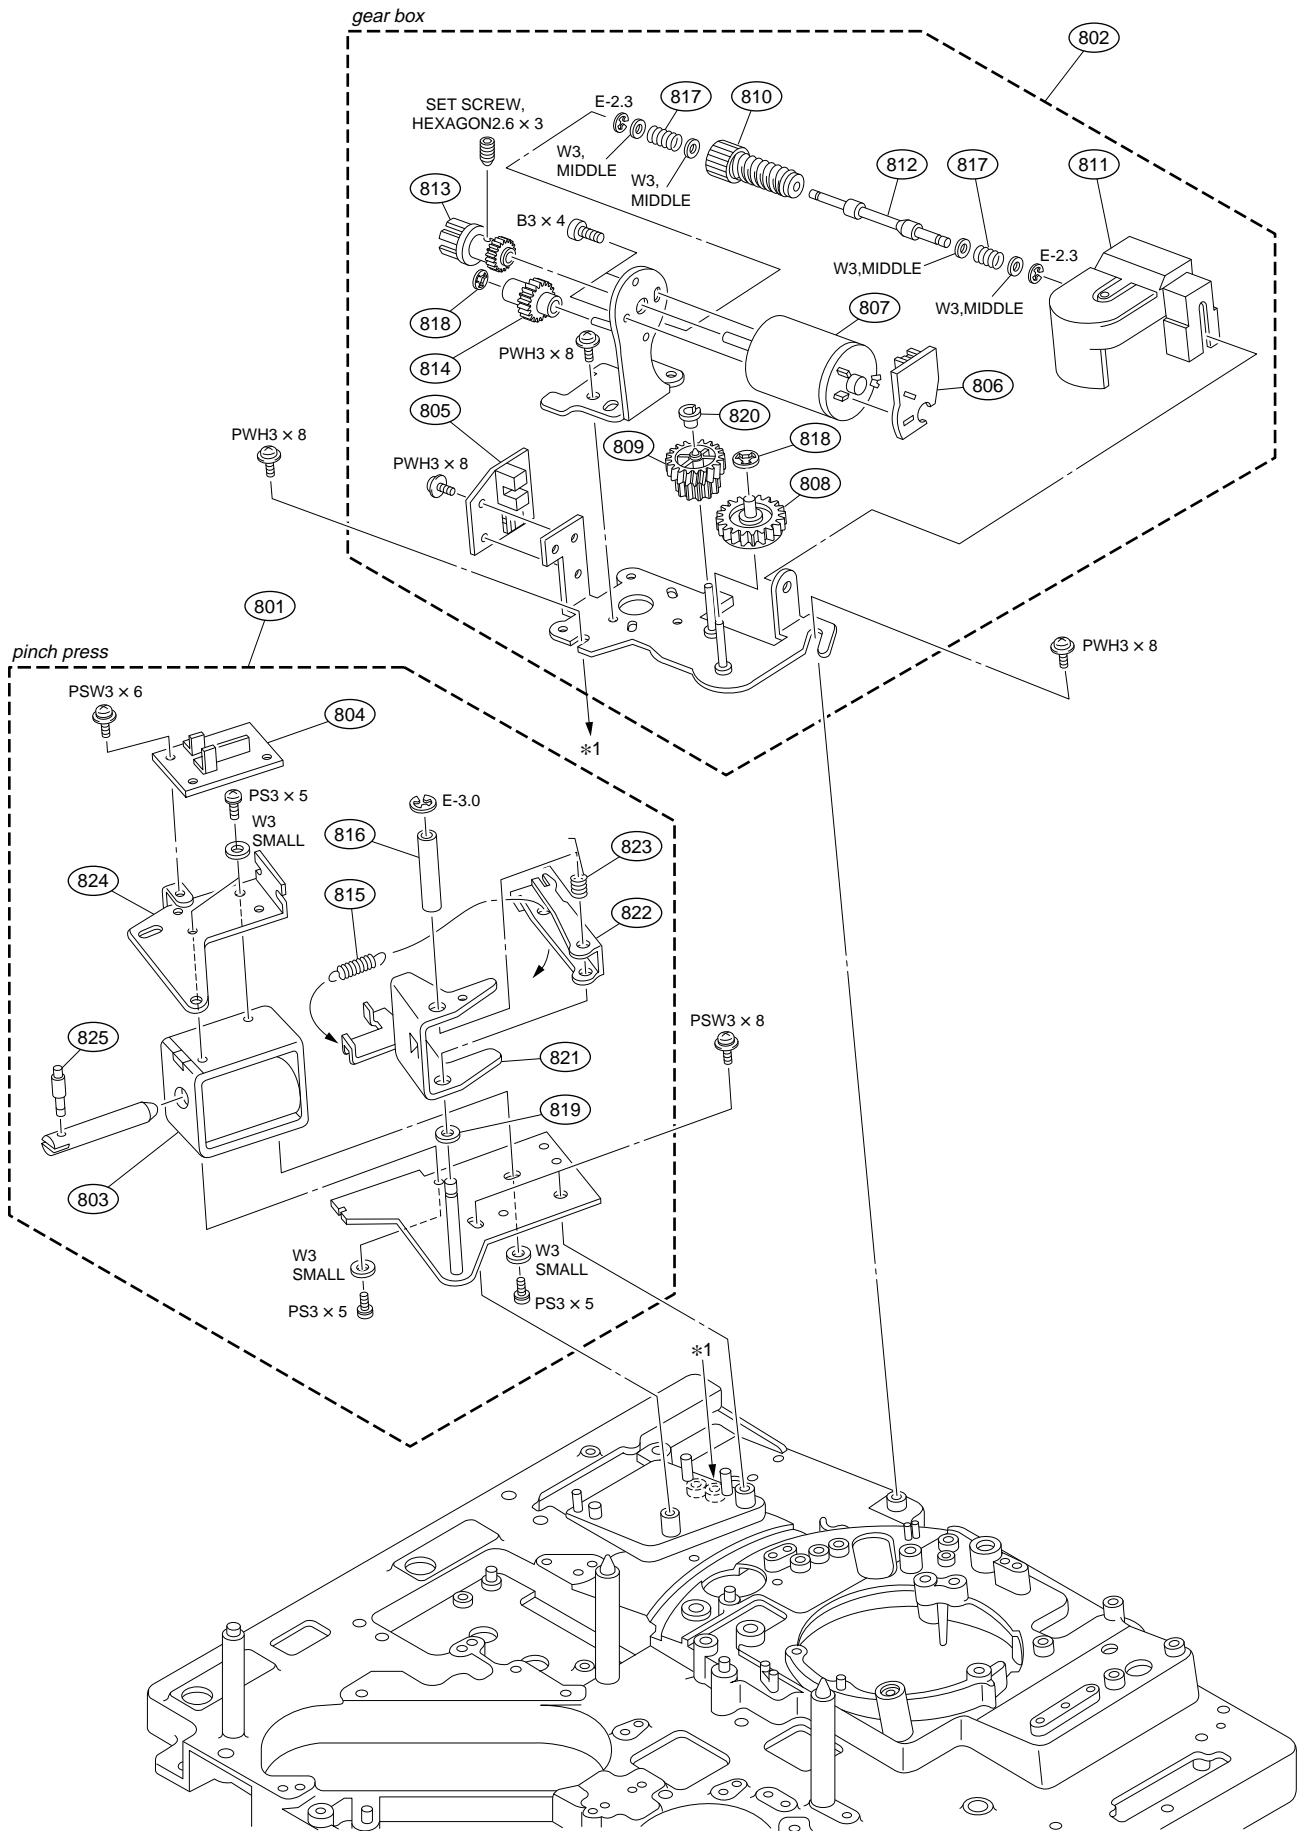


No.	Part No.	SP Description
801	A-6749-117-C	o PRESS ASSY, PINCH
802	A-8273-997-A	s BOX ASSY, GEAR
803	1-454-338-00	s SOLENOID, PLUNGER
804	1-622-596-11	o PRINTED CIRCUIT BOARD, PD-35
805	1-640-163-12	o PRINTED CIRCUIT BOARD, PTC-54
806	1-648-570-11	o PRINTED CIRCUIT BOARD, CCM-15
807	1-698-152-11	s MOTOR, DC (SVD-1449)
808	3-180-717-01	s GEAR, RING
809	3-180-718-01	s GEAR, DRIVE
810	3-180-719-01	s GEAR, WORM
811	3-180-720-01	o GUARD, WORM
812	3-180-843-02	o SHAFT, WORM
813	3-180-844-01	s GEAR, (M)
814	3-180-845-01	s (B), GEAR
815	3-537-674-03	s SPRING, TENSION
816	3-653-382-01	o SPACER (4X25)
817	3-659-324-00	s SPRING, COMPRESSION
818	3-669-596-00	s WASHER (2.3), STOPPER
819	3-701-441-21	s WASHER, POLY 4mm DIA., 0.50T
820	3-703-074-01	s CAP 3, SHAFT
821	3-717-246-01	o LEVER, PRESS, P
822	3-717-247-01	o LIMITER, P
823	3-717-248-01	o SPRING
824	3-717-249-01	o STOPPER, P
825	3-717-250-02	o SHAFT, JOINT, P

Screws/Washers

Part No.	SP Description
7-621-734-09	s SET-SCT, HEX. 2.6X3
7-624-105-04	s STOP RING 2.3, TYPE -E
7-624-106-04	s STOP RING 3.0, TYPE -E
7-682-545-09	s SCREW +B 3X4
7-682-646-09	s SCREW +PS 3X5
7-682-903-21	s SCREW +PWH 3X8
7-682-947-01	s SCREW +PSW 3X6
7-682-948-01	s SCREW +PSW 3X8
7-688-003-01	s W 3, SMALL
7-688-003-11	s W 3, MIDDLE

T-arm and T Tension Regulator

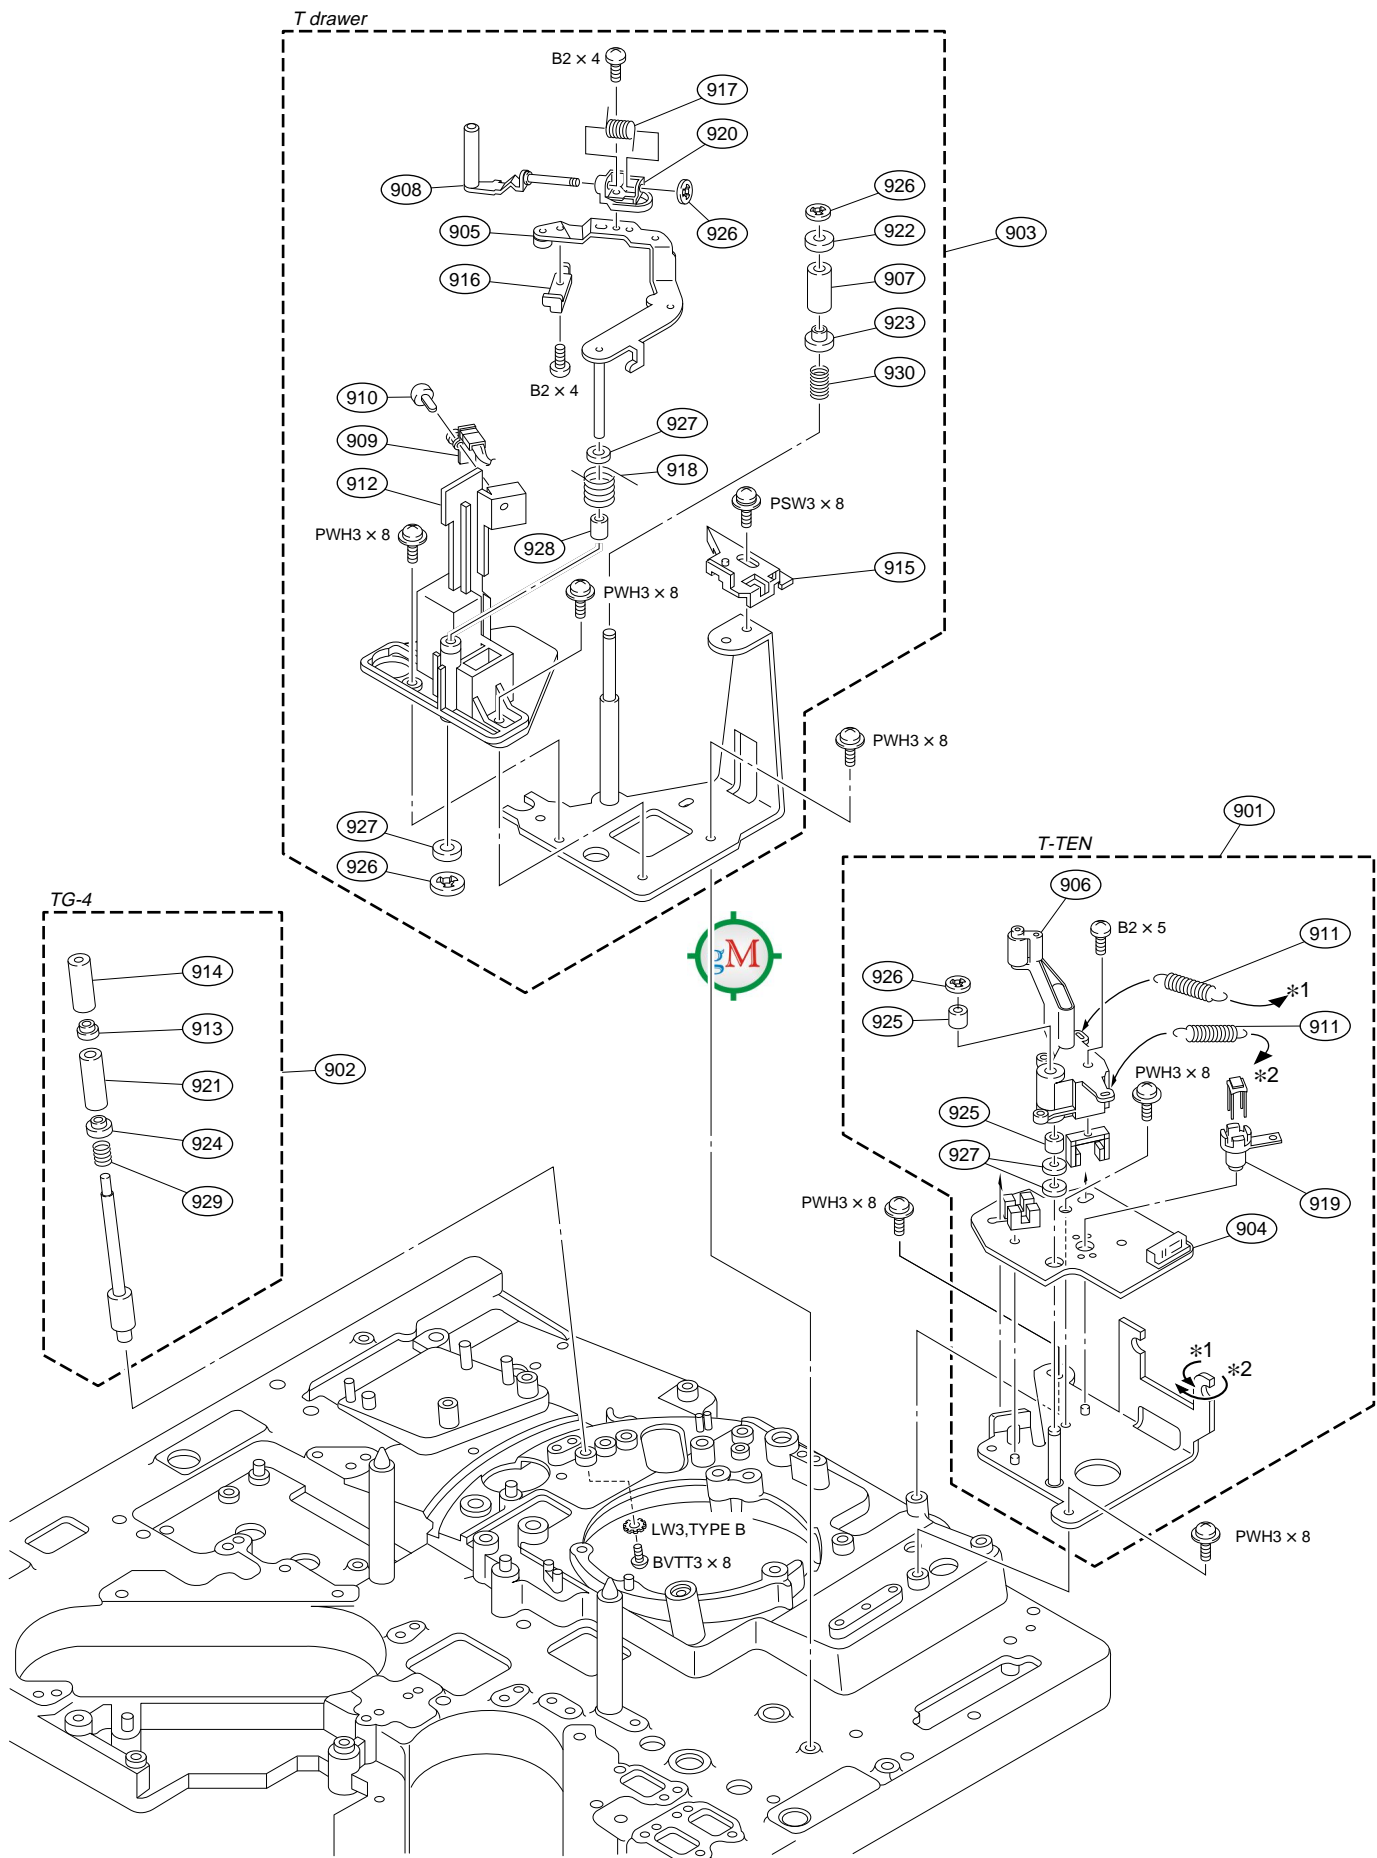


No.	Part No.	SP Description
901	A-8267-423-B	s T-TEN ASSY
902	A-8267-555-D	s TG-4 ASSY
903	A-8274-876-D	s DRAWER ASSY (T)
904	A-8276-628-A	o MOUNTED CIRCUIT BOARD, TR-79
905	X-3167-063-4	s ARM ASSY, DRAWING, T
906	X-3167-064-5	s ARM ASSY, T-TEN
907	X-3167-347-2	s ROLLER ASSY, GUIDE
908	X-3678-288-1	s GUIDE ASSY, SLANT
909	1-543-316-31	s HEAD, SENSING (SMALL TYPE)
910	2-279-715-01	s RIVET, NYLON
911	3-180-262-01	s SPRING, EXTENSION
912	3-180-404-02	o BASE, DRAWING, (T)
913	3-180-669-02	s FLANGE, FIXED GUIDE USE
914	3-180-670-01	o NUT, FIXED GUIDE ADJUSTMENT
915	3-180-708-01	s PLATE, SLANT GUIDE ADJUSTMENT
916	3-180-710-03	s GUARD, DRAWER
917	3-180-715-01	s SPRING, (A) TORSION COIL
918	3-180-716-02	s SPRING, (B) TORSION COIL
919	3-180-861-01	o HOLDER, DME
920	3-180-863-03	s BASE, SLANT GUIDE
921	3-181-490-01	o SLEEVE, DIA. 7
922	3-183-460-02	s FLANGE (B), UPPER
923	3-183-462-02	s FLANGE, LOWER
924	3-190-819-01	s FLANGE (1), DIA. 8
925	3-645-028-00	s BEARING, BALL
926	3-669-596-00	s WASHER (2.3), STOPPER
927	3-701-439-01	s WASHER, POLY 3mm DIA., 0.13T
	3-701-439-11	s WASHER, POLY 3mm DIA., 0.25T
	3-701-439-21	s WASHER, POLY 3mm DIA., 0.50T
928	3-717-253-01	s ROLLER
929	3-738-730-01	s SPRING, COMPRESSION
930	4-879-563-00	s SPRING, COMPRESSION

Screws/Washer

Part No.	SP Description
7-621-772-10	s SCREW +B 2X4
7-621-772-20	s SCREW +B 2X5
7-623-422-07	s LW 3, TYPE B
7-682-903-21	s SCREW +PWH 3X8
7-682-948-01	s SCREW +PSW 3X8
7-685-872-09	s SCREW +BVTT 3X8 (S)

Cassette Compartment

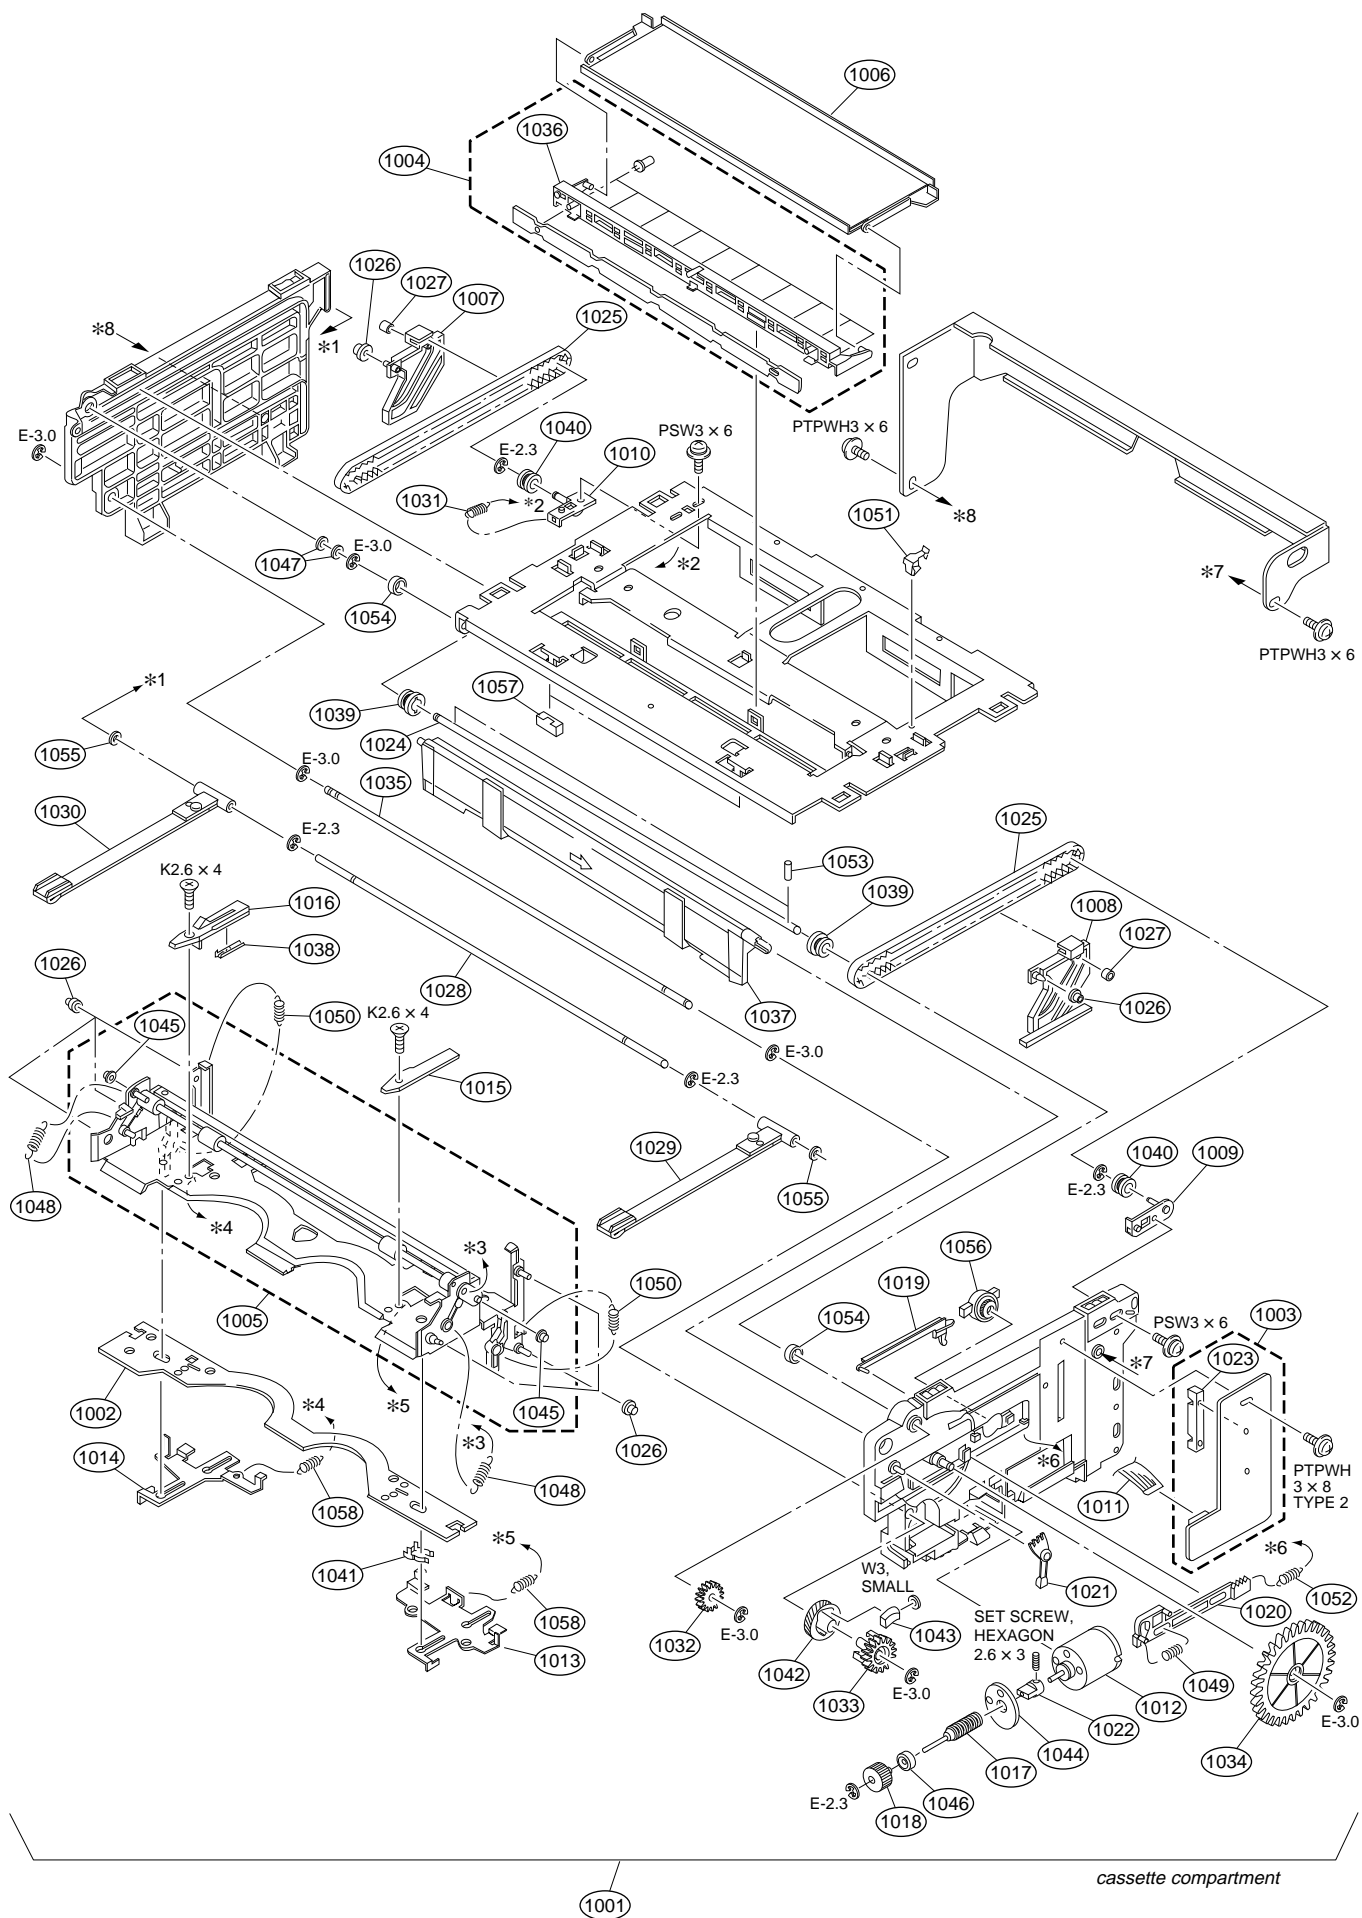


No.	Part No.	SP Description
1001	A-8267-589-F	s CASSETE COMPRATMENT ASSY
1002	A-8276-625-A	o MOUNTED CIRCUIT BOARD, PC-70
1003	A-8276-626-B	o MOUNTED CIRCUIT BOARD, CL-29
1004	A-8276-627-A	o MOUNTED CIRCUIT BOARD, LP-81
1005	A-8276-957-B	s STAGE ASSY (RP)
1006	X-3166-217-1	s MIRROR ASSY
1007	X-3167-446-3	o SLIDER (L) ASSY
1008	X-3167-447-3	o SLIDER (R) ASSY
1009	X-3167-848-1	o DECK (R) ASSY, PULLEY
1010	X-3167-849-1	o DECK (L) ASSY, PULLEY
1011	1-665-836-11	s FLEXIBLE CIRCUIT BOARD, CL-41
1012	1-698-152-11	s MOTOR, DC (SVD-1449)
1013	3-171-367-06	o SWITCH (R), IN
1014	3-171-398-05	o SWITCH (L), IN
1015	3-171-399-02	o GUIDE (R), CASSETTE
1016	3-171-400-04	s GUIDE (L), CASSETTE
1017	3-171-418-03	s WORM
1018	3-171-419-11	s WHEEL
1019	3-171-420-03	o SHUTTER
1020	3-171-421-01	o SLIDER, DOOR SWITCHING
1021	3-171-422-01	o LEVER, DOOR SWITCHING
1022	3-171-423-02	o JOINT, MOTOR
1023	3-171-424-02	o HOLDER, SENSOR
1024	3-171-457-03	o SHAFT, JOINT
1025	3-171-458-01	s BELT, TIMING
1026	3-171-459-01	s ROLLER, GUIDE
1027	3-171-460-01	s ROLLER, SLIDER
1028	3-171-461-04	o SHAFT, RETAINER, L CASSETTE
1029	X-3168-049-1	s LEAF SPRING (R) ASSY
1030	X-3168-050-1	s LEAF SPRING (L) ASSY
1031	3-194-680-01	s SPRING, EXTENSION
1032	3-171-465-01	o GEAR, DRIVING
1033	3-171-466-02	o GEAR, LIMITER
1034	3-171-479-01	o GEAR, MIDWAY
1035	3-171-480-01	o SHAFT, WORM WHEEL
1036	3-171-508-04	o HOLDER, LAMP
1037	3-171-510-02	s DOOR, CASSETTE
1038	3-176-139-01	s SPRING, C GUIDE
1039	3-176-583-01	o PULLEY (A)
1040	3-176-584-01	o PULLEY (B)
1041	3-176-598-02	o SPRING, GROUND
1042	3-181-430-01	o WHEEL, WORM
1043	3-181-431-01	o RUBBER, LIMITER
1044	3-182-706-01	s SPACER
1045	3-188-273-01	s ROLLER (B), GUIDE
1046	3-188-745-01	s BALL BEARING, NON-FLANGED
1047	3-701-441-21	s WASHER, POLY 4mm DIA., 0.50T
1048	3-548-757-00	s SPRING, TENSION
1049	3-579-759-00	s SPRING, COMPRESSION
1050	3-646-214-00	s SPRING
1051	3-671-150-01	o CLAMP
1052	3-672-461-00	s SPRING, TENSION
1053	3-677-193-00	o PIN, STOPPER
1054	3-698-217-11	s BEARING (NO FLANGE), BALL
1055	3-701-439-21	s WASHER, POLY 3mm DIA., 0.50T
1056	3-712-786-01	s DAMPER, OIL
1057	3-717-369-04	o STOPPER, DOOR
1058	4-858-799-00	s SPRING, TENSION

Screws/Washers

Part No.	SP Description
7-621-559-20	s SCREW +K 2.6X4
7-621-734-09	s SET-SCT, HEX. 2.6X3
7-624-105-04	s STOP RING 2.3, TYPE -E
7-624-106-04	s STOP RING 3.0, TYPE -E
7-682-947-01	s SCREW +PSW 3X6
7-685-903-11	s SCREW +PTPWH 3X6 (TYPE2)
7-685-903-21	s SCREW +PTPWH 3X8 (TYPE2)
7-688-003-01	s W 3, SMALL

Mounted Circuit Boards (Bottom Side)

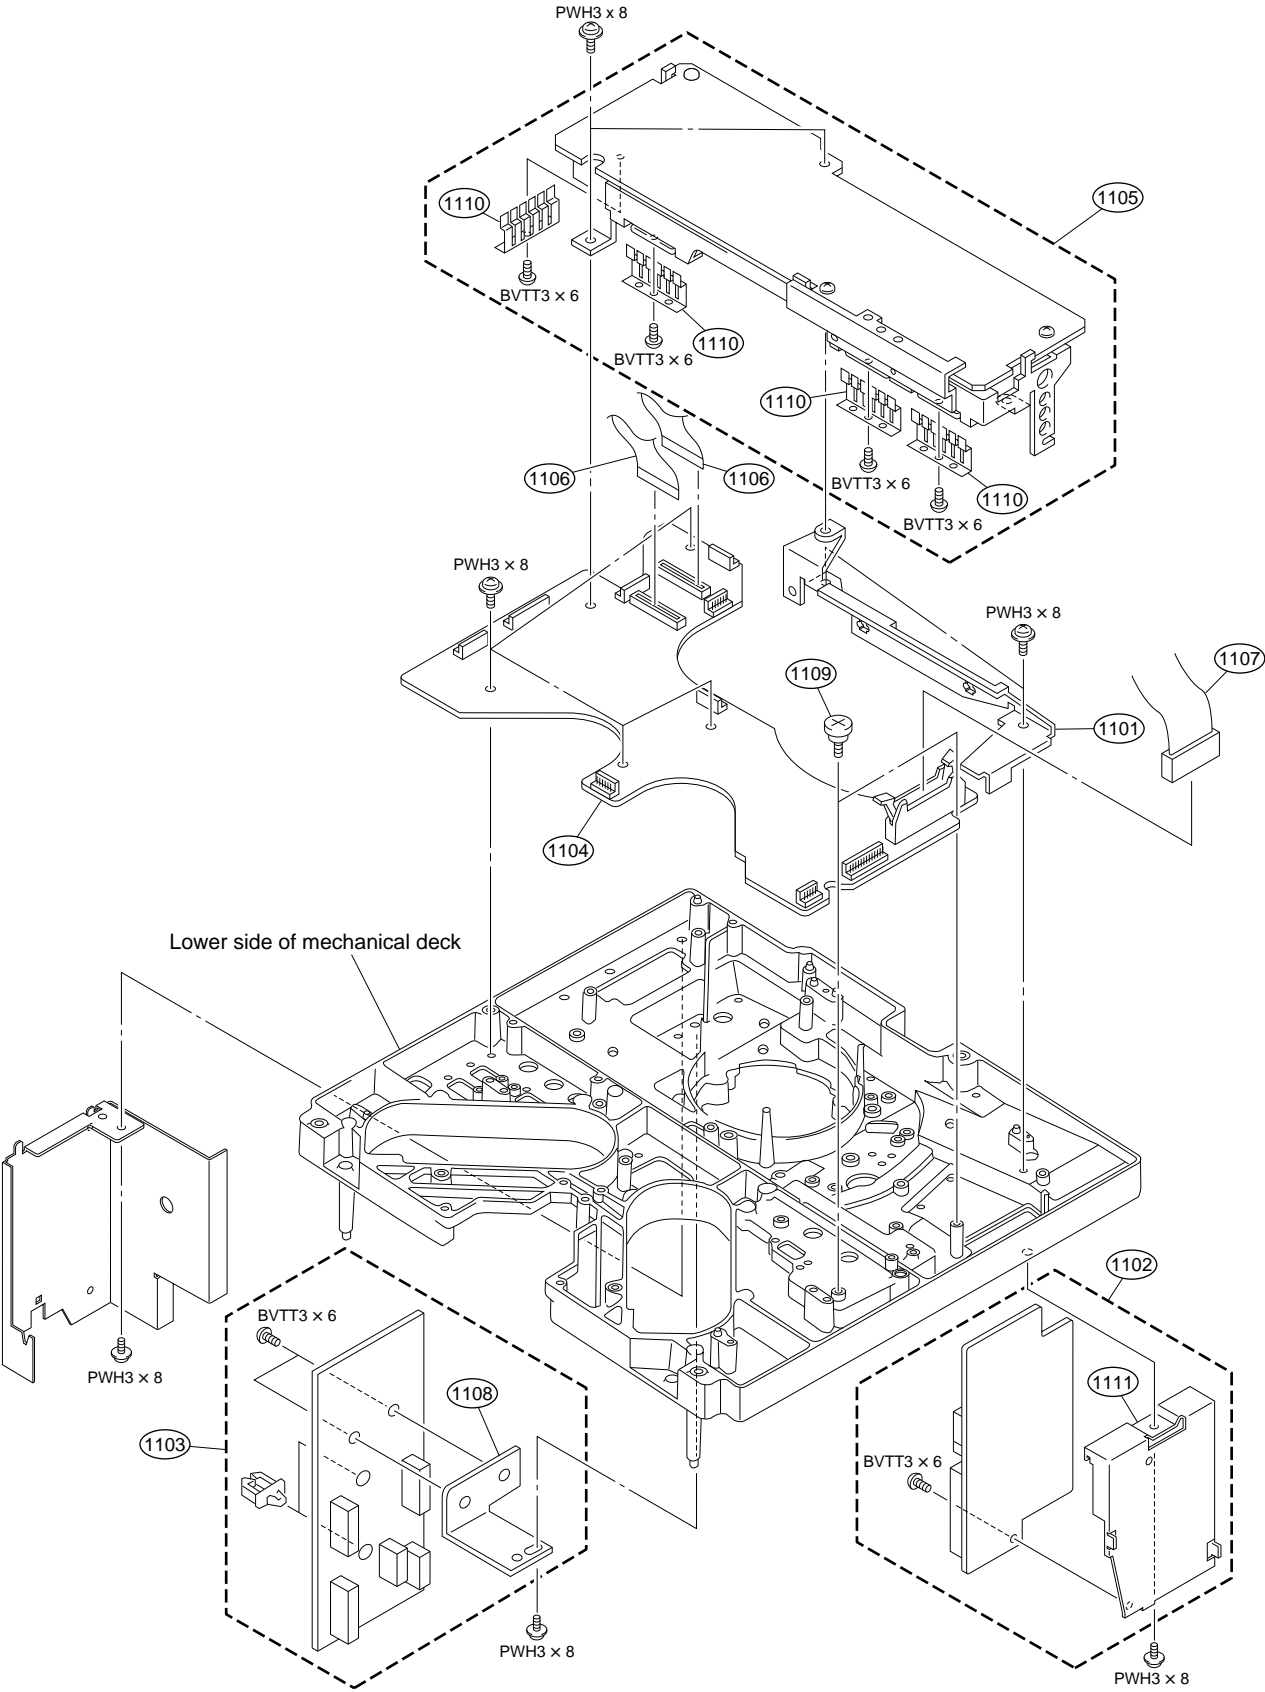


No.	Part No.	SP Description
1101	A-8278-308-A	o BRACKET ASSY, DR
1102	A-8319-299-A	o MOUNTED CIRCUIT BOARD, TC-102
1103	A-8323-236-A	o MOUNTED CIRCUIT BOARD, SE-461E
1104	A-8323-238-A	o MOUNTED CIRCUIT BOARD, MS-58E
1105	A-8323-252-A	o MOUNTED CIRCUIT BOARD, DR-315K (75)
1106	1-777-206-11	o WIRE (FLAT TYPE) (24 CORE)
1107	1-777-210-11	o CABLE ASSEMBLY, FLAT (50 CORE)
1108	3-603-396-01	o BRACKET, DEW SENSOR
1109	3-671-135-00	s SCREW, STEP
1110	3-696-737-01	o BRACKET, TRANSISTOR
1111	3-697-416-01	o BRACKET, TC-96

Screws

Part No.	SP Description
7-682-903-21	s SCREW +PWH 3X8
7-685-871-01	s SCREW +BVTT 3X6 (S)

Outer Panels

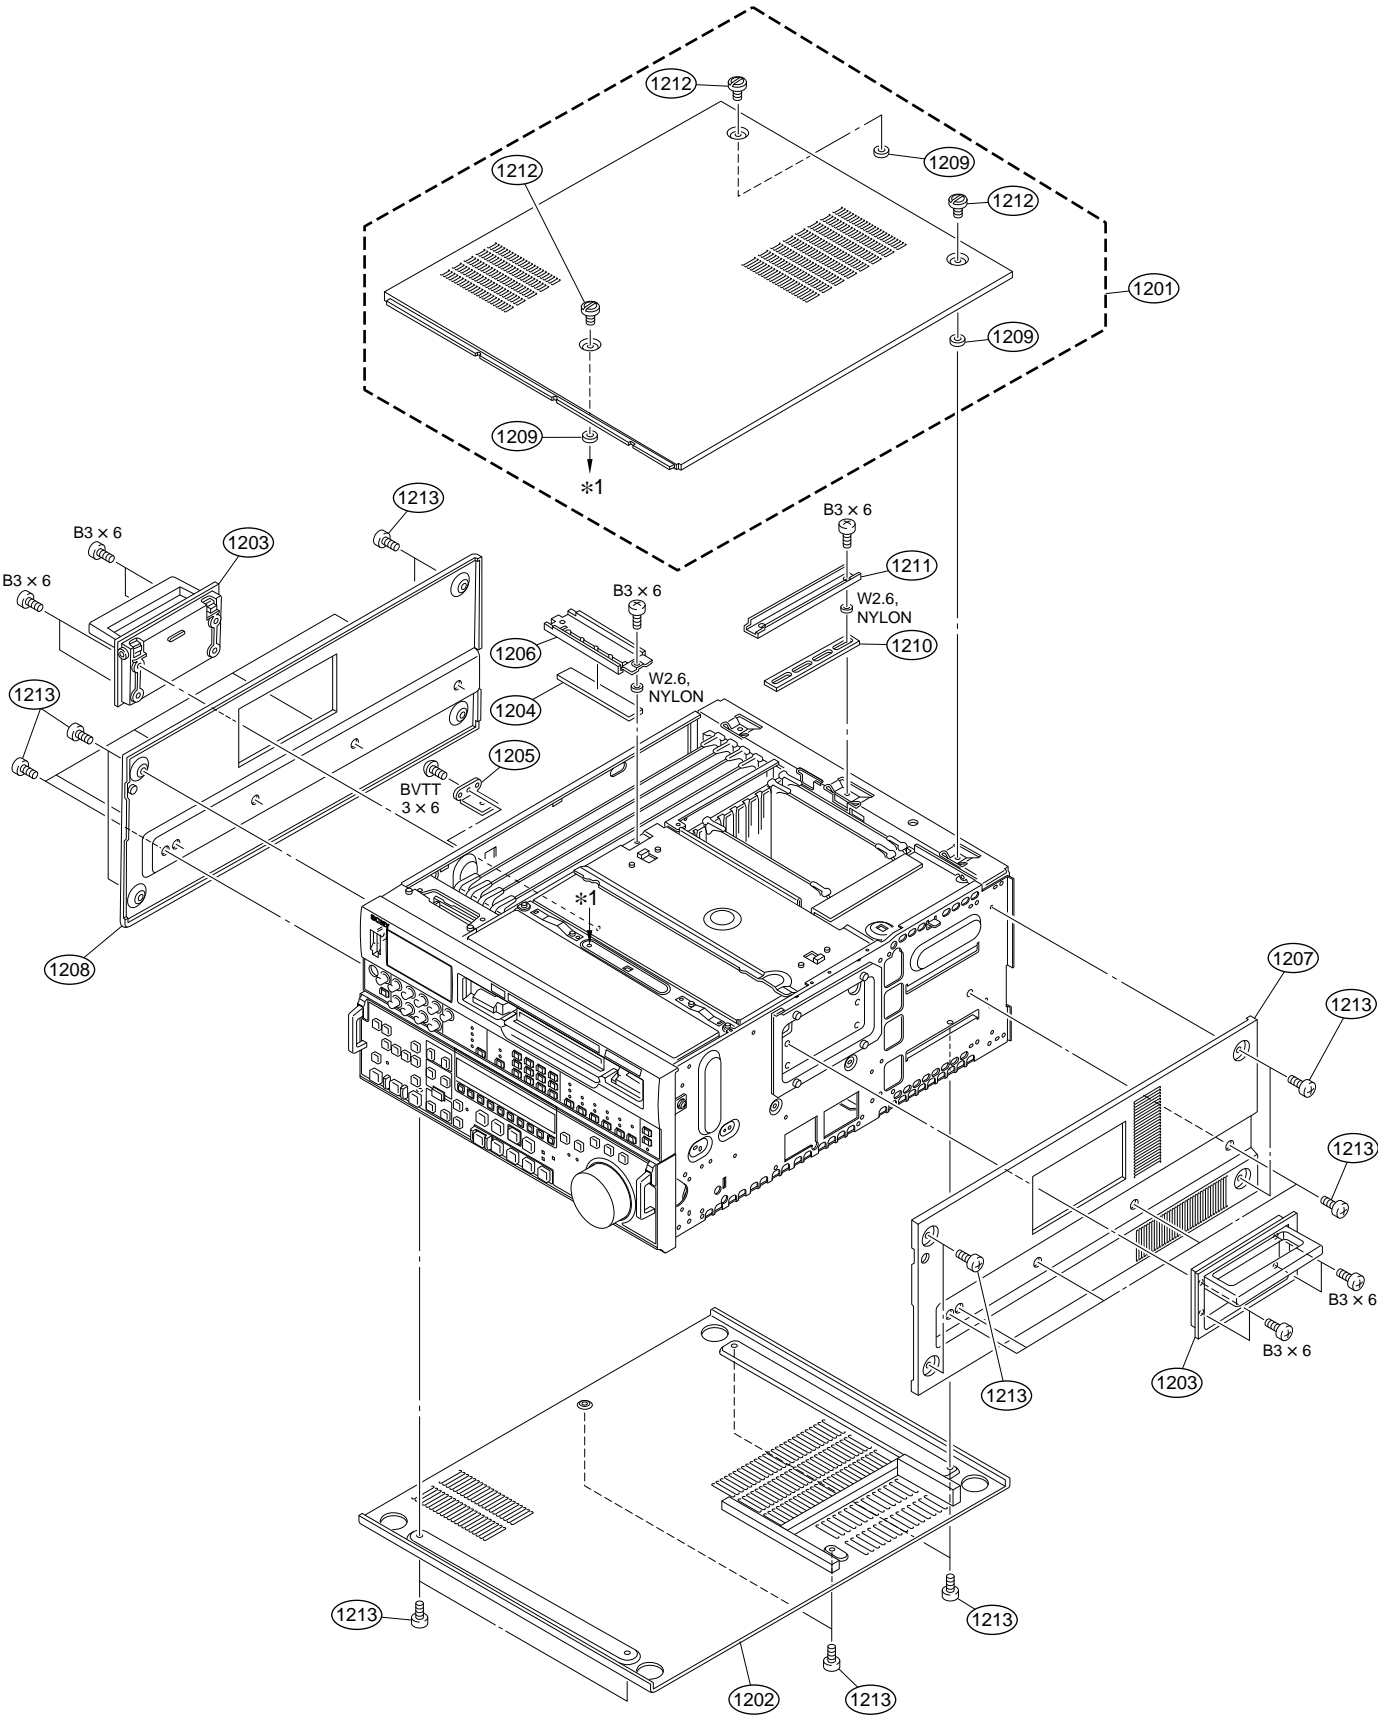


No.	Part No.	SP Description
1201	A-8278-844-A	o ASSY LID, UPPER
1202	X-3604-683-3	o PLATE ASSY, BOTTOM (For DNW-75/75P (E))
	X-3604-661-4	o PLATE ASSY, BOTTOM (For DNW-75 (J))
1203	X-3642-018-3	o HANDLE ASSY
1204	3-171-410-01	o RETAINER (S), PC BOARD
1205	3-171-489-01	o BRACKET, PLATE, BOTTOM
1206	3-180-641-01	o PLATE (L), PC BOARD RETAINER
1207	3-615-773-02	o CABINET (RIGHT)
1208	3-615-774-01	o CABINET (LEFT)
1209	3-688-102-01	o SPACER, M4
1210	3-696-882-02	o CUSHION, PC BOARD RETAINER
1211	3-696-887-01	o RETAINER (S), PC BOARD
1212	3-717-392-02	o SCREW, LID
1213	3-733-690-01	s +B 4X6 (CU,NI)

Screws/Washer

Part No.	SP Description
7-623-923-11	s WASHER 2.6, NYLON
7-682-547-09	s SCREW +B 3X6
7-685-871-01	s SCREW +BVTT 3X6 (S)


Front Panel

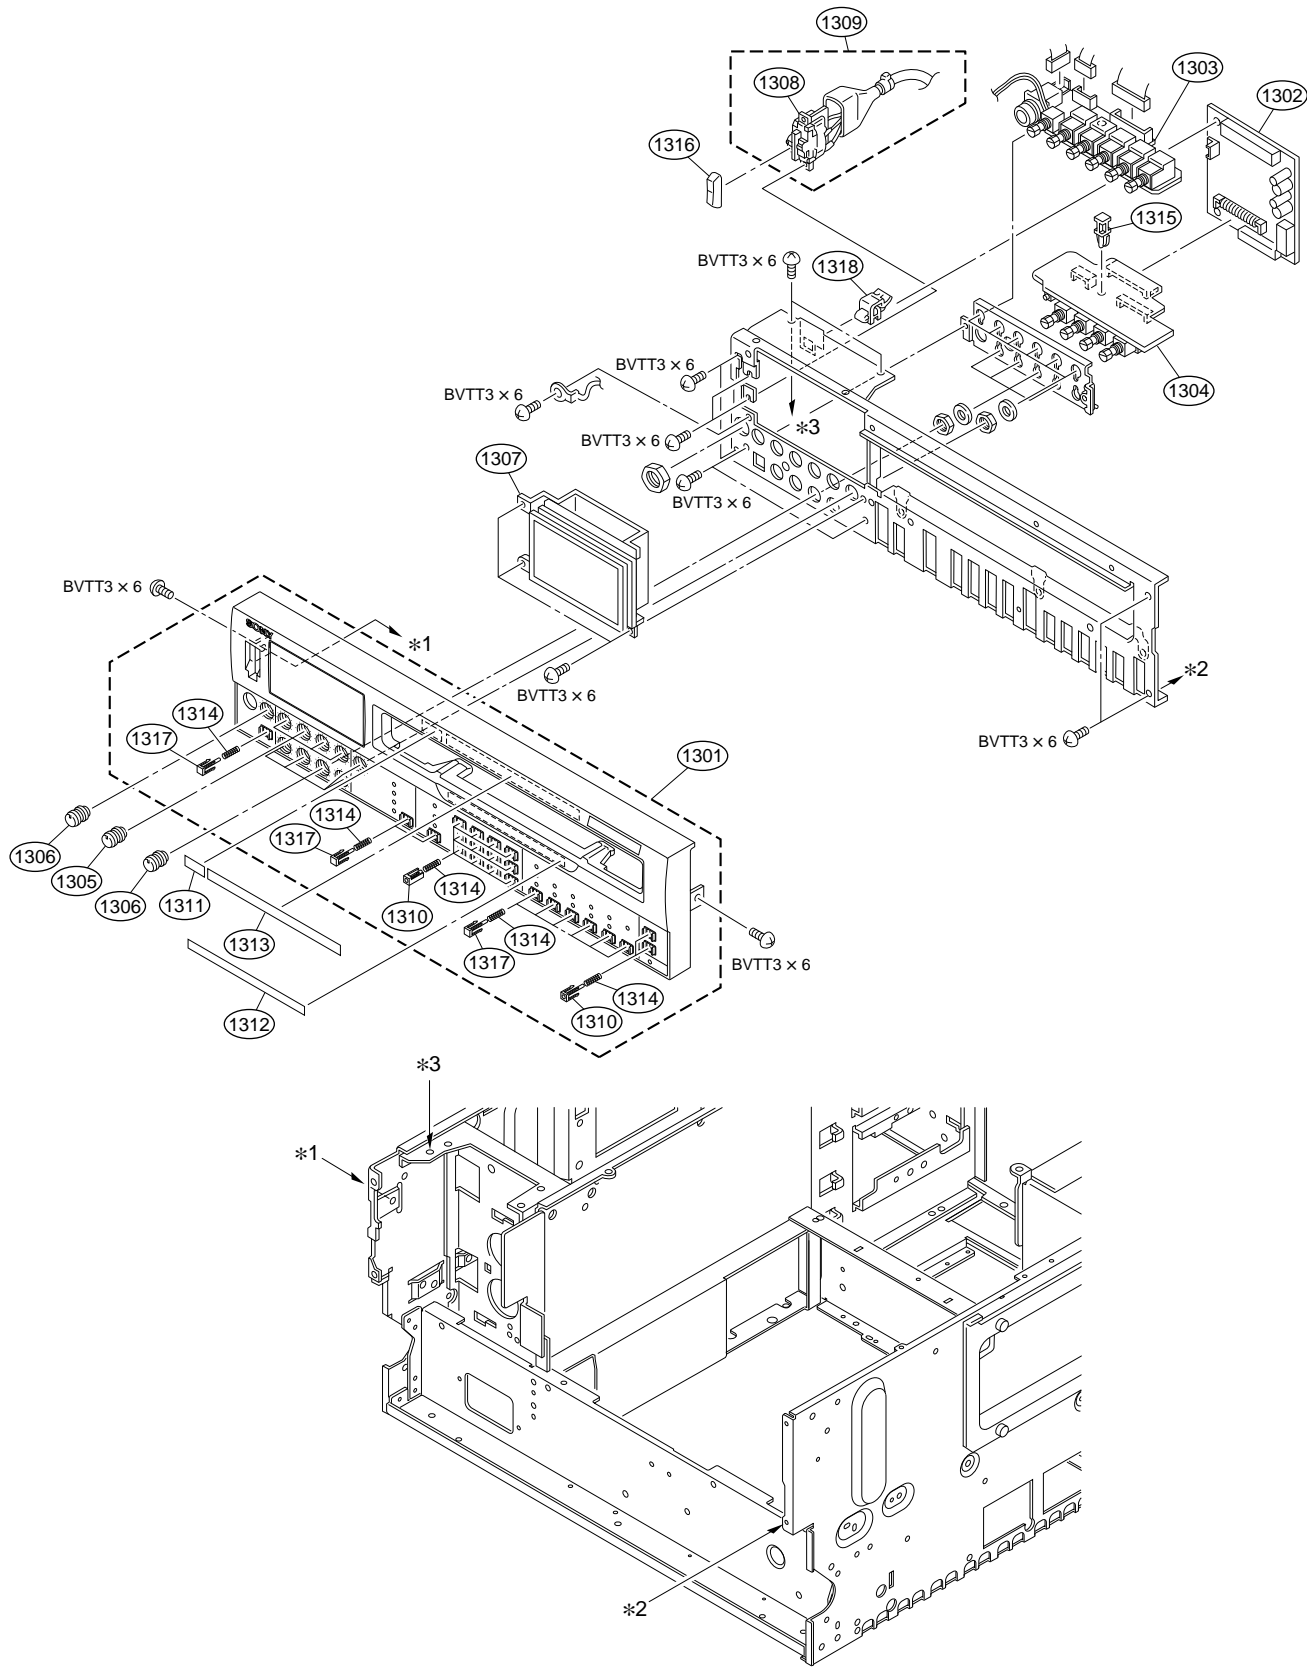

No.	Part No.	SP Description
1301	A-8278-848-E	o PANEL ASSY, FRONT
1302	A-8319-275-A	o MOUNTED CIRCUIT BOARD, FP-117
1303	A-8319-305-A	o MOUNTED CIRCUIT BOARD, VR-223K
1304	A-8319-307-A	o MOUNTED CIRCUIT BOARD, VR-224K
1305	X-3167-824-1	o KNOB ASSY (R), VOL
1306	X-3167-825-1	o KNOB ASSY (P), VOL
1307	1-517-185-42	o INDICATOR MODULE, FLUORESCENT
1308	▲ 1-762-953-11	s SWITCH, POWER
1309	1-959-050-12	o HARNESS, SUB (POWER SW)
1310	3-180-822-13	s KEY TOP 6X6, USE
1311	3-184-994-03	o ISR STICKER (S)
1312	3-202-864-01	o LABEL, DIGITAL
1313	3-202-865-01	o LABEL (For DNW-75)
	3-202-866-01	o LABEL (P) (For DNW-75P)
1314	3-611-769-01	s SPRING, COMPRESSION
1315	3-682-057-21	s SPACER (SMALL)
1316	3-688-814-31	s CAP, SWITCH
1317	3-696-774-12	s TOP KEY 6X6
1318	3-703-141-00	o HOLDER, PC BOARD

Screw

Part No.	SP Description
7-685-871-01	s SCREW +BVTT 3X6 (S)

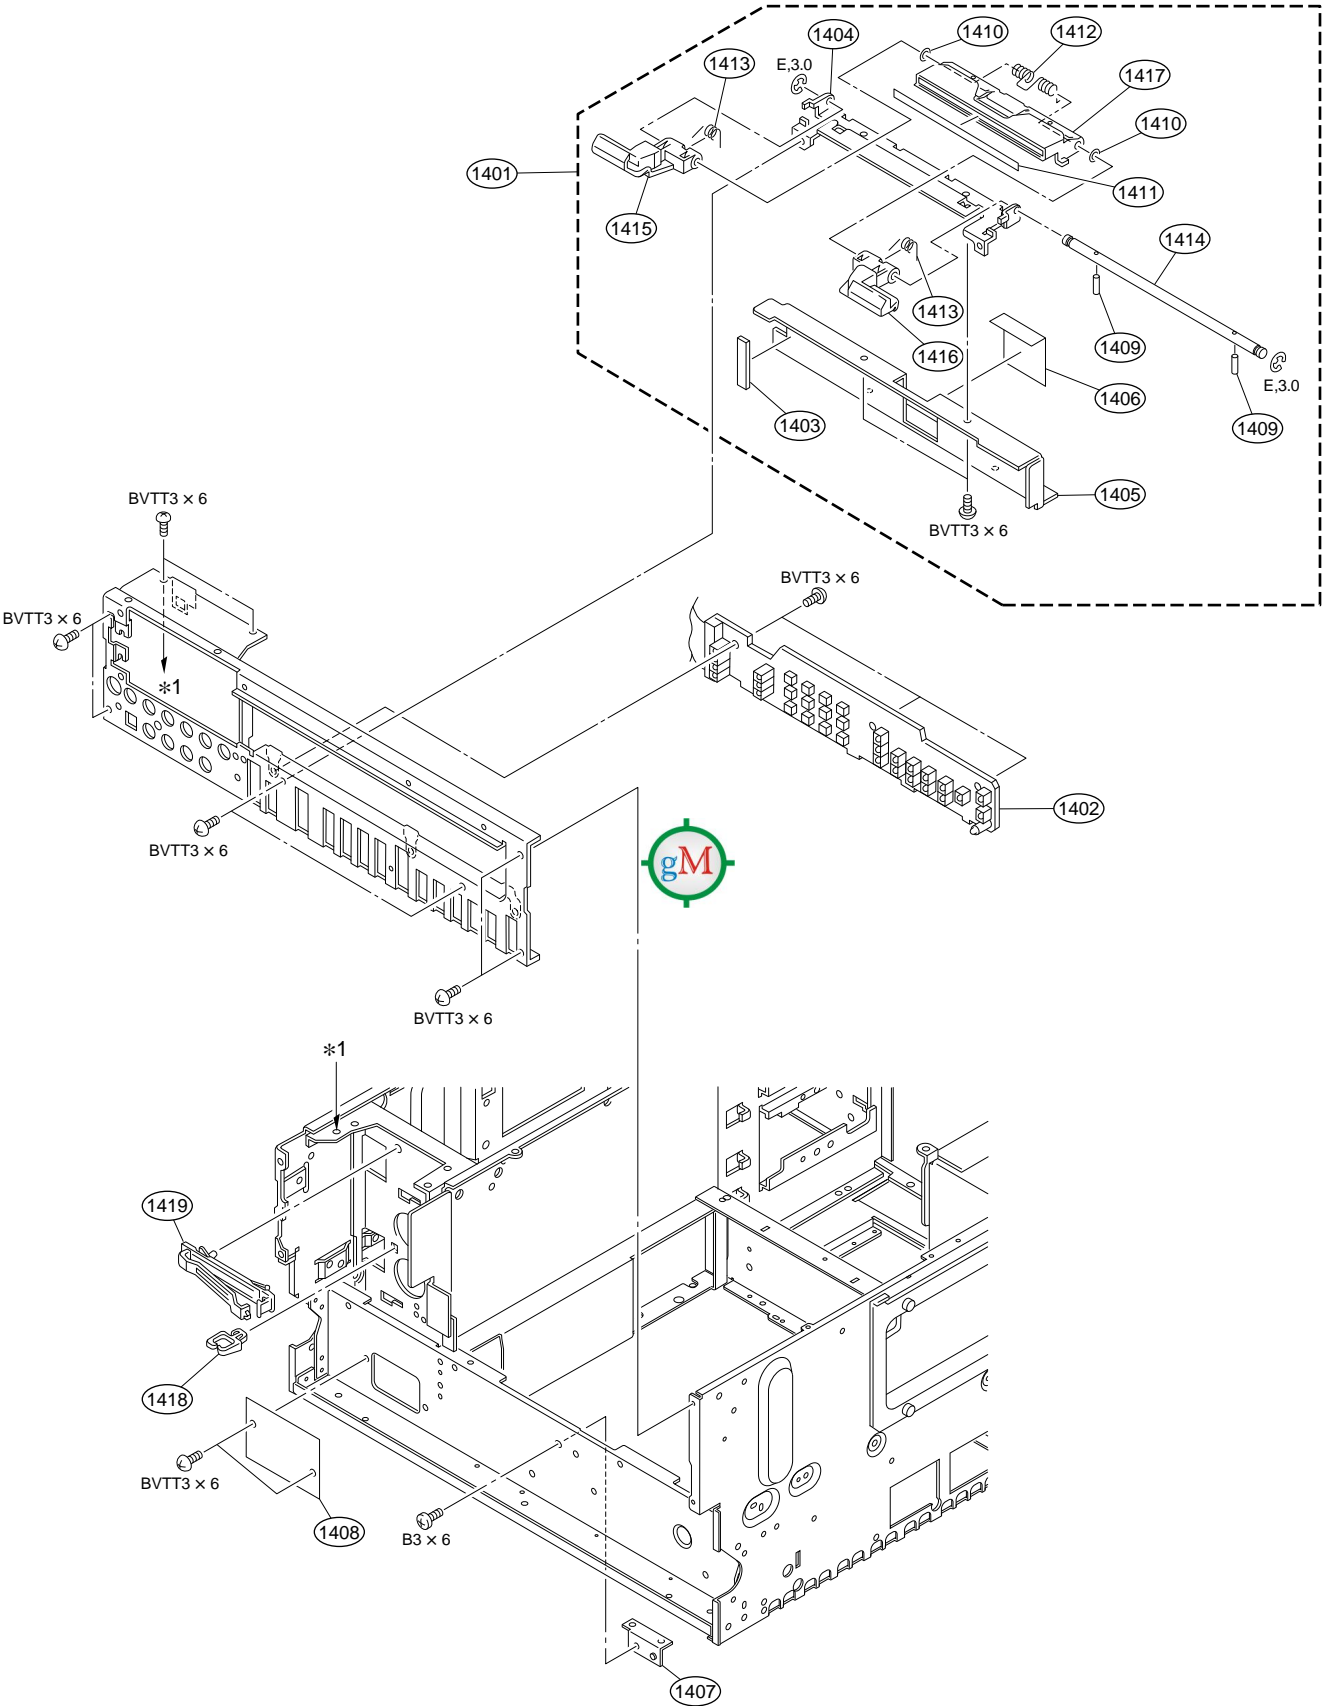


No.	Part No.	SP Description
1401	A-8278-847-A	o GUIDE ASSY, SC
1402	A-8319-293-A	o MOUNTED CIRCUIT BOARD, SWC-35
1403	3-180-747-01	o GUARD (S), AIR
1404	3-608-272-01	o SUPPORT (A), SC GUIDE
1405	3-615-768-01	o SUPPORT (B), SC GUIDE
1406	3-615-779-01	o COVER (SC)
1407	3-615-790-01	o BRACKET, CCM
1408	3-615-824-02	o LID (FRONT)
1409	3-677-193-00	o PIN, STOPPER
1410	3-701-441-21	s WASHER, POLY 4mm DIA., 0.50T
1411	3-717-614-01	o LABEL, C-LOCK OUT
1412	3-717-615-01	o SPRING
1413	3-717-616-01	o SPRING
1414	3-717-617-01	o SHAFT, SC GUIDE
1415	3-717-618-01	o GUIDE (LEFT), SC
1416	3-717-619-02	o GUIDE (RIGHT), SC
1417	3-717-620-01	o PLATE, OUT, C-LOCK
1418	4-314-320-00	o HOLDER, WIRE
1419	4-874-187-01	o CLIP, CABLE

Screws/Washer

Part No.	SP Description
7-624-106-04	s STOP RING 3.0, TYPE -E
7-682-547-09	s SCREW +B 3X6
7-685-871-01	s SCREW +BVTT 3X6 (S)

Lower Control Panel

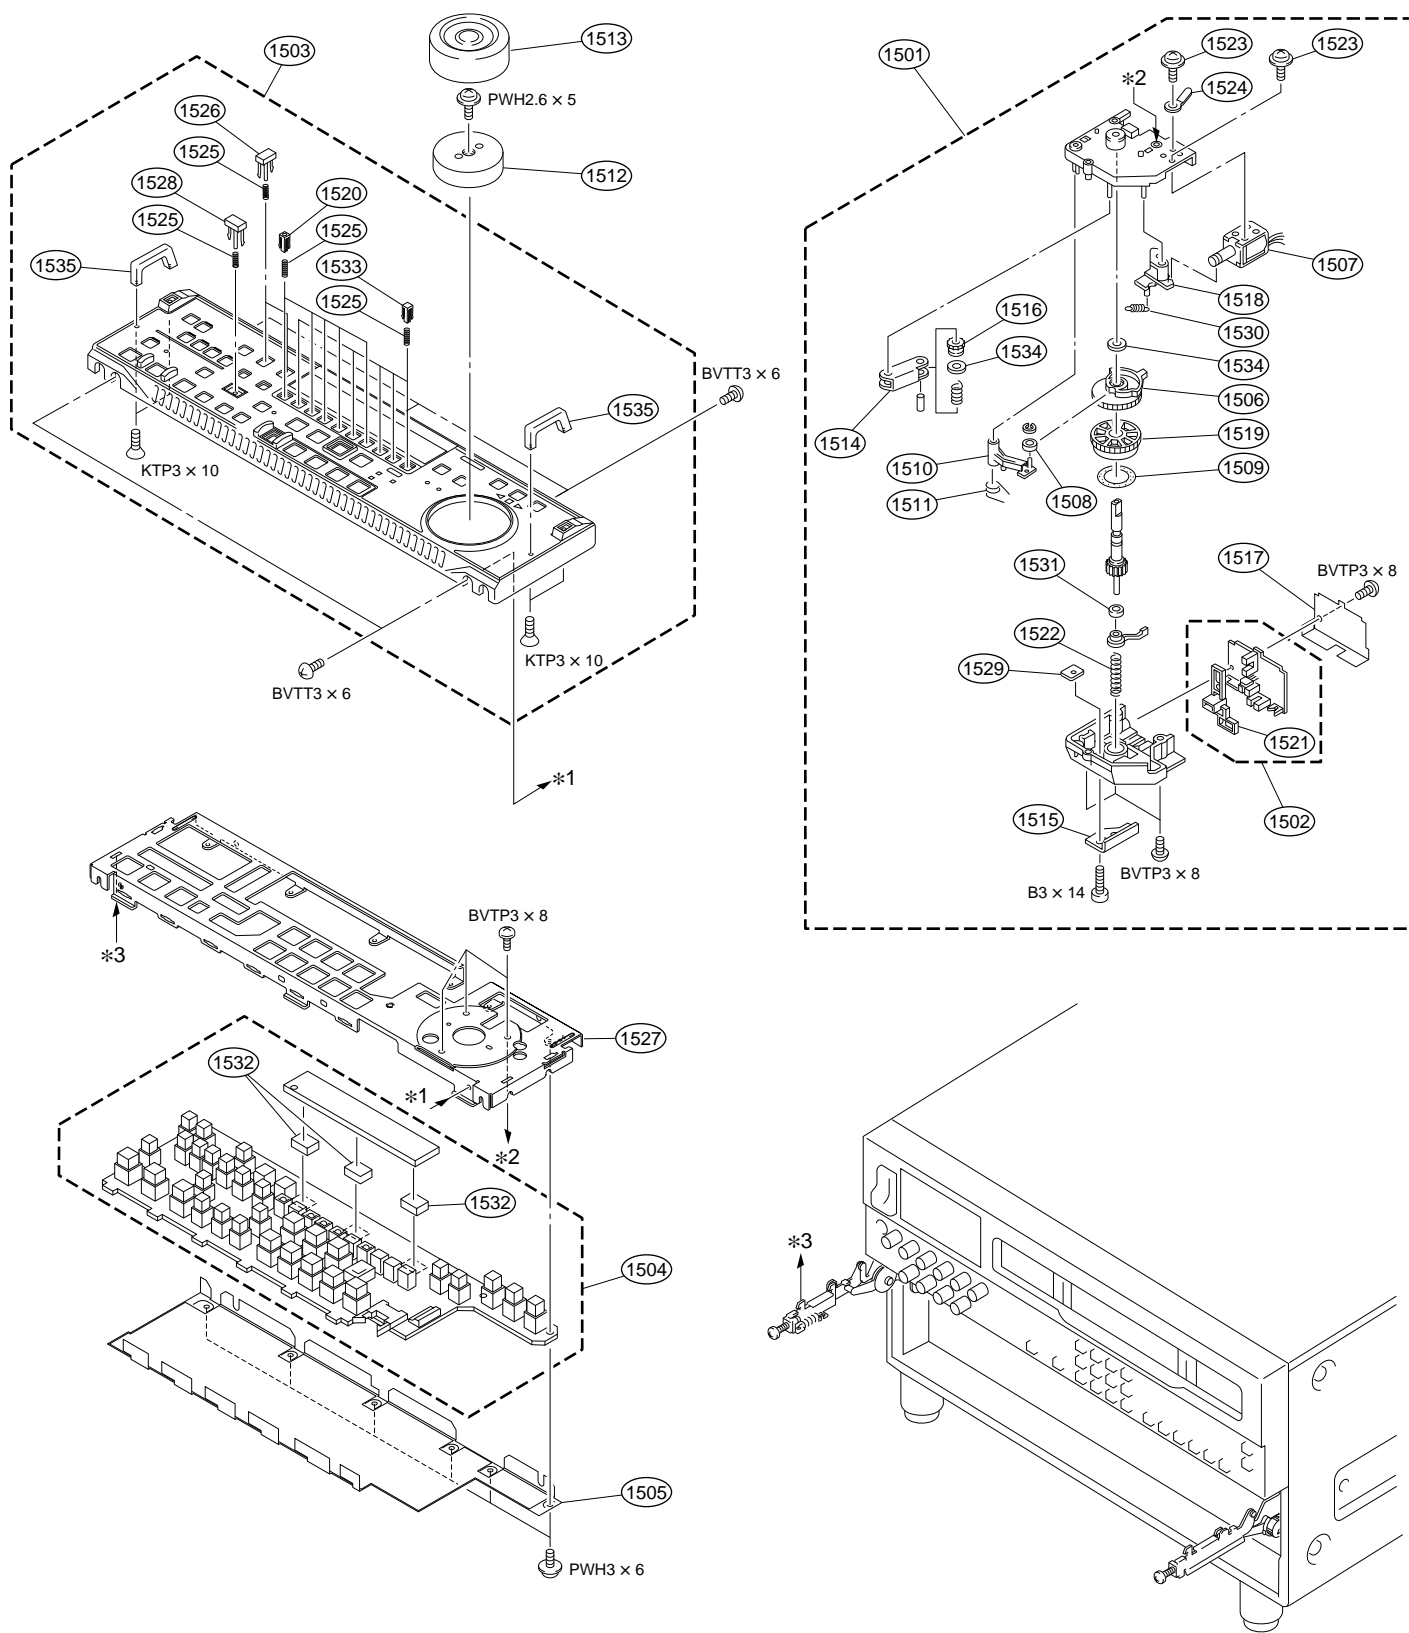


No.	Part No.	SP Description
1501	A-8273-999-E	s DIAL ASSY, SEARCH
1502	A-8276-585-B	o MOUNTED CIRCUIT BOARD, PTC-69
1503	A-8278-849-C	o PANEL ASSY, KEY
1504	A-8319-277-A	o MOUNTED CIRCUIT BOARD, KY-438
1505	X-3604-675-1	o PROTECTOR ASSY, KY
1506	X-3678-554-4	o CAM ASSY, SD
1507	1-454-606-11	s SOLENOID, PLUNGER
1508	2-124-691-01	s ROLLER
1509	2-124-695-01	o PLATE, CUSHION
1510	2-143-603-01	o ARM, RETURN
1511	2-143-613-01	s SPRING, TORSION
1512	3-180-632-01	o KNOB, DIAL
1513	3-180-633-04	s RUBBER, DIAL KNOB
1514	3-180-638-01	o ARM, JOINT GEAR
1515	3-180-639-01	o PLATE, MODE SELECTION
1516	3-180-640-02	o GEAR, JOINT
1517	3-180-648-03	o PROTECTOR, PTC
1518	3-180-649-02	o LINK, SOLENOID
1519	3-180-650-03	s FG-RING
1520	3-180-822-05	s KEY TOP 6X6, USE
1521	3-180-859-02	o HOLDER, SENSOR
1522	3-181-956-01	o SPRING, COMPRESSION
1523	3-200-534-01	s +PWH 2.6X4.5
1524	3-608-939-01	o PLATE, ELECTROSTATIC
1525	3-611-769-01	s SPRING, COMPRESSION
1526	3-615-786-02	s TOP, KEY 7X11
1527	3-615-809-01	o CHASSIS, KEY PANEL
1528	3-615-810-02	s TOP, KEY 9X16
1529	3-618-225-03	s NUT, PLATE
1530	3-645-189-11	s SPRING, TENSION
1531	3-676-322-00	s BEARING, THRUST
1532	3-696-768-01	o SPACER
1533	3-696-774-02	s TOP KEY 6X6
1534	3-701-443-21	s WASHER, POLY 5mm DIA., 0.50T
1535	3-717-425-31	o HANDLE

Screws

Part No.	SP Description
7-682-551-09	s SCREW +B 3X14
7-682-902-11	s SCREW +PWH 2.6X5
7-682-903-11	s SCREW +PWH 3X6
7-685-247-19	s SCREW +KTP 3X10 TYPE2 SLIT
7-685-646-79	s SCREW +BVTP 3X8 TYPE2 SLIT
7-685-871-09	s SCREW +BVTT 3X6 (S)


Sub Control Panel

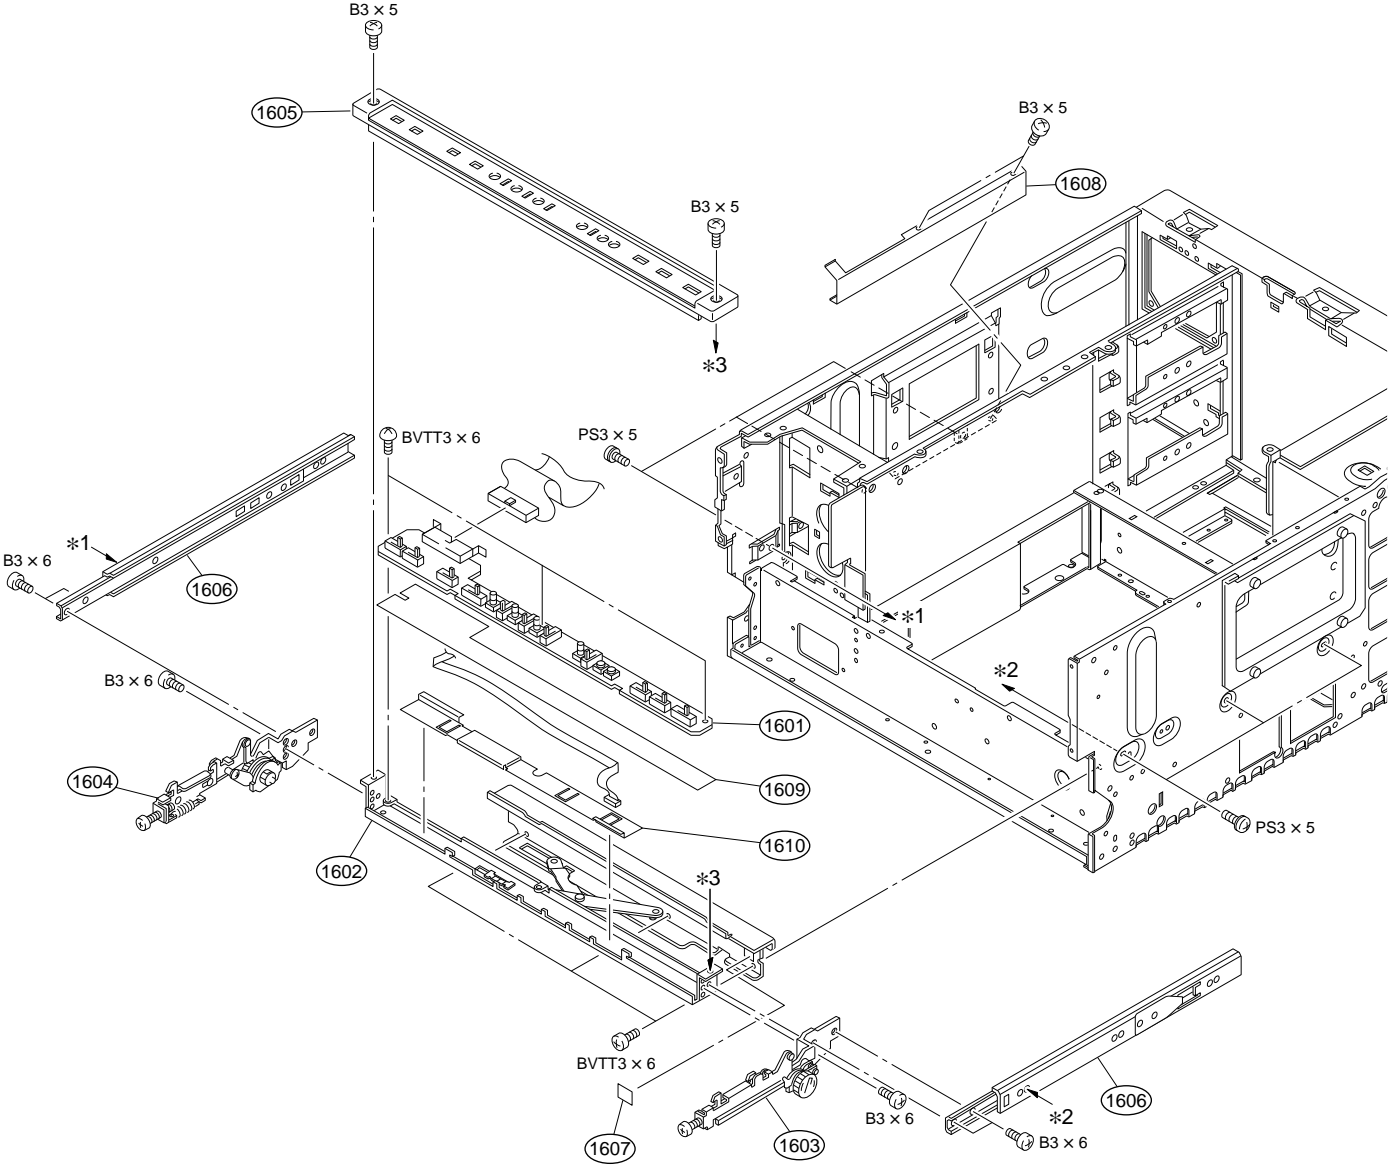

No.	Part No.	SP Description
1601	A-8323-240-A	o MOUNTED CIRCUIT BOARD, SWC-31M
1602	X-3167-022-3	o CHASSIS ASSY, SUB
1603	X-3167-065-3	o SLIDER (R) ASSY
1604	X-3167-066-3	o SLIDER (L) ASSY
1605	X-3605-577-1	o PANEL ASSY, SUB
1606	X-3717-253-1	o RAIL ASSY, SLIDE
1607	3-185-303-01	o SEAL, EJECT
1608	3-605-569-01	o PLATE (L), SHIELD (For DNW-75/75P(E))
1609	3-616-399-01	o COVER, SUB CONTROL
1610	3-697-871-02	o COVER (A), HARNESS

Screws

Part No.	SP Description
7-682-546-09	s SCREW +B 3X5
7-682-547-09	s SCREW +B 3X6
7-682-646-09	s SCREW +PS 3X5
7-685-871-01	s SCREW +BVTT 3X6 (S)

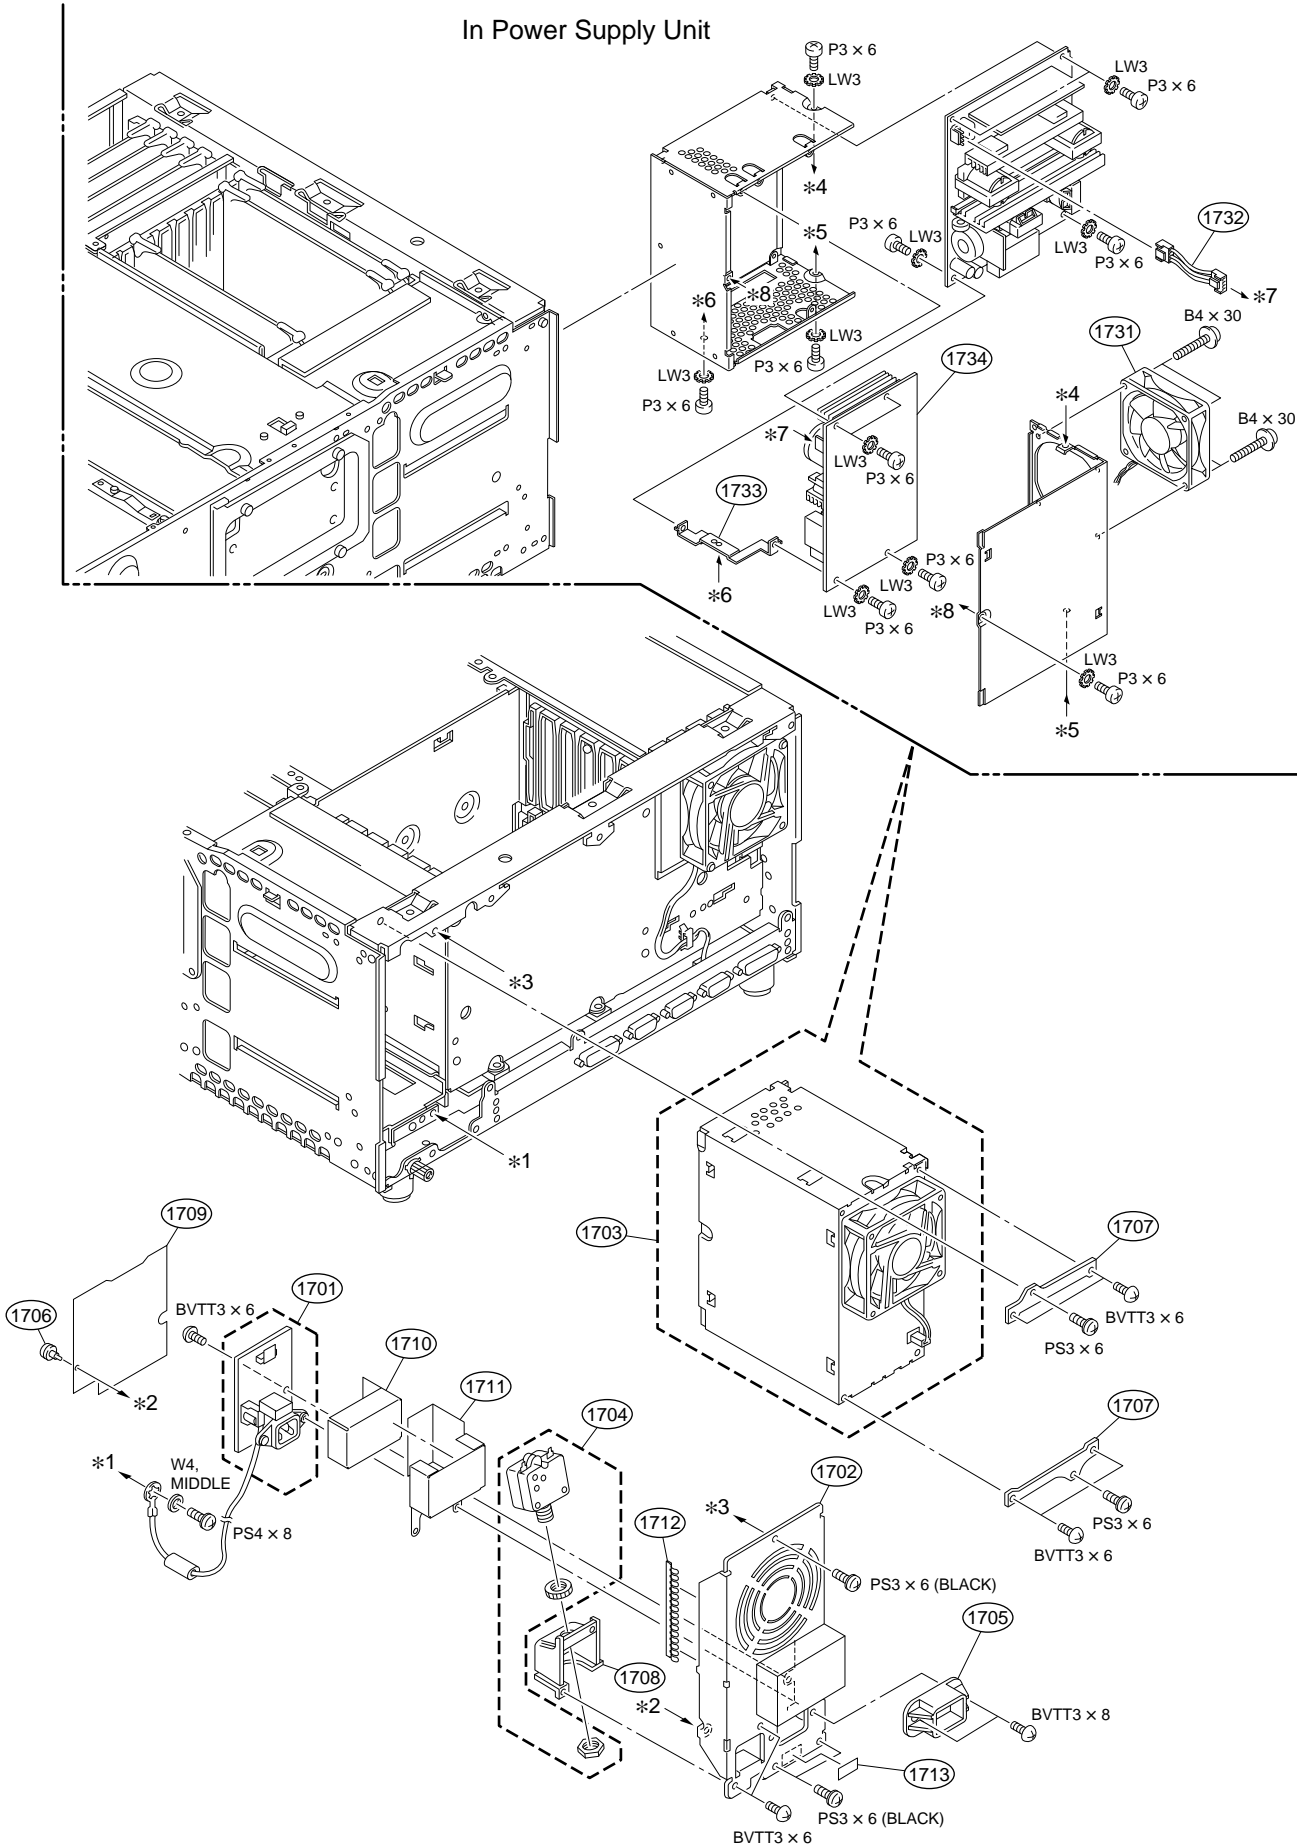


No.	Part No.	SP Description
1701	A-8319-242-A	o MOUNTED CIRCUIT BOARD, AC-169K
1702	X-3678-925-3	o PANEL ASSY, POWER
1703	△ 1-468-345-11	s REGULATOR, SWITCHING
1704	△ 1-533-307-11	s BREAKER, CIRCUIT
1705	2-990-241-02	s HOLDER (A), PLUG
1706	3-531-576-01	s RIVET
1707	3-605-572-01	o BRACKET, SW-REG
1708	3-608-198-01	o BRACKET, BREAKER
1709	3-616-326-01	o SHEET1, AC INSULATED
1710	3-616-327-01	o SHEET2, AC INSULATED
1711	3-616-328-01	o AC SHIELD
1712	3-616-369-01	o FINGER (15), SHIELD
1713	3-703-978-01	o LABEL (A), FIRE CAUTION (For DNW-75/75P(E))

In Power Supply Unit

No.	Part No.	SP Description
1731	1-698-785-41	s FAN, DC (80 SQUARE)
1732	9-884-370-11	o HARNESS 8254-WH-01
1733	9-980-712-01	o BRACKET, EARTH
1734	9-884-372-01	o MOUNTED CIRCUIT BOARD, MAIN 1

Screws/Washers

Part No.	SP Description
7-623-422-07	s LW 3, TYPE B
7-682-147-01	s SCREW +P 3X6
7-682-547-09	s SCREW +B 3X6
7-682-568-04	s SCREW +B 4X30
7-682-647-01	s SCREW +PS 3X6
7-682-647-09	s SCREW +PS 3X6 (BLACK)
7-685-871-01	s SCREW +BVTT 3X6 (S)
7-685-872-09	s SCREW +BVTT 3X8 (S)
7-688-004-11	o W 4, MIDDLE

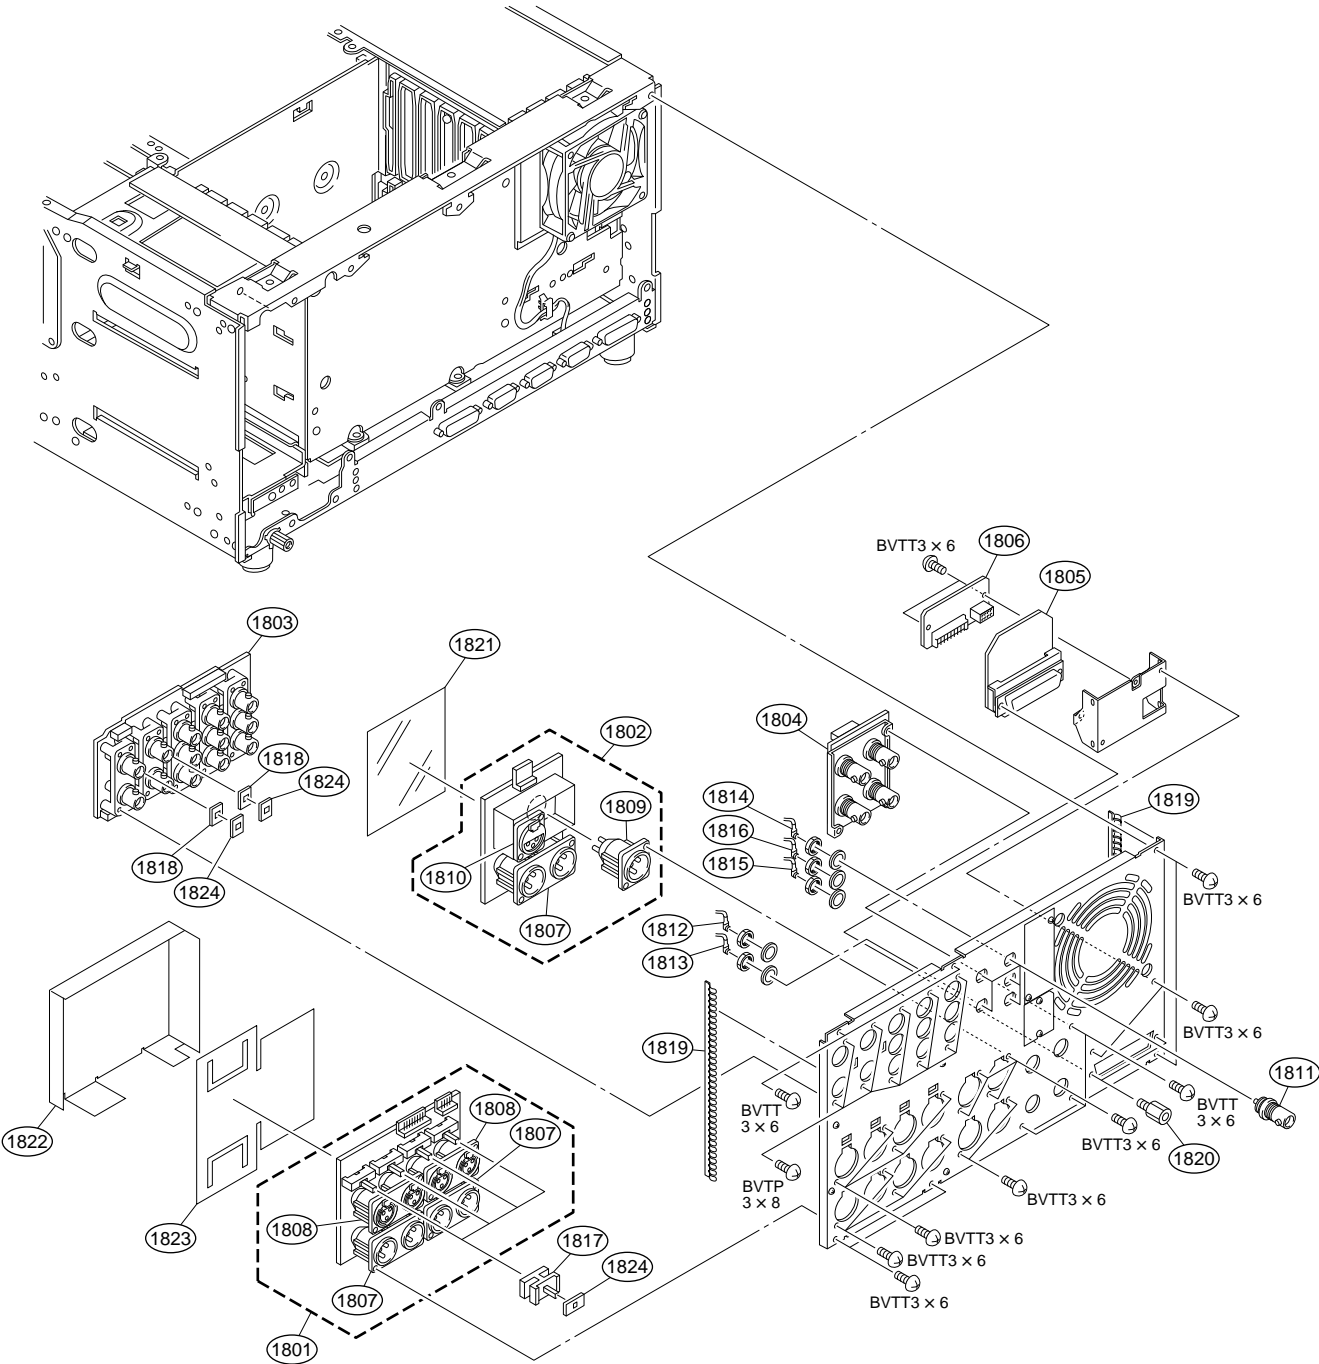


No.	Part No.	SP Description
1801	A-8319-247-A	o MOUNTED CIRCUIT BOARD, CP-278K (For DNW-75/75P(E))
	A-8319-249-A	o MOUNTED CIRCUIT BOARD, CP-278KJ (For DNW-75(J))
1802	A-8319-251-A	o MOUNTED CIRCUIT BOARD, CP-301K (For DNW-75(E))
	A-8319-253-A	o MOUNTED CIRCUIT BOARD, CP-301KJ (For DNW-75(J))
	A-8319-255-A	o MOUNTED CIRCUIT BOARD, CP-301KP (For DNW-75P(E))
1803	A-8319-257-A	o MOUNTED CIRCUIT BOARD, CP-334
1804	A-8319-259-A	o MOUNTED CIRCUIT BOARD, CP-335
1805	A-8319-282-A	o MOUNTED CIRCUIT BOARD, RM-130
1806	A-8319-284-A	o MOUNTED CIRCUIT BOARD, RM-179
1807	1-750-785-21	s CONNECTOR (XLR TYPE) 3P, MALE (For DNW-75/75P(E))
	1-750-786-21	s CONNECTOR (XLR TYPE) 3P, FEMALE (For DNW-75(J))
1808	1-750-786-21	s CONNECTOR (XLR TYPE) 3P, FEMALE (For DNW-75/75P(E))
	1-750-785-21	s CONNECTOR (XLR TYPE) 3P, MALE (For DNW-75(J))
1809	1-750-787-21	s CONNECTOR (XLR TYPE) 3P, MALE (For DNW-75/75P(E))
	1-750-788-21	s CONNECTOR (XLR TYPE) 3P, FEMALE (For DNW-75(J))
1810	1-750-788-21	s CONNECTOR (XLR TYPE) 3P, FEMALE (For DNW-75/75P(E))
	1-750-787-21	s CONNECTOR (XLR TYPE) 3P, MALE (For DNW-75(J))
1811	1-784-240-11	s CONVERTER, COAXIAL CONNECTOR
1812	1-790-307-11	o CABLE ASSEMBLY, COAXIAL (RED)
1813	1-790-308-11	o CABLE ASSEMBLY, COAXIAL (YELLOW)
1814	1-790-309-11	o CABLE ASSEMBLY, COAXIAL (ORANGE)
1815	1-790-313-11	o CABLE ASSEMBLY, COAXIAL (BLUE)
1816	1-790-314-11	o CABLE ASSEMBLY, COAXIAL (GREEN)
1817	3-171-450-01	o ADAPTOR, SW
1818	3-173-384-01	o SPACER, ORNAMENTAL PLATE
1819	3-608-205-01	o FINGER (A), SHIELD
1820	3-673-910-31	s SCREW, CONNECTOR
1821	3-696-791-01	o INSULATOR (B), CP
1822	3-696-796-02	o PLATE (C), CP SHIELD
1823	3-697-191-02	o INSULATOR (A), CP
1824	3-717-394-03	o PLATE (SMALL), ORNAMENTAL, SW

Screws

Part No.	SP Description
7-685-646-79	s SCREW +BVTP 3X8 TYPE2 SLIT
7-685-871-01	s SCREW +BVTT 3X6 (S)

MD Plate and Cassette Compartment Bracket

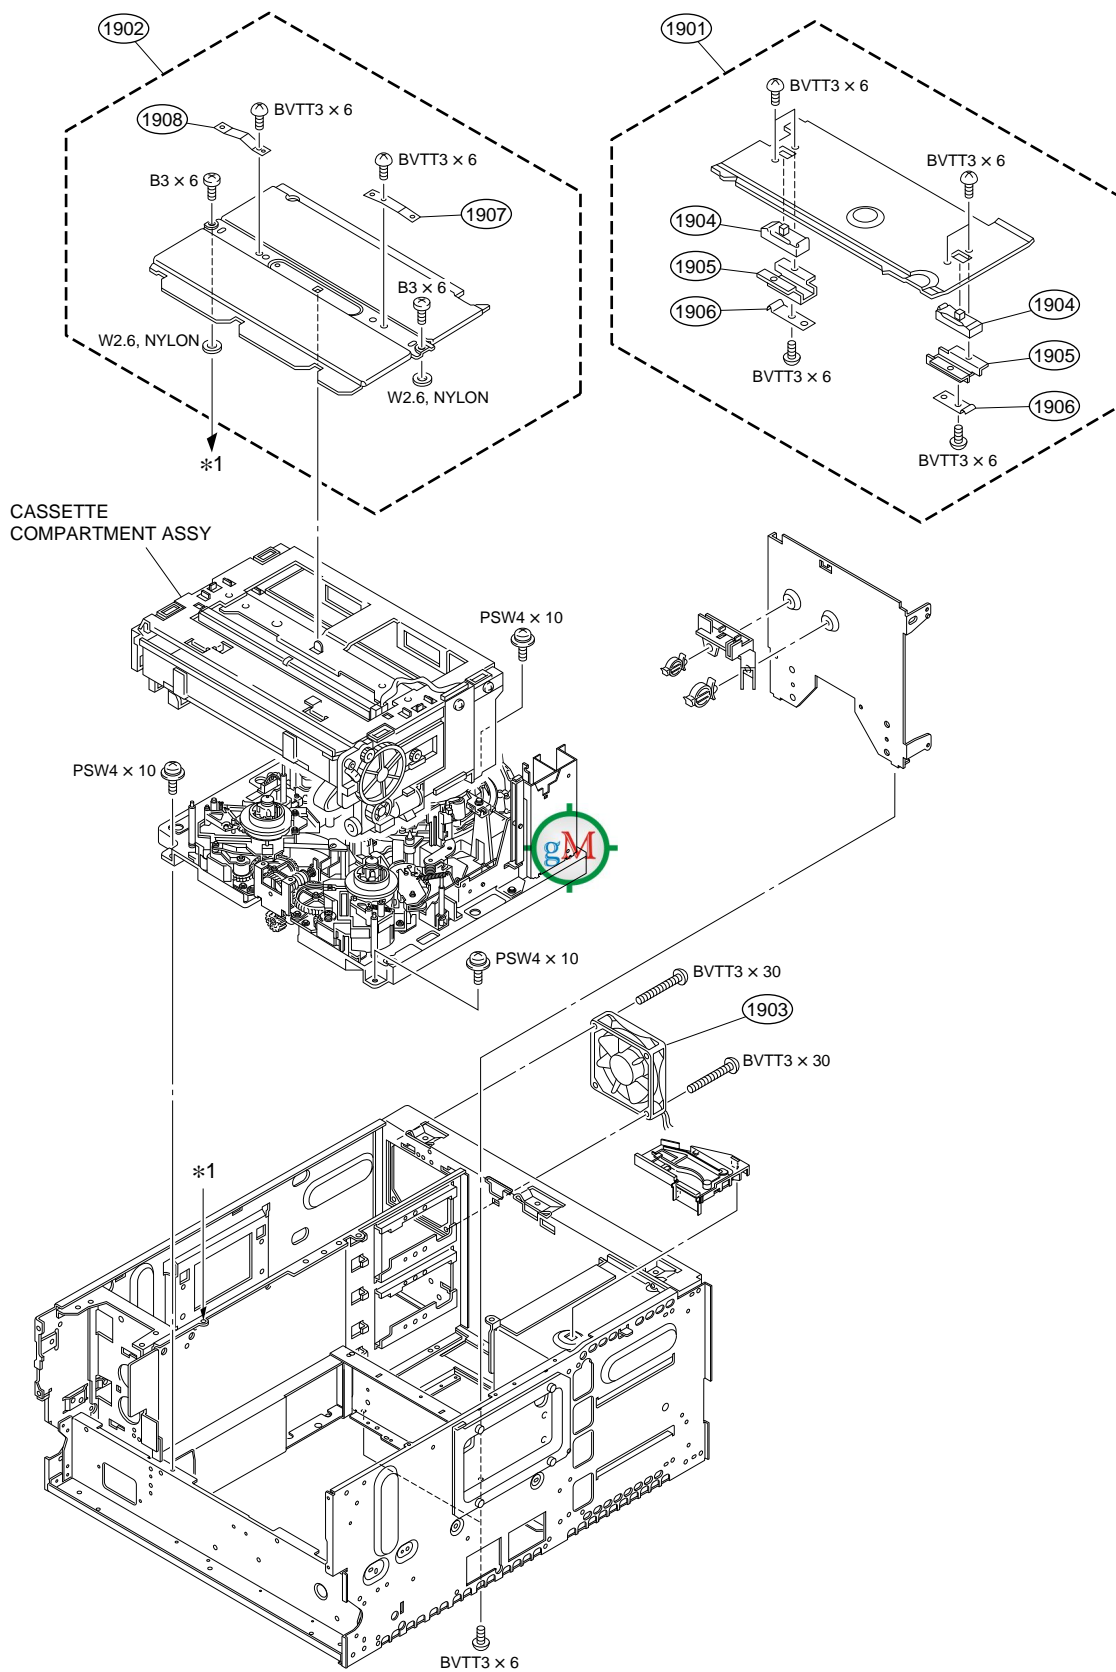


No.	Part No.	SP Description
1901	A-8278-845-A	o PLATE (MD) ASSY
1902	A-8278-846-A	s BRACKET ASSY
1903	1-763-170-11	s DC FAN (92 SQUARE)
1904	3-180-751-01	o MD, SLIDER
1905	3-180-752-01	o BRACKET, SLIDER
1906	3-180-753-03	o MD, PLATE SPRING
1907	3-182-786-01	o SPRING, CASSETTE COMPARTMENT
1908	3-717-306-01	o SPRING

Screws/Washer

Part No.	SP Description
7-623-923-11	s WASHER 2.6, NYLON
7-682-547-09	s SCREW +B 3X6
7-682-962-01	s SCREW +PSW 4X10
7-685-871-01	s SCREW +BVTT 3X6 (S)
7-685-879-09	s SCREW +BVTT 3X30 (S)

Fan Motor and Motherboard

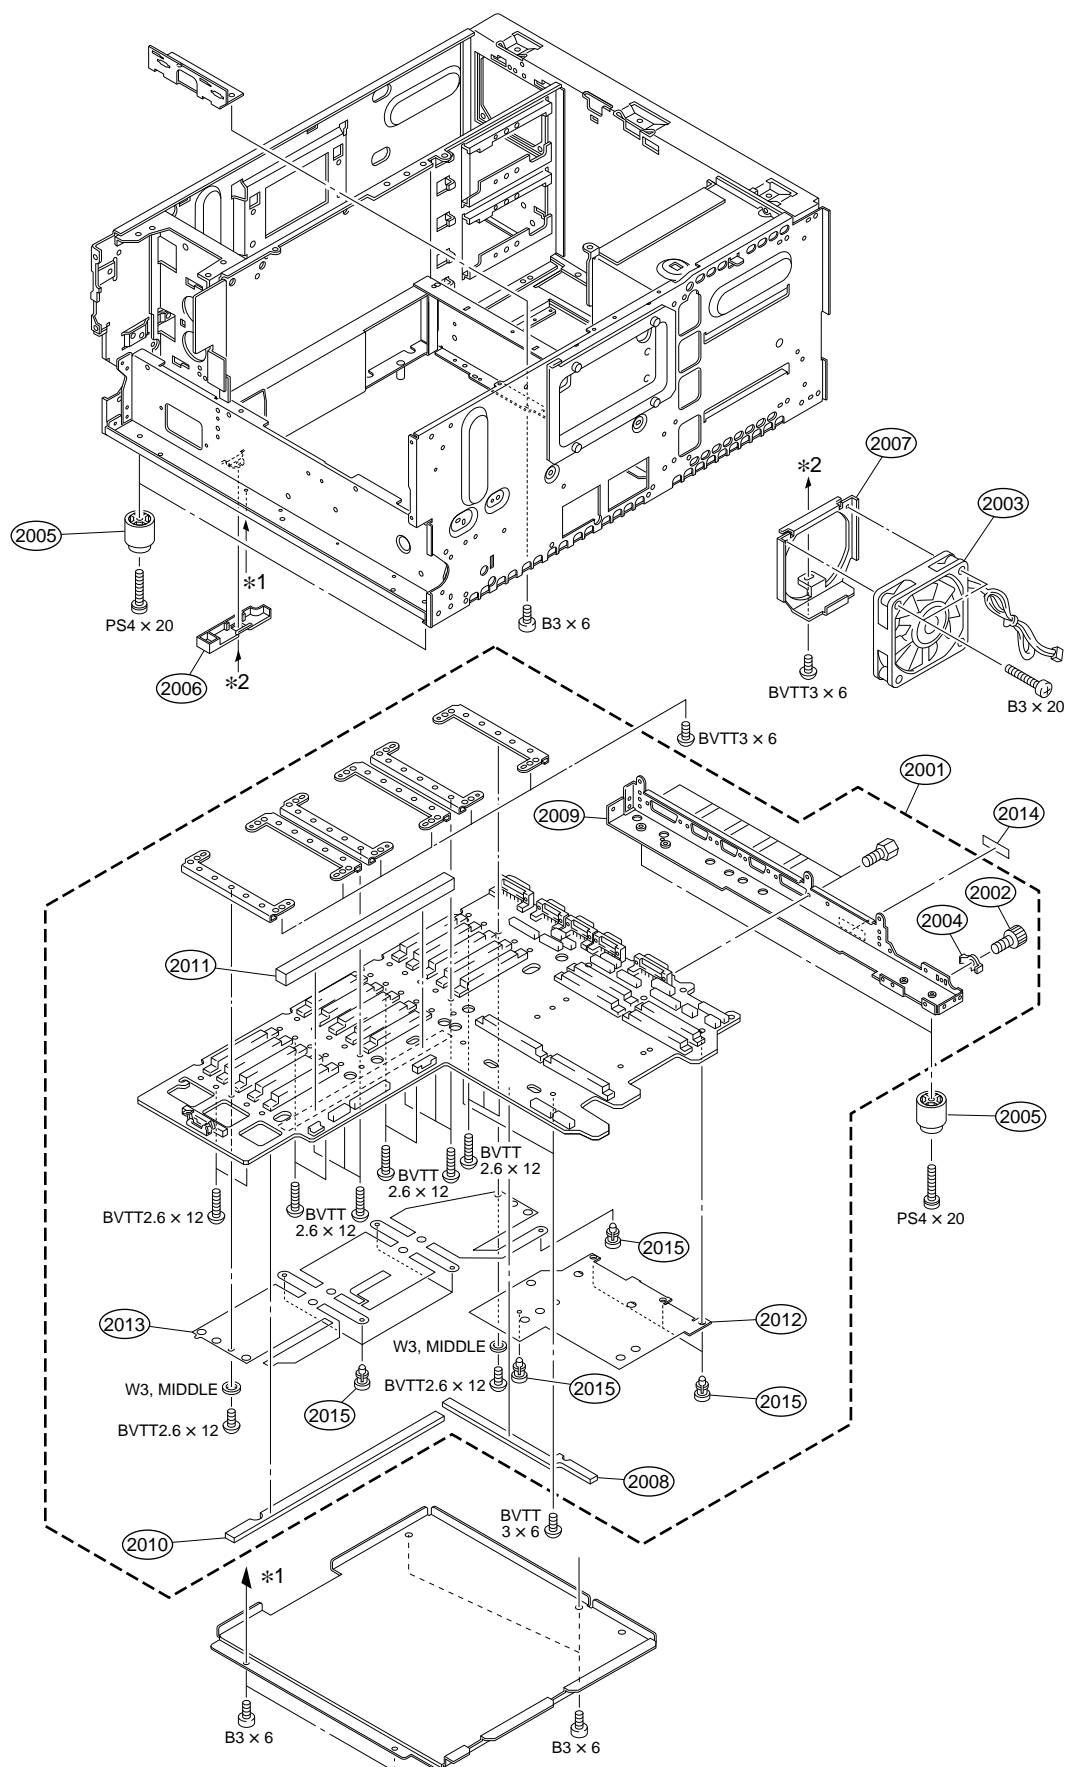


No.	Part No.	SP Description
2001	A-8323-294-A	o MB ASSY
2002	X-2068-004-0	s TERMINAL ASSY
2003	1-698-786-11	s FAN, DC (60 SQUARE)
2004	2-068-008-00	s WASHER
2005	3-642-656-01	s FOOT
2006	3-615-766-02	o COVER (M2), AIR
2007	3-615-780-03	o FAN BRACKET M
2008	3-615-813-01	o SPEACER (D)
2009	3-615-816-02	o PANEL, D SUB
2010	3-615-817-01	o SPACER (B)
2011	3-615-818-01	o SPACER (A)
2012	3-615-826-02	o SHEET (MB1)
2013	3-615-827-03	o SHEET (MB2)
2014	3-703-845-01	o LABEL (N) (U/C), MAIN CAUTION (For DNW-75/75P(E))
2015	4-812-134-11	s RIVET (DIA. 3.5), NYLON

Screws/Washer

Part No.	SP Description
7-682-547-09	s SCREW +B 3X6
7-682-553-09	s SCREW +B 3X20
7-682-666-09	s SCREW +PS 4X20
7-685-865-09	s SCREW +BVT 2.6X12
7-685-871-01	s SCREW +BVT 3X6 (S)
7-688-003-11	s W 3, MIDDLE

Plug-in Boards (L)

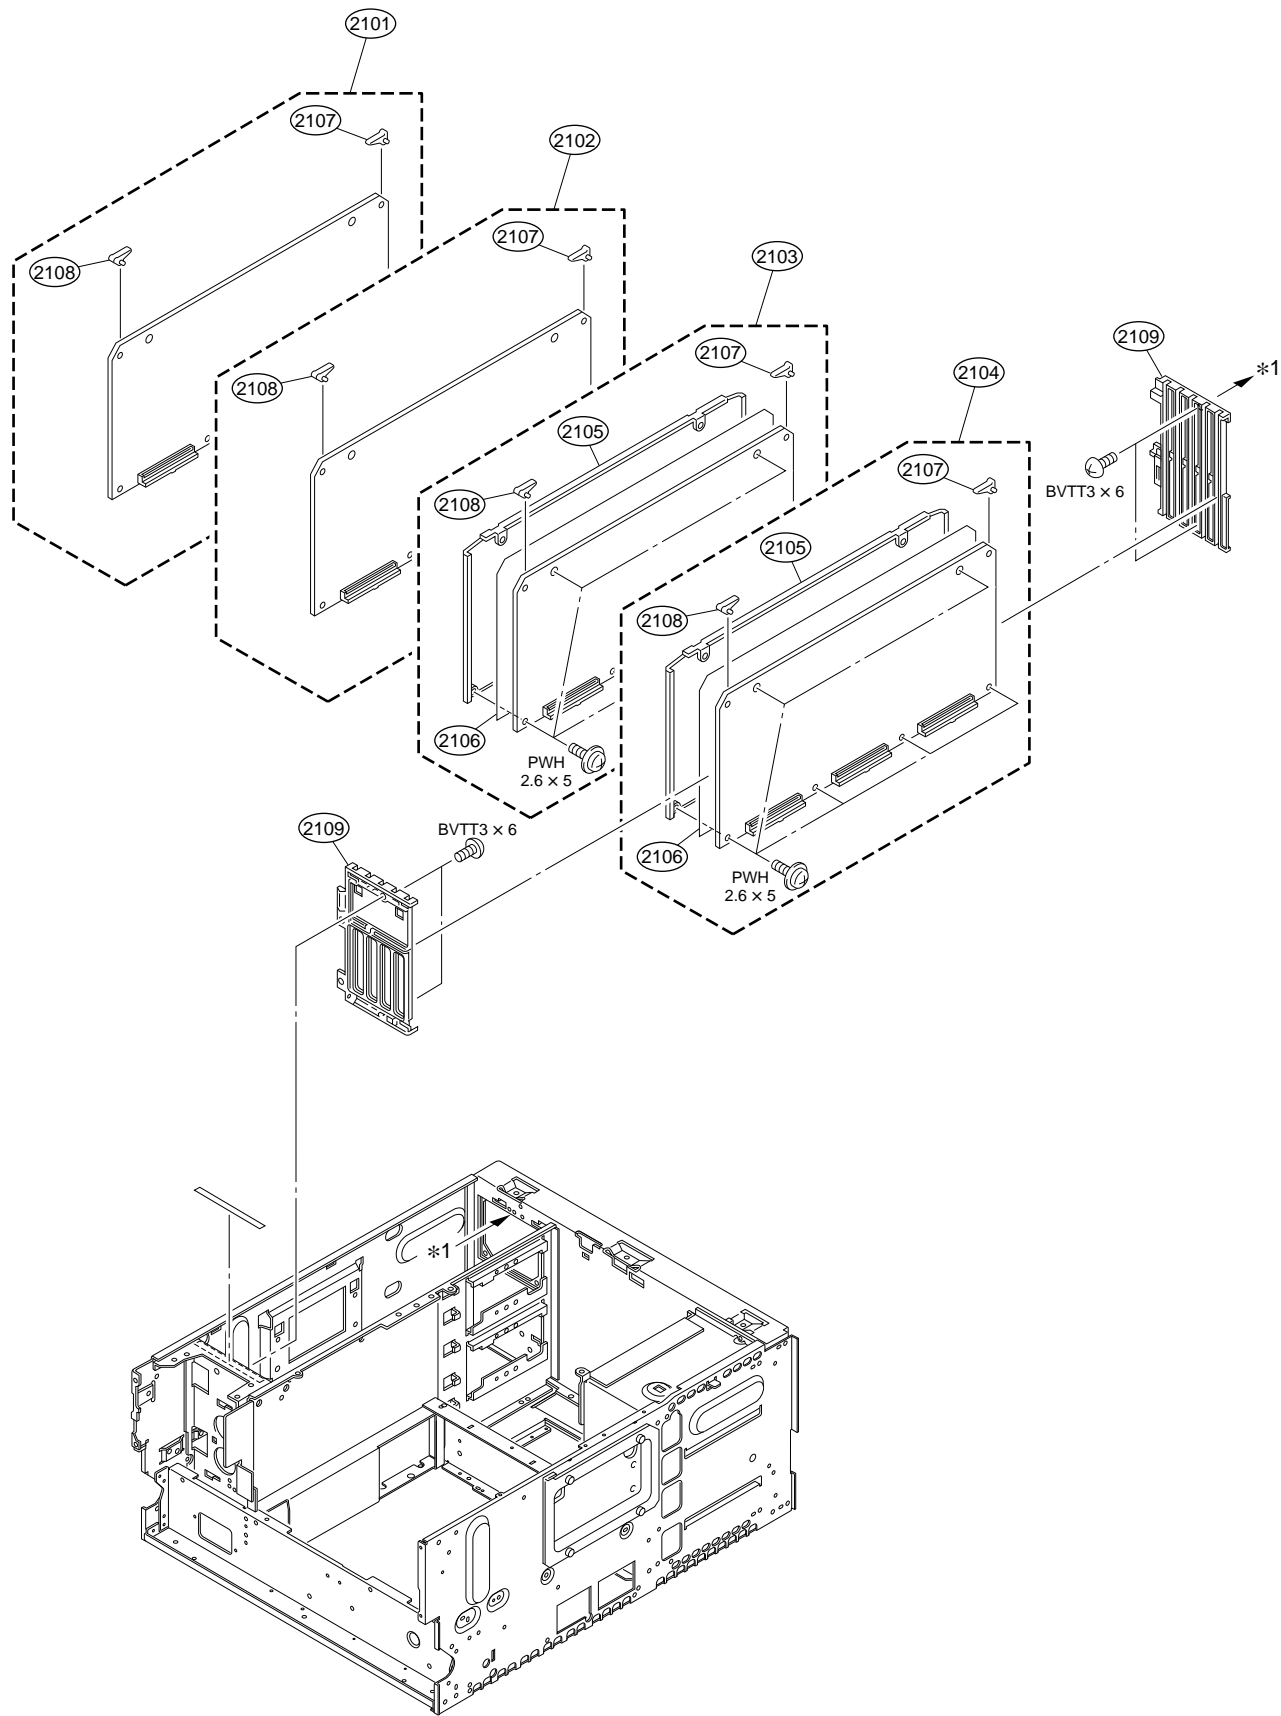


No.	Part No.	SP Description
2101	A-8319-263-A	o MOUNTED CIRCUIT BOARD, DPR-118
2102	A-8319-301-A	o MOUNTED CIRCUIT BOARD, VPR-47 (For DNW-75)
	A-8319-303-A	o MOUNTED CIRCUIT BOARD, VPR-47P (For DNW-75P)
2103	A-8323-234-A	o MOUNTED CIRCUIT BOARD, APR-40E
2104	A-8323-242-A	o MOUNTED CIRCUIT BOARD, SS-83E
2105	3-171-453-03	o PLATE (L), SHIELD, CARD
2106	3-171-454-02	o SHEET (L), CARD
2107	3-179-084-01	s LEVER (R), PC BOARD
2108	3-179-085-01	s LEVER (L), PC BOARD
2109	3-180-646-02	o GUIDE (L), PC BOARD

Screws

Part No.	SP Description
7-682-902-11	s SCREW +PWH 2.6X5
7-685-871-01	s SCREW +BVTT 3X6 (S)

Plug-in Boards (S)

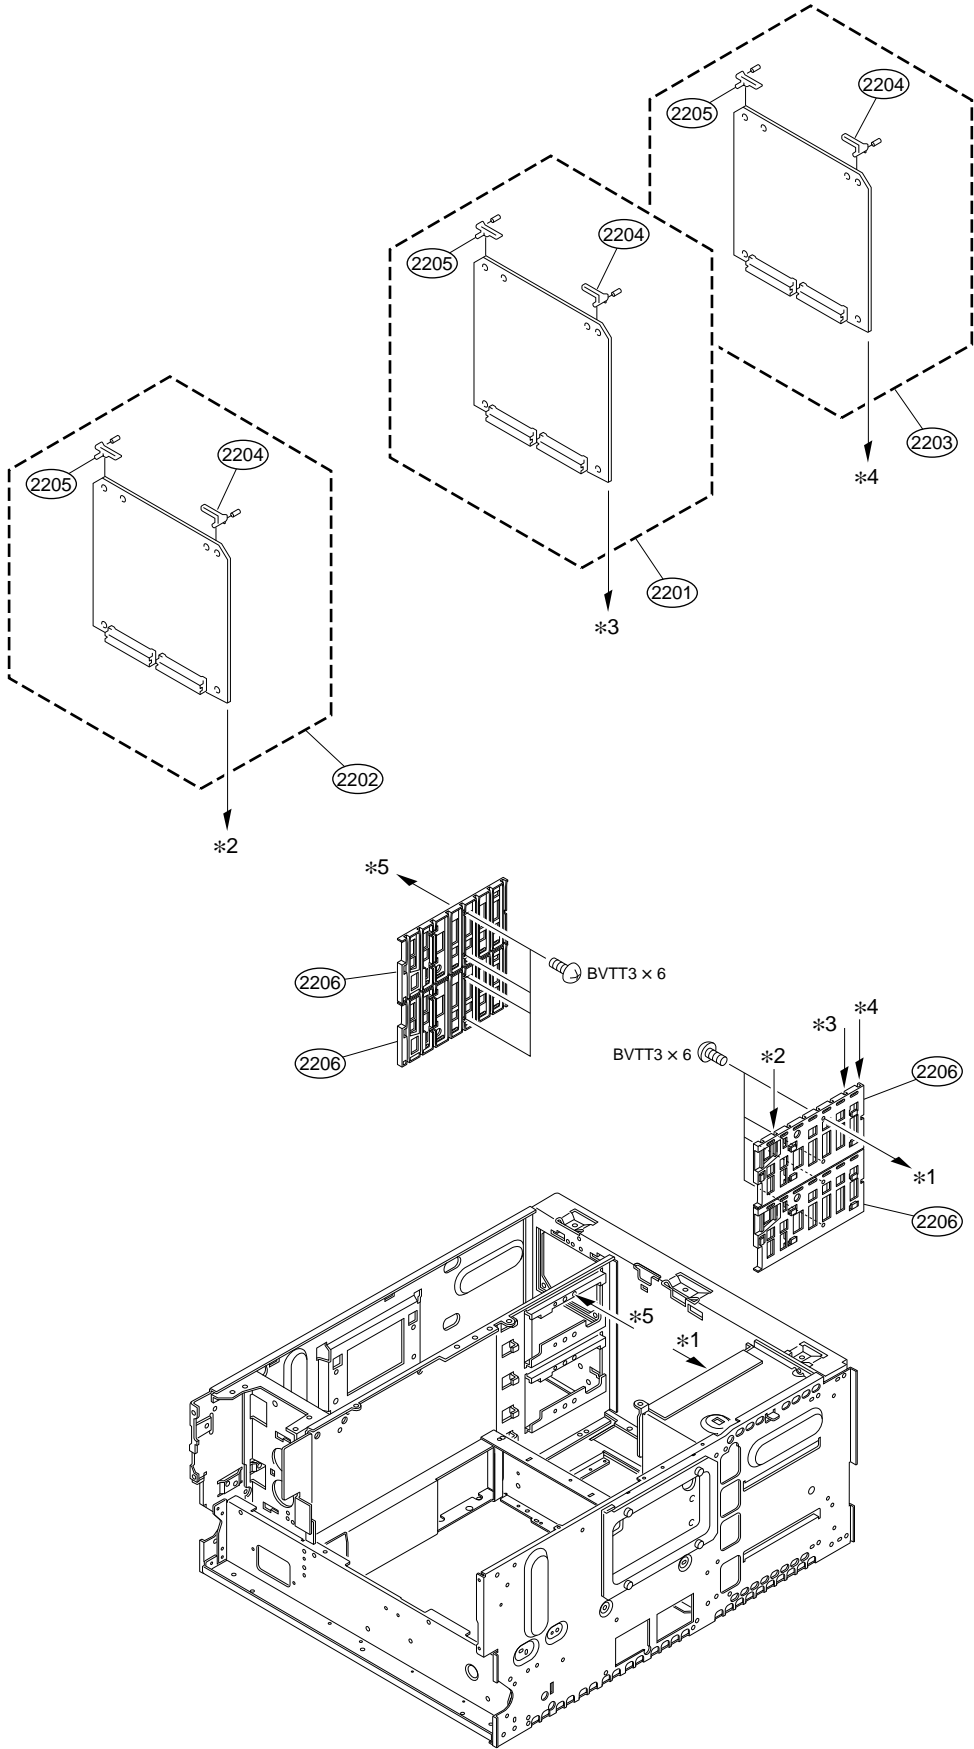

No.	Part No.	SP Description
2201	A-8319-261-A	o MOUNTED CIRCUIT BOARD, DEC-110
2202	A-8319-273-A	o MOUNTED CIRCUIT BOARD, EQ-75
2203	A-8319-286-A	o MOUNTED CIRCUIT BOARD, SDI-41
2204	3-179-084-01	s LEVER (R), PC BOARD
2205	3-179-085-01	s LEVER (L), PC BOARD
2206	3-696-886-02	o GUIDE (S), PC BOARD

Screw

Part No.	SP Description
7-685-871-01	s SCREW +BVTT 3X6 (S)

Section 3

Electrical Parts List

3-1. Frame List

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8277-462-A	s	RING (3) ASSEMBLY (RP), BRUSH SLIP
1pc	△ 1-468-345-11	s	SWITCHING REGULATOR
2pcs	1-543-316-31	s	HEAD, SENSING "TAPE TOP/END SENSOR"
CB1001	△ 1-533-307-11	s	BREAKER, CIRCUIT 5A 250V
FAN1	1-698-785-41	s	FAN, DC (80 SQUARE) "POWER SUPPLY"
FAN2	1-763-170-11	s	FAN, DC (92 SQUARE) "REAR"
FAN3	1-698-786-11	s	FAN, DC (60 SQUARE) "MD"
FL001	1-543-793-11	s	FILTER, CLAMP
FL002	1-543-793-11	s	FILTER, CLAMP
FL1003	1-543-793-11	s	FILTER, CLAMP
FL1004	1-543-793-11	s	FILTER, CLAMP
FL1005	1-543-793-11	s	FILTER, CLAMP (For E only)
FL1006	1-543-793-11	s	FILTER, CLAMP (For E only)
FL1007	1-500-082-11	s	CLAMP, SLEEVE FERRITE (For E only)
FL1008	1-500-082-11	s	CLAMP, SLEEVE FERRITE (For E only)
FL1009	1-500-082-11	s	CLAMP, SLEEVE FERRITE (For E only)
FL1010	1-500-082-11	s	CLAMP, SLEEVE FERRITE (For E only)
FL1011	1-500-082-11	s	CLAMP, SLEEVE FERRITE (For E only)
H001	8-825-778-23	s	HEAD, AUDIO EPS244-2103G
H002	8-825-554-84	s	HEAD, CTL PS244-21B
H003	8-825-770-74	s	HEAD, FE EF291-21
LM001	1-517-185-42	o	INDICATOR MODULE, FLUORESCENT "LEVEL METERS"
M002	1-698-152-11	s	MOTOR, DC (SVD-1449) "REEL SHIFT MOTOR"
M003	1-698-152-11	s	MOTOR, DC (SVD-1449) "THREADING MOTOR"
M004	1-698-152-11	s	MOTOR, DC (SVD-1449) "CASSETTE COMPARTMENT MOTOR"
M007	1-698-179-12	s	MOTOR, DC "CAPSTAN"
PM001	1-454-607-11	s	SOLENOID "CLEANING ROLLER"
PM002	1-454-338-00	s	SOLENOID "PINCH ROLLER"
PM003	1-454-417-41	s	SOLENOID "S-BRAKE"
PM004	1-454-417-41	s	SOLENOID "T-BRAKE"
PM005	1-454-606-11	s	SOLENOID "DIAL"
S001	△ 1-762-953-11	s	SWITCH, POWER

3-2. Cable/Harness List

部品番号が記載されていないハーネスは、サービス部品として登録されていません。
これらは、リストに展開されているコンポーネント部品で補修してください。

Harnesses with no part number are not registered as spare parts.
In need of repair, get components shown in the list and repair using them.

Ref. No. or Q'ty	Part No.	SP	Description
HN101	- - -		(TO CN926/RM-181 BOARD "T-REEL")
1pc	1-562-149-11	o	HOUSING, 4P
4pcs	1-564-026-00	s	CONTACT, FEMALE, AWG26-30 (TO SE-344 BOARD "T")
HN102	- - -		(TO CN926/RM-181 BOARD "S-REEL")
1pc	1-562-149-11	o	HOUSING, 4P
4pcs	1-564-026-00	s	CONTACT, FEMALE, AWG26-30 (TO SE-344 BOARD "S")
HN103	1-665-836-11	s	FLEXIBLE CIRCUIT BOARD, CL-41 (TO CN934/PC-70 BOARD) (TO CN933/CL-29 BOARD)
HN104	1-948-962-12	o	HARNESS (CC LAMP) (TO CN932/LP-81 BOARD) (TO CN932/CL-29 BOARD)
HN105	- - -		(TO CN935/CL-29 BOARD)
1pc	1-569-195-11	o	HOUSING, 2P
2pcs	1-569-193-11	o	CONTACT, FEMALE, AWG24-30 (TO CASSETTE COMPARTMENT MOTOR)
HN106	1-956-187-11	o	HARNESS, SUB (T TEN) (TO CN1/TR-79 BOARD) (TO CN11/MS-58 BOARD)
HN107	1-951-929-11	o	HARNESS, SUB (SFT MOTOR) (TO CN217/CCM-15 BOARD "R") (TO CN20/MS-58 BOARD)
HN108	1-951-979-11	o	HARNESS, SUB (REEL POS) (TO CN1/PTC-71 BOARD) (TO CN21/MS-58 BOARD)
HN109	1-661-362-11	o	FLEXIBLE CIRCUIT BOARD, FL-239 (TO CN923/RM-181 BOARD "T-REEL") (TO CN22/MS-58 BOARD)
HN110	1-661-362-11	o	FLEXIBLE CIRCUIT BOARD, FL-239 (TO CN923/RM-181 BOARD "S-REEL") (TO CN23/M-58 BOARD)
HN111	1-956-188-11	o	HARNESS, SUB (PINCH) (TO CN854/PD-35 BOARD) (TO CN26/MS-58 BOARD)
HN112	1-956-184-11	o	HARNESS, SUB (CASS) (TO CN930/CL-29 BOARD) (TO CN14/MS-58 BOARD)
HN114	1-956-191-12	o	HARNESS, SUB (DEW) (TO CN15/MS-58 BOARD) (TO CN1/SE-461 BOARD)
HN115	1-956-192-13	o	HARNESS, SUB (ID) (TO CN116/MS-58 BOARD) (TO CN1/PTC-59 BOARD)

(Cable/Harness List)

Ref. No. or Q'ty	Part No.	SP Description
HN116	- - -	(TO CN17/MS-58 BOARD)
1pc	1-569-196-11	o HOUSING, 3P
1pc	1-569-191-11	o CONTACT, FEMALE, AWG22-26
2pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
		(TO CTL HEAD)
1pc	1-569-195-11	o HOUSING, 2P
2pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
HN117	1-956-185-11	o HARNESS, SUB (CAP)
		(TO CN18/MS-58 BOARD)
		(TO CAPSTAN MOTOR)
HN120	1-956-193-11	o HARNESS, SUB (TOP)
		(TO CN13/MS-58 BOARD)
		(TO TAPE TOP SENSOR)
HN121	1-956-190-11	o HARNESS, SUB (END)
		(TO CN28/MS-58 BOARD)
		(TO TAPE END SENSOR)
HN122	1-956-189-11	o HARNESS, SUB (TH FG)
		(TO CN27/MS-58 BOARD)
		(TO CN904/PTC-54 BOARD)
HN124	- - -	(TO CN111/DR-315 BOARD)
1pc	1-580-587-11	o HOUSING, LY 22P
6pcs	1-573-176-11	o CONTACT, FEMALE, AWG22-26
16pcs	1-580-599-11	o CONTACT, LY, FEMALE, AWG22-30
		(TO CN612/DRUM ASSEMBLY)
1pc	1-580-587-11	o HOUSING, LY 22P
6pcs	1-573-176-11	o CONTACT, FEMALE, AWG22-26
16pcs	1-580-599-11	o CONTACT, LY, FEMALE, AWG22-30
HN125	1-956-194-12	o HARNESS, SUB (TH MTR)
		(TO CN920/CCM-15 BOARD "T")
		(TO CN112/DR-315 BOARD)
HN126	- - -	(TO CN253/POWER SUPPLY UNIT)
1pc	1-562-211-11	s HOUSING, VH 3P
3pcs	1-562-210-11	o CONTACT, FEMALE, AWG18-22
		(TO CN101/DR-315 BOARD)
1pc	1-562-211-11	s HOUSING, VH 3P
3pcs	1-562-210-11	o CONTACT, FEMALE, AWG18-22
HN128	- - -	(TO CN611/DRUM ASSEMBLY)
1pc	1-580-583-11	o HOUSING, LY 14P
1pc	1-573-176-11	o CONTACT, FEMALE, AWG22-26
2pcs	1-580-599-11	o CONTACT, LY, FEMALE, AWG22-30
		(TO CN1600/EQ-75 BOARD)
1pc	1-569-197-41	o HOUSING, 4P
1pc	1-569-192-11	o CONTACT, FEMALE, AWG22-26
2pcs	1-569-194-11	o CONTACT, FEMALE, AWG24-30

(Cable/Harness List)

Ref. No. or Q'ty	Part No.	SP Description
HN129	- - -	(TO CN610/DRUM ASSEMBLY)
1pc	1-580-584-11	o HOUSING, LY 16P
5pcs	1-573-176-11	o CONTACT, FEMALE, AWG22-26
10pcs	1-580-599-11	o CONTACT, LY, FEMALE, AWG22-30
		(TO CN500/EQ-75 BOARD)
1pc	1-569-197-11	o HOUSING, 4P
1pc	1-569-192-11	o CONTACT, FEMALE, AWG22-26
2pcs	1-569-194-11	o CONTACT, FEMALE, AWG24-30
		(TO CN600/EQ-75 BOARD)
1pc	1-569-197-31	o HOUSING, 4P
1pc	1-569-192-11	o CONTACT, FEMALE, AWG22-26
2pcs	1-569-194-11	o CONTACT, FEMALE, AWG24-30
		(TO CN1500/EQ-75 BOARD)
1pc	1-569-197-21	o HOUSING, 4P
1pc	1-569-192-11	o CONTACT, FEMALE, AWG22-26
2pcs	1-569-194-11	o CONTACT, FEMALE, AWG24-30
		(TO CN100/EQ-75 BOARD)
1pc	1-569-199-11	o HOUSING, 6P
2pcs	1-569-192-11	o CONTACT, FEMALE, AWG22-26
4pcs	1-569-194-11	o CONTACT, FEMALE, AWG24-30
HN130	1-777-206-11	o WIRE, FLEXIBLE CARD 24P
		(TO CN3/MS-58 BOARD)
		(TO CN102/DR-315 BOARD)
HN131	1-777-206-11	o WIRE, FLEXIBLE CARD 24P
		(TO CN4/MS-58 BOARD)
		(TO CN103/DR-315 BOARD)
HN132	1-956-186-11	o HARNESS, SUB (S TEN-2)
		(TO CN25/MS-58 BOARD)
		(TO CN25/TC-102 BOARD)
HN133	- - -	(TO CN154/MB-818 BOARD)
1pc	1-569-199-11	o HOUSING, 6P
6pcs	1-569-191-11	o CONTACT, FEMALE, AWG22-26
		(TO CN1/MS-58 BOARD)
1pc	1-569-199-11	o HOUSING, 6P
6pcs	1-569-191-11	o CONTACT, FEMALE, AWG22-26
HN134	1-777-210-11	o CABLE, FLAT 50P
		(TO CN144/MB-818 BOARD)
		(TO CN2/MS-58 BOARD)
HN135	- - -	(TO CN140/MB-818 BOARD)
1pc	1-580-588-11	o HOUSING, LY 24P
24pcs	1-580-599-11	o CONTACT, LY, FEMALE, AWG22-30
		(TO CN140/MS-58 BOARD)
1pc	1-580-588-11	o HOUSING, LY 24P
24pcs	1-580-599-11	o CONTACT, LY, FEMALE, AWG22-30
HN137	1-951-925-12	o HARNESS, SUB (S-TEN REG)
		(TO CN1/TC-102 BOARD)
		(TO CN1/TR-78 BOARD)
HN138	- - -	(TO CN200/TC-102 BOARD)
1pc	1-569-196-11	o HOUSING, 3P
1pc	1-569-191-11	o CONTACT, FEMALE, AWG22-26
2pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
		(TO FULL ERASE HEAD)
1pc	1-569-196-11	o HOUSING, 3P
1pc	1-569-191-11	o CONTACT, FEMALE, AWG22-26
2pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30

(Cable/Harness List)

Ref. No. or Q'ty	Part No.	SP Description
HN139		(TO AT HEAD)
1pc	1-580-585-11	o HOUSING, LY 18P
2pcs	1-573-176-11	o CONTACT, FEMALE, AWG22-26
4pcs	1-580-599-11	o CONTACT, LY, FEMALE, AWG22-30
		(TO CN100/TC-102 BOARD)
1pc	1-569-196-11	o HOUSING, 3P
1pc	1-569-191-11	o CONTACT, FEMALE, AWG22-26
2pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
		(TO CN300/TC-102 BOARD)
1pc	1-569-196-41	o HOUSING, 3P
1pc	1-569-193-11	o CONTACT, FEMALE, AWG24-30
2pcs	1-569-191-11	o CONTACT, FEMALE, AWG22-26
HN201	1-751-360-11	s CABLE, FLAT 26P (FRONT SW2)
		(TO CN30/SWC-35 BOARD)
		(TO CN30/FP-117 BOARD)
HN202	1-751-359-12	s CABLE, FLAT 34P (FRONT SW1)
		(TO CN31/SWC-31 BOARD)
		(TO CN31/FP-117 BOARD)
HN203	1-951-935-11	o HARNESS, SUB (DISPLAY)
		(TO AUDIO LEVEL METER)
		(TO CN175/FP-117 BOARD)
HN204	1-751-352-11	s CABLE, FLAT 40P (FP CONT)
		(TO CN147/MB-818 BOARD)
		(TO CN147/FP-117 BOARD)
HN205	1-951-928-12	o HARNESS, SUB (VR RP2)
		(TO CN523/VR-224 BOARD)
		(TO CN511/VR-223 BOARD)
HN206	1-951-927-11	o HARNESS, SUB (VR RP1)
		(TO CN522/VR-224 BOARD)
		(TO CN510/VR-223 BOARD)
HN207	1-951-931-11	o HARNESS, SUB (JOG DIAL)
		(TO CN1/PTC-69 BOARD)
		(TO CN69/KY-438 BOARD)
HN208	- - -	(TO CN512/VR-223 BOARD)
1pc	1-569-201-11	o HOUSING, 8P
8pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
		(TO CN189/MB-818 BOARD)
1pc	1-562-741-11	o HOUSING, 8P
8pcs	1-564-832-11	o CONTACT, FEMALE, AWG24-30
HN209	1-777-212-13	o CABLE, FLAT 20P
		(TO CN145/KY-438 BOARD)
		(TO CN145/MB-818 BOARD)
HN210	- - -	(TO CN171/CP-334 BOARD)
1pc	1-569-207-11	o HOUSING, 14P
14pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
		(TO CN171/MB-818 BOARD)
1pc	1-569-207-11	o HOUSING, 14P
14pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
HN211	- - -	(TO CN172/CP-334 BOARD)
1pc	1-569-197-11	o HOUSING, 4P
4pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
		(TO CN172/MB-818 BOARD)
1pc	1-569-197-11	o HOUSING, 4P
4pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30

(Cable/Harness List)

Ref. No. or Q'ty	Part No.	SP Description
HN212	- - -	(TO CN190/MB-818 BOARD)
1pc	1-562-746-11	o HOUSING, 13P
12pcs	1-564-832-11	o CONTACT, FEMALE, AWG24-30
		(TO CN191/CP-278 BOARD)
1pc	1-569-206-11	o HOUSING, 13P
4pcs	1-569-191-11	o CONTACT, FEMALE, AWG22-26
8pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
HN213	- - -	(TO CN192/MB-818 BOARD)
1pc	1-562-745-11	o HOUSING, 12P
12pcs	1-564-832-11	o CONTACT, FEMALE, AWG24-30
		(TO CN192/CP-278 BOARD)
1pc	1-569-205-11	o HOUSING, 12P
4pcs	1-569-191-11	o CONTACT, FEMALE, AWG22-26
8pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
HN214	- - -	(TO CN193/MB-818 BOARD)
1pc	1-569-198-11	o HOUSING, 5P
5pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
		(TO CN193/CP-278 BOARD)
1pc	1-569-198-11	o HOUSING, 5P
5pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
HN215	- - -	(TO CN197/MB-818 BOARD)
1pc	1-569-202-11	o HOUSING, 9P
9pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
		(TO CN197/CP-335 BOARD)
1pc	1-569-202-11	o HOUSING, 9P
9pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
HN216	- - -	(TO CN196/CP-335 BOARD)
1pc	1-569-197-11	o HOUSING, 4P
4pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
		(TO CN196/MB-818 BOARD)
1pc	1-569-197-11	o HOUSING, 4P
4pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
HN217	- - -	(TO CN195/CP-301 BOARD)
1pc	1-569-199-11	o HOUSING, 6P
6pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
		(TO CN195/MB-818 BOARD)
1pc	1-569-199-11	o HOUSING, 6P
6pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
HN218	- - -	(TO CN170/CP-334 BOARD)
1pc	1-569-206-11	o HOUSING, 13P
13pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
		(TO CN170/MB-818 BOARD)
1pc	1-569-206-11	o HOUSING, 13P
13pcs	1-569-193-11	o CONTACT, FEMALE, AWG24-30
HN219	1-790-307-11	o CABLE COAXIAL 0.8m (RED)
		(TO CN100/SDI-41 BOARD)
		(TO SDI INPUT)
HN220	1-790-308-11	o CABLE COAXIAL 0.8m (YEL)
		(TO CN101/SDI-41 BOARD)
		(TO SDI INPUT "ACTIVE THROUGH OUTPUT")
HN221	1-790-309-11	o CABLE COAXIAL 0.8m (ORG)
		(TO CN700/SDI-41 BOARD)
		(TO SDI OUTPUT1)

3-3. External Connectors

(Cable/Harness List)

Ref. No. or Q'ty	Part No.	SP Description
HN222	1-790-314-11 o	CABLE COAXIAL 0.8m (GRN) (TO CN701/SDI-41 BOARD) (TO SDI OUTPUT2)
HN223	1-790-313-11 o	CABLE COAXIAL 0.8m (BLUE) (TO CN800/SDI-41 BOARD) (TO SDI OUTPUT3 "SUPER")
HN224	- - -	(TO CN194/CP-301 BOARD)
1pc	1-569-200-11 o	HOUSING, 7P
2pcs	1-569-191-11 o	CONTACT, FEMALE, AWG22-26
4pcs	1-569-193-11 o	CONTACT, FEMALE, AWG24-30 (TO CN194/MB-818 BOARD)
1pc	1-562-740-11 o	HOUSING, 7P
6pcs	1-564-832-11 o	CONTACT, FEMALE, AWG24-30
HN225	- - -	(TO CN146/RM-179 BOARD)
1pc	1-569-207-11 o	HOUSING, 14P
14pcs	1-569-193-11 o	CONTACT, FEMALE, AWG24-30 (TO CN146/MB-818 BOARD)
1pc	1-569-207-11 o	HOUSING, 14P
14pcs	1-569-193-11 o	CONTACT, FEMALE, AWG24-30
HN227	1-959-049-11 o	HARNESS, SUB (SW REG 202) (TO CN254/POWER SUPPLY UNIT) (TO CN151/MB-818 BOARD) (TO CN152/MB-818 BOARD) (TO CN153/MB-818 BOARD)
HN228	- - -	(TO CN150/MB-818 BOARD)
1pc	1-569-201-11 o	HOUSING, 8P
7pcs	1-569-191-11 o	CONTACT, FEMALE, AWG22-26 (TO CN252/POWER SUPPLY UNIT)
1pc	1-569-191-11 o	CONTACT, FEMALE, AWG22-26
7pcs	1-569-200-11 o	HOUSING, 7P
HN229	△ 1-959-050-12 o	HARNESS, SUB (POWER SW) (TO CN002/AC-169 BOARD) (TO CN101/POWER SUPPLY UNIT)
HN230	△ 1-951-965-21 o	HARNESS, SUB (BREAKER (UC)) (TO CN001/AC-169 BOARD) (TO CB1001"CIRCUIT BREAKER")
HN231	9-884-370-01 o	HARNESS, WH-01 (TO CN102/MAIN1 BOARD in POWER SUPPLY UNIT) (TO CN1/MAIN2 BOARD in POWER SUPPLY UNIT)

Ref. No. or Q'ty	Part No.	SP Description
AES/EBU INPUT CH1/2	1-764-275-11 s	CONNECTOR, BNC, FEMALE
AES/EBU INPUT CH3/4	1-764-275-11 s	CONNECTOR, BNC, FEMALE
AES/EBU OUTPUT CH1/2	1-764-275-11 s	CONNECTOR, BNC, FEMALE
AES/EBU OUTPUT CH3/4	1-764-275-11 s	CONNECTOR, BNC, FEMALE
AUDIO INPUT CH1/CH2	1-750-786-21 s	CONNECTOR, DUAL XLR 3P, FEMALE For E
	1-750-785-21 s	CONNECTOR, DUAL XLR 3P, MALE For J
AUDIO INPUT CH3/CH4	1-750-786-21 s	CONNECTOR, DUAL XLR 3P, FEMALE For E
	1-750-785-21 s	CONNECTOR, DUAL XLR 3P, MALE For J
AUDIO OUTPUT CH1/CH2	1-750-785-21 s	CONNECTOR, DUAL XLR 3P, MALE For E
	1-750-786-21 s	CONNECTOR, DUAL XLR 3P, FEMALE For J
AUDIO OUTPUT CH3/CH4	1-750-785-21 s	CONNECTOR, DUAL XLR 3P, MALE For E
	1-750-786-21 s	CONNECTOR, DUAL XLR 3P, FEMALE For J
CONTROL PANEL	1-785-299-11 o	CONNECTOR, D-SUB 29P, MALE
MONITOR OUTPUT R/L	1-750-786-21 s	CONNECTOR, DUAL XLR 3P, FEMALE For J
	1-750-785-21 s	CONNECTOR, DUAL XLR 3P, MALE For E
PHONE	1-507-863-51 s	JACK, LARGE TYPE
REMOTE1 IN	1-563-770-11 s	CONNECTOR, D-SUB 9P, FEMALE
REMOTE1 OUT	1-563-770-11 s	CONNECTOR, D-SUB 9P, FEMALE
REMOTE2 PALALLEL I/O	1-563-893-21 s	CONNECTOR, D-SUB 50P, FEMALE
RS-232C	1-565-388-11 o	CONNECTOR, D-SUB 9P, MALE
SDI INPUT	1-784-240-11 s	CONVERT CONNECTOR, COAXIAL
SDI INPUT (ACTIVE THROUGH OUT)	1-784-240-11 s	CONVERT CONNECTOR, COAXIAL
SDI OUTPUT 1	1-784-240-11 s	CONVERT CONNECTOR, COAXIAL
SDI OUTPUT 2	1-784-240-11 s	CONVERT CONNECTOR, COAXIAL

Ref. No. or Q'ty	Part No.	SP Description
SDI OUTPUT 3 (SUPER)		
	1-784-240-11	s CONVERT CONNECTOR, COAXIAL
TIME CODE IN		
	1-750-787-21	s CONNECTOR, XLR 3P, MALE For J
	1-750-788-21	s CONNECTOR, XLR 3P, FEMALE For E
TIME CODE OUT		
	1-750-788-21	s CONNECTOR, XLR 3P, FEMALE For J
	1-750-787-21	s CONNECTOR, XLR 3P, MALE For E
VIDEO CONTROL		
	1-764-102-11	s CONNECTOR, D-SUB 15P, MALE
VIDEO INPUT COMPONENT Y/R-Y/B-Y		
	1-573-584-11	s CONNECTOR, 3-BNC, FEMALE
VIDEO INPUT COMPOSITE (THUR-OUT)		
	1-573-580-11	s CONNECTOR, 2-BNC, FEMALE
VIDEO INPUT REF (THUR-OUT)		
	1-573-580-11	s CONNECTOR, 2-BNC, FEMALE
VIDEO OUTPUT COMPONENT Y/R-Y/B-Y		
	1-573-584-11	s CONNECTOR, 3-BNC, FEMALE
VIDEO OUTPUT COMPOSITE 1/2/3 (SUPER)		
	1-573-584-11	s CONNECTOR, 3-BNC, FEMALE

3-4. Each Board

Index

Board		Page
AC-169		3-7
APR-40		3-7
CCM-15	for Reel shift motor for Threading motor	3-22 3-22
CL-29		3-22
CP-278	for E for J	3-22 3-23
CP-301	for E for J	3-24 3-25
CP-334		3-26
CP-335		3-27
DEC-110		3-28
DPR-118		3-37
DR-315		3-44
EQ-75		3-48
FP-117		3-56
KY-438		3-58
LP-81		3-62
MB-818		3-63
MS-58		3-64
PC-70		3-67
PD-35		3-67
PTC-54		3-67
PTC-59		3-67
PTC-69		3-68
PTC-71		3-68
RM-130		3-68
RM-179		3-70
RM-181	for S reel motor for T reel motor	3-70 3-70
SDI-41		3-70
SE-344		3-77
SE-461		3-77
SS-83		3-77
SWC-31		3-88
SWC-35		3-89
TC-102		3-91
TR-78		3-93
TR-79		3-93
VPR-47	for DNW-75 for DNW-75P	3-93 3-106
VR-223		3-118
VR-224		3-119

In Power Supply Unit (Section 3-5)

Board	Page
MAIN1	3-120
MAIN2	3-121
SUB201	3-122
SUB251	3-123

AC-169 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8319-242-A	o MOUNTED CIRCUIT BOARD, AC-169K
C1	△ 1-115-166-11	s FILM 0.22uF 20% 275V
C2	△ 1-113-905-11	s CERAMIC 220pF 10% 250V
C3	△ 1-113-905-11	s CERAMIC 220pF 10% 250V
C4	△ 1-113-905-11	s CERAMIC 220pF 10% 250V
CN1	△ 1-580-838-11	o CONNECTOR, PC BOARD 4P, MALE
CN2	△ 1-691-959-11	o CONNECTOR, PC BOARD 4P, MALE
CN3	△ 1-580-375-11	s INLET, AC 3P, MALE
L1	△ 1-421-944-31	s TRANSFORMER, LINE FILTER
R1	△ 1-202-884-11	s SOLID 820K 20% 1/2W

APR-40 BOARD

Ref. No. or Q'ty	Part No.	SP Description
*a: Lot No. 905 only		
*b: Lot No. 906 and higher		
*c: Lot No. 905 and 906		
*d: Lot No. 907 and higher		
1pc	A-8323-234-A	o MOUNTED CIRCUIT BOARD, APR-40E
1pc	3-171-453-03	o PLATE (L), SHIELD, CARD
1pc	3-171-454-02	o SHEET (L), CARD
6pcs	7-682-902-11	s SCREW +PWH 2.6x5
1pc	3-179-084-01	s LEVER (R), PC BOARD
1pc	3-179-085-01	s LEVER (L), PC BOARD
C100	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C101	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C102	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C103	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C104	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C105	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C106	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C107	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C108	1-115-672-11	s ELECT 10uF 20% 35V
C109	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C110	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C111	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C112	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C113	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C114	1-115-672-11	s ELECT 10uF 20% 35V
C115	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C116	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C117	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C118	1-115-671-11	s FILM, CHIP 0.0047uF 5% 50V (3216)
C119	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V (2012)
C120	1-104-543-11	s FILM, CHIP 0.0022uF 5% 50V (2012)
C121	1-115-671-11	s FILM, CHIP 0.0047uF 5% 50V (3216)
C122	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C123	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C124	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C125	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C126	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C127	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C128	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C129	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C130	1-115-340-11	s CERAMIC, CHIP 0.22uF 10% 25V (2012)
C131	1-115-340-11	s CERAMIC, CHIP 0.22uF 10% 25V (2012)
C132	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C133	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C134	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C135	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C136	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C137	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C138	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C139	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C140	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C141	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C142	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C143	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C200	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C201	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C202	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C203	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C204	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C205	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C206	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C207	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C208	1-115-672-11	s ELECT 10uF 20% 35V
C209	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C210	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C211	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C212	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C213	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C214	1-115-672-11	s ELECT 10uF 20% 35V
C215	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C216	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C217	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C218	1-115-671-11	s FILM, CHIP 0.0047uF 5% 50V (3216)
C219	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V (2012)
C220	1-104-543-11	s FILM, CHIP 0.0022uF 5% 50V (2012)
C221	1-115-671-11	s FILM, CHIP 0.0047uF 5% 50V (3216)
C222	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C223	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C224	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C225	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C226	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C227	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C228	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C300	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C301	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C302	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C303	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C304	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C305	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C306	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C307	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C308	1-115-672-11	s ELECT 10uF 20% 35V
C309	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C310	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C311	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C312	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C313	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C314	1-115-672-11	s ELECT 10uF 20% 35V
C315	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C316	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C317	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C318	1-115-671-11	s FILM, CHIP 0.0047uF 5% 50V (3216)
C319	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V (2012)
C320	1-104-543-11	s FILM, CHIP 0.0022uF 5% 50V (2012)
C321	1-115-671-11	s FILM, CHIP 0.0047uF 5% 50V (3216)
C322	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C323	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C324	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C325	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C326	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C327	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C328	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C329	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C330	1-115-340-11	s CERAMIC, CHIP 0.22uF 10% 25V (2012)
C331	1-115-340-11	s CERAMIC, CHIP 0.22uF 10% 25V (2012)
C332	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C333	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C334	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C335	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C336	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C337	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C338	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C339	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C340	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C341	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C342	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C343	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C400	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C401	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C402	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C403	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C404	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C405	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C406	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C407	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C408	1-115-672-11	s ELECT 10uF 20% 35V
C409	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C410	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C411	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C412	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C413	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C414	1-115-672-11	s ELECT 10uF 20% 35V
C415	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C416	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C417	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C418	1-115-671-11	s FILM, CHIP 0.0047uF 5% 50V (3216)
C419	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V (2012)
C420	1-104-543-11	s FILM, CHIP 0.0022uF 5% 50V (2012)
C421	1-115-671-11	s FILM, CHIP 0.0047uF 5% 50V (3216)
C422	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C423	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C424	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C425	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C426	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C427	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C428	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C444	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C500	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C501	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C502	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C503	1-126-400-11	s ELECT, CHIP 22uF 20% 35V
C504	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C505	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C506	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C507	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C508	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C509	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C511	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C512	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C513	1-104-543-11	s FILM, CHIP 0.0022uF 5% 50V (2012)
C514	1-104-539-11	s FILM, CHIP 0.001uF 5% 50V (2012)
C515	1-115-672-11	s ELECT 10uF 20% 35V
C516	1-115-671-11	s FILM, CHIP 0.0047uF 5% 50V (3216)
C517	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C518	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C520	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C707	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C708	1-126-399-11	s	ELECT, CHIP 10uF 20% 35V
C709	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C711	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C712	1-126-399-11	s	ELECT, CHIP 10uF 20% 35V
C713	1-104-543-11	s	FILM, CHIP 0.0022uF 5% 50V (2012)
C714	1-104-539-11	s	FILM, CHIP 0.001uF 5% 50V (2012)
C715	1-115-672-11	s	ELECT 10uF 20% 35V
C716	1-115-671-11	s	FILM, CHIP 0.0047uF 5% 50V (3216)
C717	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C718	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C719	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C720	1-163-227-11	s	CERAMIC, CHIP 10pF 5% 50V (2012)
C721	1-124-282-00	s	ELECT, NONPOLAR 22uF 20% 25V
C722	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V (2012)
C723	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C724	1-107-420-11	s	ELECT, CHIP 47uF 20% 35V
C725	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C726	1-107-420-11	s	ELECT, CHIP 47uF 20% 35V
C727	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C728	1-124-282-00	s	ELECT, NONPOLAR 22uF 20% 25V
C729	1-124-282-00	s	ELECT, NONPOLAR 22uF 20% 25V
C730	1-124-282-00	s	ELECT, NONPOLAR 22uF 20% 25V
C731	1-104-539-11	s	FILM, CHIP 0.001uF 5% 50V (2012)
C732	1-124-282-00	s	ELECT, NONPOLAR 22uF 20% 25V
C733	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V (2012)
C734	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C735	1-124-282-00	s	ELECT, NONPOLAR 22uF 20% 25V
C736	1-128-416-11	s	ELECT, CHIP 100uF 20% 16V
C737	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C800	1-107-420-11	s	ELECT, CHIP 47uF 20% 35V
C801	1-128-416-11	s	ELECT, CHIP 100uF 20% 16V
C802	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C803	1-126-400-11	s	ELECT, CHIP 22uF 20% 35V
C804	1-128-416-11	s	ELECT, CHIP 100uF 20% 16V
C805	1-128-416-11	s	ELECT, CHIP 100uF 20% 16V
C806	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C807	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C808	1-126-399-11	s	ELECT, CHIP 10uF 20% 35V
C809	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C811	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C812	1-126-399-11	s	ELECT, CHIP 10uF 20% 35V
C813	1-104-543-11	s	FILM, CHIP 0.0022uF 5% 50V (2012)
C814	1-104-539-11	s	FILM, CHIP 0.001uF 5% 50V (2012)
C815	1-115-672-11	s	ELECT 10uF 20% 35V
C816	1-115-671-11	s	FILM, CHIP 0.0047uF 5% 50V (3216)
C817	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C818	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C819	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C820	1-163-227-11	s	CERAMIC, CHIP 10pF 5% 50V (2012)
C821	1-124-282-00	s	ELECT, NONPOLAR 22uF 20% 25V
C822	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V (2012)
C823	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C824	1-107-420-11	s	ELECT, CHIP 47uF 20% 35V
C825	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C826	1-107-420-11	s	ELECT, CHIP 47uF 20% 35V
C827	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C828	1-124-282-00	s	ELECT, NONPOLAR 22uF 20% 25V
C829	1-124-282-00	s	ELECT, NONPOLAR 22uF 20% 25V

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C830	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C831	1-104-539-11	s FILM, CHIP 0.001uF 5% 50V (2012)
C832	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C833	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C834	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C835	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C836	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C900	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C901	1-126-400-11	s ELECT, CHIP 22uF 20% 35V
C902	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C903	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C904	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C905	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C906	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C907	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C908	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C909	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C911	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C912	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C913	1-104-543-11	s FILM, CHIP 0.0022uF 5% 50V (2012)
C914	1-104-539-11	s FILM, CHIP 0.001uF 5% 50V (2012)
C915	1-115-672-11	s ELECT 10uF 20% 35V
C916	1-115-671-11	s FILM, CHIP 0.0047uF 5% 50V (3216)
C917	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C918	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C919	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C920	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V (2012)
C921	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C922	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C923	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C924	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C925	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C926	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C927	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C928	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C929	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C930	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C931	1-104-539-11	s FILM, CHIP 0.001uF 5% 50V (2012)
C932	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C933	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C934	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C935	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C936	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C975	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1000	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C1001	1-126-400-11	s ELECT, CHIP 22uF 20% 35V
C1002	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C1003	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C1004	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C1005	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1006	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1007	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C1008	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1009	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1011	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C1012	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C1013	1-104-543-11	s FILM, CHIP 0.0022uF 5% 50V (2012)
C1014	1-104-539-11	s FILM, CHIP 0.001uF 5% 50V (2012)
C1015	1-115-672-11	s ELECT 10uF 20% 35V

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C1016	1-115-671-11	s FILM, CHIP 0.0047uF 5% 50V (3216)
C1017	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1018	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1019	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1020	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V (2012)
C1021	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C1022	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C1023	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C1024	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C1025	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C1026	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C1027	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C1028	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C1029	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C1030	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C1031	1-104-539-11	s FILM, CHIP 0.001uF 5% 50V (2012)
C1032	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C1033	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C1034	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1035	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1036	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C1100	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1101	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1102	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1103	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1104	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1105	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1106	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1107	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1108	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1109	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1110	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1111	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1112	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1113	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1200	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1201	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1202	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1203	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1204	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1205	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1206	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1207	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1208	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C1209	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C1210	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1211	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C1212	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C1213	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1214	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C1215	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1216	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1217	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C1219	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1220	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C1222	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1223	1-107-420-11	s ELECT, CHIP 47uF 20% 35V
C1224	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1225	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1226	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1227	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1300	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1301	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1302	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1303	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1304	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1356	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1357	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1358	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1408	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1409	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1427	1-126-399-11	s	ELECT, CHIP 10uF 20% 35V
C1428	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1429	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1430	1-126-399-11	s	ELECT, CHIP 10uF 20% 35V
C1431	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1432	1-126-399-11	s	ELECT, CHIP 10uF 20% 35V
C1433	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1434	1-126-399-11	s	ELECT, CHIP 10uF 20% 35V
C1435	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1436	1-126-399-11	s	ELECT, CHIP 10uF 20% 35V
C1437	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1438	1-126-399-11	s	ELECT, CHIP 10uF 20% 35V
C1442	1-126-399-11	s	ELECT, CHIP 10uF 20% 35V
C1443	1-128-416-11	s	ELECT, CHIP 100uF 20% 16V
C1444	1-128-416-11	s	ELECT, CHIP 100uF 20% 16V
C1445	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1446	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1447	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1452	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1453	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1454	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
CN116	1-778-261-12	o	CONNECTOR, B-B 124P, MALE
CN117	1-778-261-12	o	CONNECTOR, B-B 124P, MALE
CN118	1-778-262-12	o	CONNECTOR, B-B 148P, MALE
COP100	1-565-413-11	o	PLUG, SHORTING
COP101	1-565-413-11	o	PLUG, SHORTING
COP200	1-565-413-11	o	PLUG, SHORTING
COP201	1-565-413-11	o	PLUG, SHORTING
COP300	1-565-413-11	o	PLUG, SHORTING
COP301	1-565-413-11	o	PLUG, SHORTING
COP400	1-565-413-11	o	PLUG, SHORTING
COP401	1-565-413-11	o	PLUG, SHORTING
COP500	1-565-413-11	o	PLUG, SHORTING
COP501	1-565-413-11	o	PLUG, SHORTING
COP600	1-565-413-11	o	PLUG, SHORTING
COP601	1-565-413-11	o	PLUG, SHORTING
COP700	1-565-413-11	o	PLUG, SHORTING
COP701	1-565-413-11	o	PLUG, SHORTING
COP800	1-565-413-11	o	PLUG, SHORTING
COP801	1-565-413-11	o	PLUG, SHORTING
COP900	1-565-413-11	o	PLUG, SHORTING
COP901	1-565-413-11	o	PLUG, SHORTING
COP902	1-565-413-11	o	PLUG, SHORTING
COP950	1-565-413-11	o	PLUG, SHORTING
COP951	1-565-413-11	o	PLUG, SHORTING
COP952	1-565-413-11	o	PLUG, SHORTING

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
COR100	1-566-388-11	s	CONNECTOR, 8P, MALE
COR101	1-566-388-11	s	CONNECTOR, 8P, MALE
COR200	1-566-388-11	s	CONNECTOR, 8P, MALE
COR201	1-566-388-11	s	CONNECTOR, 8P, MALE
COR300	1-566-388-11	s	CONNECTOR, 8P, MALE
COR301	1-566-388-11	s	CONNECTOR, 8P, MALE
COR400	1-566-388-11	s	CONNECTOR, 8P, MALE
COR401	1-566-388-11	s	CONNECTOR, 8P, MALE
COR500	1-566-388-11	s	CONNECTOR, 8P, MALE
COR501	1-566-388-11	s	CONNECTOR, 8P, MALE
COR600	1-566-388-11	s	CONNECTOR, 8P, MALE
COR601	1-566-388-11	s	CONNECTOR, 8P, MALE
COR700	1-566-388-11	s	CONNECTOR, 8P, MALE
COR701	1-566-388-11	s	CONNECTOR, 8P, MALE
COR800	1-566-388-11	s	CONNECTOR, 8P, MALE
COR801	1-566-388-11	s	CONNECTOR, 8P, MALE
COR900	1-566-388-11	s	CONNECTOR, 8P, MALE
COR901	1-566-388-11	s	CONNECTOR, 8P, MALE
COR902	1-566-388-11	s	CONNECTOR, 8P, MALE
COR950	1-566-388-11	s	CONNECTOR, 8P, MALE
COR951	1-566-388-11	s	CONNECTOR, 8P, MALE
COR952	1-566-388-11	s	CONNECTOR, 8P, MALE
D100	8-719-801-48	s	DIODE 1SS193
D101	8-719-068-64	s	DIODE MA143A-(TX).SO
D102	8-719-068-64	s	DIODE MA143A-(TX).SO
D103	8-719-941-23	s	DIODE DA204U
D104	8-719-941-23	s	DIODE DA204U
D105	8-719-941-04	s	DIODE SB007-03CP
D200	8-719-801-48	s	DIODE 1SS193
D201	8-719-068-64	s	DIODE MA143A-(TX).SO
D202	8-719-068-64	s	DIODE MA143A-(TX).SO
D203	8-719-941-23	s	DIODE DA204U
D204	8-719-941-23	s	DIODE DA204U
D300	8-719-801-48	s	DIODE 1SS193
D301	8-719-068-64	s	DIODE MA143A-(TX).SO
D302	8-719-068-64	s	DIODE MA143A-(TX).SO
D303	8-719-941-23	s	DIODE DA204U
D304	8-719-941-23	s	DIODE DA204U
D305	8-719-941-04	s	DIODE SB007-03CP
D400	8-719-801-48	s	DIODE 1SS193
D401	8-719-068-64	s	DIODE MA143A-(TX).SO
D402	8-719-068-64	s	DIODE MA143A-(TX).SO
D403	8-719-941-23	s	DIODE DA204U
D404	8-719-941-23	s	DIODE DA204U
D500	8-719-941-04	s	DIODE SB007-03CP
D501	8-719-801-48	s	DIODE 1SS193
D502	8-719-068-64	s	DIODE MA143A-(TX).SO
D503	8-719-068-64	s	DIODE MA143A-(TX).SO
D504	8-719-017-09	s	DIODE 02DZ6.2
D600	8-719-941-04	s	DIODE SB007-03CP
D601	8-719-801-48	s	DIODE 1SS193
D602	8-719-068-64	s	DIODE MA143A-(TX).SO
D603	8-719-068-64	s	DIODE MA143A-(TX).SO
D604	8-719-017-09	s	DIODE 02DZ6.2
D700	8-719-941-04	s	DIODE SB007-03CP
D701	8-719-801-48	s	DIODE 1SS193
D702	8-719-068-64	s	DIODE MA143A-(TX).SO
D703	8-719-068-64	s	DIODE MA143A-(TX).SO

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
D704	8-719-017-09	s DIODE 02DZ6.2
D800	8-719-941-04	s DIODE SB007-03CP
D801	8-719-801-48	s DIODE 1SS193
D802	8-719-068-64	s DIODE MA143A-(TX).SO
D803	8-719-068-64	s DIODE MA143A-(TX).SO
D804	8-719-017-09	s DIODE 02DZ6.2
D900	8-719-941-04	s DIODE SB007-03CP
D901	8-719-801-48	s DIODE 1SS193
D902	8-719-068-64	s DIODE MA143A-(TX).SO
D903	8-719-068-64	s DIODE MA143A-(TX).SO
D904	8-719-017-09	s DIODE 02DZ6.2
D1000	8-719-941-04	s DIODE SB007-03CP
D1001	8-719-801-48	s DIODE 1SS193
D1002	8-719-068-64	s DIODE MA143A-(TX).SO
D1003	8-719-068-64	s DIODE MA143A-(TX).SO
D1004	8-719-017-09	s DIODE 02DZ6.2
D1400	8-719-941-04	s DIODE SB007-03CP
D1401	8-719-941-23	s DIODE DA204U
D1402	8-719-941-23	s DIODE DA204U
D1407	8-719-941-23	s DIODE DA204U
IC100	8-759-064-92	s IC NJM5532M-D
IC101	8-759-112-66	s IC UPC812G2
IC102	8-759-745-64	s IC NJM4560M
IC103	8-759-518-74	s IC DBX2151
IC104	8-759-745-64	s IC NJM4560M
IC105	8-759-745-64	s IC NJM4560M
IC106	8-759-745-64	s IC NJM4560M
IC108	8-759-336-17	s IC AK5390-VS
IC109	8-759-234-08	s IC TA78L05F
IC110	8-759-446-74	s IC TA79L05F
IC200	8-759-064-92	s IC NJM5532M-D
IC201	8-759-112-66	s IC UPC812G2
IC202	8-759-745-64	s IC NJM4560M
IC203	8-759-518-74	s IC DBX2151
IC204	8-759-745-64	s IC NJM4560M
IC205	8-759-745-64	s IC NJM4560M
IC206	8-759-745-64	s IC NJM4560M
IC300	8-759-064-92	s IC NJM5532M-D
IC301	8-759-112-66	s IC UPC812G2
IC302	8-759-745-64	s IC NJM4560M
IC303	8-759-518-74	s IC DBX2151
IC304	8-759-745-64	s IC NJM4560M
IC305	8-759-745-64	s IC NJM4560M
IC306	8-759-745-64	s IC NJM4560M
IC308	8-759-336-17	s IC AK5390-VS
IC309	8-759-234-08	s IC TA78L05F
IC310	8-759-446-74	s IC TA79L05F
IC400	8-759-064-92	s IC NJM5532M-D
IC401	8-759-112-66	s IC UPC812G2
IC402	8-759-745-64	s IC NJM4560M
IC403	8-759-518-74	s IC DBX2151
IC404	8-759-745-64	s IC NJM4560M
IC405	8-759-745-64	s IC NJM4560M
IC406	8-759-745-64	s IC NJM4560M
IC500	8-759-348-81	s IC SM5843AS1
IC501	8-759-253-91	s IC PCM1702U
IC502	8-759-234-08	s IC TA78L05F
IC503	8-759-700-94	s IC NJM5532M
IC504	8-759-446-74	s IC TA79L05F

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC505	8-759-745-64	s IC NJM4560M
IC506	8-759-745-64	s IC NJM4560M
IC507	8-759-745-64	s IC NJM4560M
IC508	*b 8-759-588-96	s IC NJM5532L-D
	*a 8-759-521-14	s IC NJM5532S-D
IC509	*b 8-759-588-96	s IC NJM5532L-D
	*a 8-759-521-14	s IC NJM5532S-D
IC510	8-759-745-64	s IC NJM4560M
IC601	8-759-253-91	s IC PCM1702U
IC602	8-759-234-08	s IC TA78L05F
IC603	8-759-700-94	s IC NJM5532M
IC604	8-759-446-74	s IC TA79L05F
IC605	8-759-745-64	s IC NJM4560M
IC606	8-759-745-64	s IC NJM4560M
IC607	8-759-745-64	s IC NJM4560M
IC608	*b 8-759-588-96	s IC NJM5532L-D
	*a 8-759-521-14	s IC NJM5532S-D
IC609	*b 8-759-588-96	s IC NJM5532L-D
	*a 8-759-521-14	s IC NJM5532S-D
IC610	8-759-745-64	s IC NJM4560M
IC700	8-759-348-81	s IC SM5843AS1
IC701	8-759-253-91	s IC PCM1702U
IC702	8-759-234-08	s IC TA78L05F
IC703	8-759-700-94	s IC NJM5532M
IC704	8-759-446-74	s IC TA79L05F
IC705	8-759-745-64	s IC NJM4560M
IC706	8-759-745-64	s IC NJM4560M
IC707	8-759-745-64	s IC NJM4560M
IC708	*b 8-759-588-96	s IC NJM5532L-D
	*a 8-759-521-14	s IC NJM5532S-D
IC709	*b 8-759-588-96	s IC NJM5532L-D
	*a 8-759-521-14	s IC NJM5532S-D
IC710	8-759-745-64	s IC NJM4560M
IC801	8-759-253-91	s IC PCM1702U
IC802	8-759-234-08	s IC TA78L05F
IC803	8-759-700-94	s IC NJM5532M
IC804	8-759-446-74	s IC TA79L05F
IC805	8-759-745-64	s IC NJM4560M
IC806	8-759-745-64	s IC NJM4560M
IC807	8-759-745-64	s IC NJM4560M
IC808	*b 8-759-588-96	s IC NJM5532L-D
	*a 8-759-521-14	s IC NJM5532S-D
IC809	*b 8-759-588-96	s IC NJM5532L-D
	*a 8-759-521-14	s IC NJM5532S-D
IC810	8-759-745-64	s IC NJM4560M
IC900	8-759-253-91	s IC PCM1702U
IC901	8-759-064-92	s IC NJM5532M-D
IC902	8-759-234-08	s IC TA78L05F
IC903	8-759-446-74	s IC TA79L05F
IC904	8-759-745-64	s IC NJM4560M
IC906	8-759-745-64	s IC NJM4560M
IC907	8-759-745-64	s IC NJM4560M
IC908	*b 8-759-588-96	s IC NJM5532L-D
	*a 8-759-521-14	s IC NJM5532S-D
IC909	*b 8-759-588-96	s IC NJM5532L-D
	*a 8-759-521-14	s IC NJM5532S-D
IC910	8-759-745-64	s IC NJM4560M
IC975	8-759-348-81	s IC SM5843AS1
IC1000	8-759-253-91	s IC PCM1702U
IC1001	8-759-064-92	s IC NJM5532M-D

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1002	8-759-234-08	s IC	TA78L05F
IC1003	8-759-446-74	s IC	TA79L05F
IC1004	8-759-745-64	s IC	NJM4560M
IC1006	8-759-745-64	s IC	NJM4560M
IC1007	8-759-745-64	s IC	NJM4560M
IC1008*b	8-759-588-96	s IC	NJM5532L-D
*a	8-759-521-14	s IC	NJM5532S-D
IC1009*b	8-759-588-96	s IC	NJM5532L-D
*a	8-759-521-14	s IC	NJM5532S-D
IC1010	8-759-745-64	s IC	NJM4560M
IC1100	8-759-186-63	s IC	TC74VHC245F
IC1102	8-759-177-76	s IC	CXD8811AQ
IC1103	8-759-253-97	s IC	CXD8859AQ
IC1104	8-759-482-24	s IC	IDT71V016S20Y
IC1105	8-759-186-39	s IC	TC74VHC74F
IC1106	8-759-391-30	s IC	74LVX3245QSC
IC1200	8-759-186-63	s IC	TC74VHC245F
IC1201	8-759-186-63	s IC	TC74VHC245F
IC1204	8-759-174-16	s IC	TC74VHC244F
IC1205	8-759-186-39	s IC	TC74VHC74F
IC1206	8-759-186-63	s IC	TC74VHC245F
IC1207	8-759-174-16	s IC	TC74VHC244F
IC1208	8-759-391-30	s IC	74LVX3245QSC
IC1209	8-759-081-44	s IC	TC74VHC04F
IC1210	8-759-186-39	s IC	TC74VHC74F
IC1211	8-759-081-48	s IC	TC74VHC08F
IC1212	8-759-081-44	s IC	TC74VHC04F
IC1213	8-759-186-53	s IC	TC74VHC163F
IC1214	8-759-186-53	s IC	TC74VHC163F
IC1215	8-759-186-32	s IC	TC74VHC21F
IC1216	8-759-081-48	s IC	TC74VHC08F
IC1300	8-759-590-19	s IC	CXD9068BR
IC1301	8-759-391-30	s IC	74LVX3245QSC
IC1302	8-759-252-89	s IC	AD1890JP
IC1303	8-759-186-63	s IC	TC74VHC245F
IC1304	8-759-252-89	s IC	AD1890JP
IC1305	8-759-186-53	s IC	TC74VHC163F
IC1400	8-759-391-30	s IC	74LVX3245QSC
IC1401	8-759-186-77	s IC	TC74VHC541F
IC1402	8-759-186-77	s IC	TC74VHC541F
IC1403	8-759-154-60	s IC	UPD71055GB-10-3B4
IC1404	8-759-154-60	s IC	UPD71055GB-10-3B4
IC1405	8-759-081-44	s IC	TC74VHC04F
IC1406	8-759-081-44	s IC	TC74VHC04F
IC1407	8-759-186-47	s IC	TC74VHC138F
IC1408	8-759-081-48	s IC	TC74VHC08F
IC1409	8-759-112-66	s IC	UPC812G2
IC1410	8-759-112-66	s IC	UPC812G2
IC1411	8-759-234-08	s IC	TA78L05F
IC1412	8-759-497-38	s IC	LTC1458CG
IC1413	8-759-542-91	s IC	S-80840ANUP-ED4
IC1414	8-759-542-91	s IC	S-80840ANUP-ED4
IC1415	8-759-186-63	s IC	TC74VHC245F
IC1416	8-759-391-30	s IC	74LVX3245QSC
PS1200 Δ	1-533-271-21	s FUSE	CHIP 0.5A 125V
Q100	8-729-101-07	s TRANSISTOR	2SB798-DL
Q101	8-729-140-63	s TRANSISTOR	2SA1611-M5M6
Q102	8-729-012-35	s TRANSISTOR	2SK711-BL

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q200	8-729-101-07	s TRANSISTOR	2SB798-DL
Q201	8-729-140-63	s TRANSISTOR	2SA1611-M5M6
Q202	8-729-012-35	s TRANSISTOR	2SK711-BL
Q300	8-729-101-07	s TRANSISTOR	2SB798-DL
Q301	8-729-140-63	s TRANSISTOR	2SA1611-M5M6
Q302	8-729-012-35	s TRANSISTOR	2SK711-BL
Q400	8-729-101-07	s TRANSISTOR	2SB798-DL
Q401	8-729-140-63	s TRANSISTOR	2SA1611-M5M6
Q402	8-729-012-35	s TRANSISTOR	2SK711-BL
Q500	8-729-012-35	s TRANSISTOR	2SK711-BL
Q501	8-729-140-63	s TRANSISTOR	2SA1611-M5M6
Q502	8-729-117-32	s TRANSISTOR	2SC4177-L6
Q600	8-729-012-35	s TRANSISTOR	2SK711-BL
Q601	8-729-140-63	s TRANSISTOR	2SA1611-M5M6
Q602	8-729-117-32	s TRANSISTOR	2SC4177-L6
Q700	8-729-012-35	s TRANSISTOR	2SK711-BL
Q701	8-729-140-63	s TRANSISTOR	2SA1611-M5M6
Q702	8-729-117-32	s TRANSISTOR	2SC4177-L6
Q800	8-729-012-35	s TRANSISTOR	2SK711-BL
Q801	8-729-140-63	s TRANSISTOR	2SA1611-M5M6
Q802	8-729-117-32	s TRANSISTOR	2SC4177-L6
Q900	8-729-012-35	s TRANSISTOR	2SK711-BL
Q901	8-729-140-63	s TRANSISTOR	2SA1611-M5M6
Q902	8-729-117-32	s TRANSISTOR	2SC4177-L6
Q1000	8-729-012-35	s TRANSISTOR	2SK711-BL
Q1001	8-729-140-63	s TRANSISTOR	2SA1611-M5M6
Q1002	8-729-117-32	s TRANSISTOR	2SC4177-L6
Q1400	8-729-028-73	s TRANSISTOR	DTA114EUA
Q1401	8-729-907-00	s TRANSISTOR	DTC114EU
Q1402	8-729-907-00	s TRANSISTOR	DTC114EU
Q1403	8-729-907-00	s TRANSISTOR	DTC114EU
Q1404	8-729-907-00	s TRANSISTOR	DTC114EU
R100	1-220-154-11	s METAL, CHIP	100K 0.1% 1/16W (2012)
R101	1-220-154-11	s METAL, CHIP	100K 0.1% 1/16W (2012)
R102	1-218-367-11	s METAL, CHIP	10K 0.1% 1/16W (2012)
R103	1-218-367-11	s METAL, CHIP	10K 0.1% 1/16W (2012)
R104	1-216-081-00	s METAL, CHIP	22K 5% 1/10W (2012)
R105	1-216-658-11	s METAL, CHIP	2.0K 0.5% 1/10W (2012)
R106	1-216-657-11	s METAL, CHIP	1.8K 0.5% 1/10W (2012)
R107	1-216-667-11	s METAL, CHIP	4.7K 0.5% 1/10W (2012)
R108	1-216-658-11	s METAL, CHIP	2.0K 0.5% 1/10W (2012)
R109	1-216-675-11	s METAL, CHIP	10K 0.5% 1/10W (2012)
R110	1-216-651-11	s METAL, CHIP	1.0K 0.5% 1/10W (2012)
R111	1-216-025-00	s METAL, CHIP	100 5% 1/10W (2012)
R112	1-216-121-00	s METAL, CHIP	1.0M 5% 1/10W (2012)
R113	1-216-611-11	s METAL, CHIP	22 0.5% 1/10W (2012)
R114	1-216-661-11	s METAL, CHIP	2.7K 0.5% 1/10W (2012)
R115	1-216-641-11	s METAL, CHIP	390 0.5% 1/10W (2012)
R116	1-216-668-11	s METAL, CHIP	5.1K 0.5% 1/10W (2012)
R117	1-216-121-00	s METAL, CHIP	1.0M 5% 1/10W (2012)
R118	1-211-998-11	s METAL, CHIP	4.7K 0.1% 1/16W (1608)
R119	1-211-998-11	s METAL, CHIP	4.7K 0.1% 1/16W (1608)
R120	1-211-998-11	s METAL, CHIP	4.7K 0.1% 1/16W (1608)
R121	1-211-998-11	s METAL, CHIP	4.7K 0.1% 1/16W (1608)
R122	1-220-636-11	s METAL, CHIP	2.7K 0.1% 1/10W (2012)
R123	1-220-636-11	s METAL, CHIP	2.7K 0.1% 1/10W (2012)
R124	1-216-637-11	s METAL, CHIP	270 0.5% 1/10W (2012)
R125	1-216-664-11	s METAL, CHIP	3.6K 0.5% 1/10W (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R126	1-216-641-11	s METAL, CHIP 390 0.5% 1/10W (2012)
R127	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R128	1-216-668-11	s METAL, CHIP 5.1K 0.5% 1/10W (2012)
R129	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R130	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R131	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R132	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R133	1-216-668-11	s METAL, CHIP 5.1K 0.5% 1/10W (2012)
R134	1-216-615-11	s METAL, CHIP 33 0.5% 1/10W (2012)
R135	1-216-101-00	s METAL, CHIP 150K 5% 1/10W (2012)
R136	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R137	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R138	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R139	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R140	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R141	1-216-063-00	s METAL, CHIP 3.9K 5% 1/10W (2012)
R142	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R143	1-216-095-00	s METAL, CHIP 82K 5% 1/10W (2012)
R144	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R145	1-216-059-00	s METAL, CHIP 2.7K 5% 1/10W (2012)
R146	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R147	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R148	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R149	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R150	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R151	1-216-650-11	s METAL, CHIP 910 0.5% 1/10W (2012)
R152	1-216-650-11	s METAL, CHIP 910 0.5% 1/10W (2012)
R153	1-216-664-11	s METAL, CHIP 3.6K 0.5% 1/10W (2012)
R154	1-216-629-11	s METAL, CHIP 120 0.5% 1/10W (2012)
R155	1-216-669-11	s METAL, CHIP 5.6K 0.5% 1/10W (2012)
R156	1-216-615-11	s METAL, CHIP 33 0.5% 1/10W (2012)
R157	1-216-674-11	s METAL, CHIP 9.1K 0.5% 1/10W (2012)
R158	1-216-670-11	s METAL, CHIP 6.2K 0.5% 1/10W (2012)
R159	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R160	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R161	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R165	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R166	1-216-295-00	s METAL, CHIP 0 (2012)
R167	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R168	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R169	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R170	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R171	1-216-295-00	s METAL, CHIP 0 (2012)
R172	1-216-015-00	s METAL, CHIP 39 5% 1/10W (2012)
R173	1-216-015-00	s METAL, CHIP 39 5% 1/10W (2012)
R174	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R189	1-216-295-00	s METAL, CHIP 0 (2012)
R192	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R193	1-218-760-11	s METAL, CHIP 220K 0.5% 1/10W (2012)
R200	1-220-154-11	s METAL, CHIP 100K 0.1% 1/16W (2012)
R201	1-220-154-11	s METAL, CHIP 100K 0.1% 1/16W (2012)
R202	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R203	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R204	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R205	1-216-658-11	s METAL, CHIP 2.0K 0.5% 1/10W (2012)
R206	1-216-657-11	s METAL, CHIP 1.8K 0.5% 1/10W (2012)
R207	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R208	1-216-658-11	s METAL, CHIP 2.0K 0.5% 1/10W (2012)
R209	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R210	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R211	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R212	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R213	1-216-611-11	s METAL, CHIP 22 0.5% 1/10W (2012)
R214	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R215	1-216-641-11	s METAL, CHIP 390 0.5% 1/10W (2012)
R216	1-216-668-11	s METAL, CHIP 5.1K 0.5% 1/10W (2012)
R217	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R218	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R219	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R220	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R221	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R222	1-220-636-11	s METAL, CHIP 2.7K 0.1% 1/10W (2012)
R223	1-220-636-11	s METAL, CHIP 2.7K 0.1% 1/10W (2012)
R224	1-216-637-11	s METAL, CHIP 270 0.5% 1/10W (2012)
R225	1-216-664-11	s METAL, CHIP 3.6K 0.5% 1/10W (2012)
R226	1-216-641-11	s METAL, CHIP 390 0.5% 1/10W (2012)
R227	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R228	1-216-668-11	s METAL, CHIP 5.1K 0.5% 1/10W (2012)
R229	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R230	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R231	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R232	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R233	1-216-668-11	s METAL, CHIP 5.1K 0.5% 1/10W (2012)
R234	1-216-615-11	s METAL, CHIP 33 0.5% 1/10W (2012)
R235	1-216-101-00	s METAL, CHIP 150K 5% 1/10W (2012)
R236	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R237	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R238	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R239	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R240	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R241	1-216-063-00	s METAL, CHIP 3.9K 5% 1/10W (2012)
R242	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R243	1-216-095-00	s METAL, CHIP 82K 5% 1/10W (2012)
R244	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R245	1-216-059-00	s METAL, CHIP 2.7K 5% 1/10W (2012)
R246	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R247	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R248	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R249	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R250	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R251	1-216-650-11	s METAL, CHIP 910 0.5% 1/10W (2012)
R252	1-216-650-11	s METAL, CHIP 910 0.5% 1/10W (2012)
R253	1-216-664-11	s METAL, CHIP 3.6K 0.5% 1/10W (2012)
R254	1-216-629-11	s METAL, CHIP 120 0.5% 1/10W (2012)
R255	1-216-669-11	s METAL, CHIP 5.6K 0.5% 1/10W (2012)
R256	1-216-615-11	s METAL, CHIP 33 0.5% 1/10W (2012)
R257	1-216-674-11	s METAL, CHIP 9.1K 0.5% 1/10W (2012)
R258	1-216-670-11	s METAL, CHIP 6.2K 0.5% 1/10W (2012)
R259	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R260	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R261	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R265	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R266	1-216-295-00	s METAL, CHIP 0 (2012)
R267	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R268	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R269	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R270	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R271	1-216-295-00	s METAL, CHIP 0 (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R272	1-216-015-00	s METAL, CHIP 39 5% 1/10W (2012)
R273	1-216-015-00	s METAL, CHIP 39 5% 1/10W (2012)
R289	1-216-295-00	s METAL, CHIP 0 (2012)
R292	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R293	1-218-760-11	s METAL, CHIP 220K 0.5% 1/10W (2012)
R300	1-220-154-11	s METAL, CHIP 100K 0.1% 1/16W (2012)
R301	1-220-154-11	s METAL, CHIP 100K 0.1% 1/16W (2012)
R302	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R303	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R304	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R305	1-216-658-11	s METAL, CHIP 2.0K 0.5% 1/10W (2012)
R306	1-216-657-11	s METAL, CHIP 1.8K 0.5% 1/10W (2012)
R307	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R308	1-216-658-11	s METAL, CHIP 2.0K 0.5% 1/10W (2012)
R309	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R310	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R311	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R312	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R313	1-216-611-11	s METAL, CHIP 22 0.5% 1/10W (2012)
R314	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R315	1-216-641-11	s METAL, CHIP 390 0.5% 1/10W (2012)
R316	1-216-668-11	s METAL, CHIP 5.1K 0.5% 1/10W (2012)
R317	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R318	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R319	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R320	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R321	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R322	1-220-636-11	s METAL, CHIP 2.7K 0.1% 1/10W (2012)
R323	1-220-636-11	s METAL, CHIP 2.7K 0.1% 1/10W (2012)
R324	1-216-637-11	s METAL, CHIP 270 0.5% 1/10W (2012)
R325	1-216-664-11	s METAL, CHIP 3.6K 0.5% 1/10W (2012)
R326	1-216-641-11	s METAL, CHIP 390 0.5% 1/10W (2012)
R327	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R328	1-216-668-11	s METAL, CHIP 5.1K 0.5% 1/10W (2012)
R329	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R330	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R331	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R332	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R333	1-216-668-11	s METAL, CHIP 5.1K 0.5% 1/10W (2012)
R334	1-216-615-11	s METAL, CHIP 33 0.5% 1/10W (2012)
R335	1-216-101-00	s METAL, CHIP 150K 5% 1/10W (2012)
R336	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R337	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R338	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R339	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R340	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R341	1-216-063-00	s METAL, CHIP 3.9K 5% 1/10W (2012)
R342	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R343	1-216-095-00	s METAL, CHIP 82K 5% 1/10W (2012)
R344	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R345	1-216-059-00	s METAL, CHIP 2.7K 5% 1/10W (2012)
R346	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R347	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R348	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R349	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R350	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R351	1-216-650-11	s METAL, CHIP 910 0.5% 1/10W (2012)
R352	1-216-650-11	s METAL, CHIP 910 0.5% 1/10W (2012)
R353	1-216-664-11	s METAL, CHIP 3.6K 0.5% 1/10W (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R354	1-216-629-11	s METAL, CHIP 120 0.5% 1/10W (2012)
R355	1-216-669-11	s METAL, CHIP 5.6K 0.5% 1/10W (2012)
R356	1-216-615-11	s METAL, CHIP 33 0.5% 1/10W (2012)
R357	1-216-674-11	s METAL, CHIP 9.1K 0.5% 1/10W (2012)
R358	1-216-670-11	s METAL, CHIP 6.2K 0.5% 1/10W (2012)
R359	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R360	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R361	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R365	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R366	1-216-295-00	s METAL, CHIP 0 (2012)
R367	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R368	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R369	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R370	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R371	1-216-295-00	s METAL, CHIP 0 (2012)
R372	1-216-015-00	s METAL, CHIP 39 5% 1/10W (2012)
R373	1-216-015-00	s METAL, CHIP 39 5% 1/10W (2012)
R374	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R389	1-216-295-00	s METAL, CHIP 0 (2012)
R392	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R393	1-218-760-11	s METAL, CHIP 220K 0.5% 1/10W (2012)
R400	1-220-154-11	s METAL, CHIP 100K 0.1% 1/16W (2012)
R401	1-220-154-11	s METAL, CHIP 100K 0.1% 1/16W (2012)
R402	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R403	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R404	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R405	1-216-658-11	s METAL, CHIP 2.0K 0.5% 1/10W (2012)
R406	1-216-657-11	s METAL, CHIP 1.8K 0.5% 1/10W (2012)
R407	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R408	1-216-658-11	s METAL, CHIP 2.0K 0.5% 1/10W (2012)
R409	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R410	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R411	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R412	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R413	1-216-611-11	s METAL, CHIP 22 0.5% 1/10W (2012)
R414	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R415	1-216-641-11	s METAL, CHIP 390 0.5% 1/10W (2012)
R416	1-216-668-11	s METAL, CHIP 5.1K 0.5% 1/10W (2012)
R417	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R418	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R419	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R420	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R421	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R422	1-220-636-11	s METAL, CHIP 2.7K 0.1% 1/10W (2012)
R423	1-220-636-11	s METAL, CHIP 2.7K 0.1% 1/10W (2012)
R424	1-216-637-11	s METAL, CHIP 270 0.5% 1/10W (2012)
R425	1-216-664-11	s METAL, CHIP 3.6K 0.5% 1/10W (2012)
R426	1-216-641-11	s METAL, CHIP 390 0.5% 1/10W (2012)
R427	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R428	1-216-668-11	s METAL, CHIP 5.1K 0.5% 1/10W (2012)
R429	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R430	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R431	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R432	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R433	1-216-668-11	s METAL, CHIP 5.1K 0.5% 1/10W (2012)
R434	1-216-615-11	s METAL, CHIP 33 0.5% 1/10W (2012)
R435	1-216-101-00	s METAL, CHIP 150K 5% 1/10W (2012)
R436	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R437	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R438	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R439	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R440	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R441	1-216-063-00	s METAL, CHIP 3.9K 5% 1/10W (2012)
R442	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R443	1-216-095-00	s METAL, CHIP 82K 5% 1/10W (2012)
R444	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R445	1-216-059-00	s METAL, CHIP 2.7K 5% 1/10W (2012)
R446	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R447	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R448	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R449	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R450	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R451	1-216-650-11	s METAL, CHIP 910 0.5% 1/10W (2012)
R452	1-216-650-11	s METAL, CHIP 910 0.5% 1/10W (2012)
R453	1-216-664-11	s METAL, CHIP 3.6K 0.5% 1/10W (2012)
R454	1-216-629-11	s METAL, CHIP 120 0.5% 1/10W (2012)
R455	1-216-669-11	s METAL, CHIP 5.6K 0.5% 1/10W (2012)
R456	1-216-615-11	s METAL, CHIP 33 0.5% 1/10W (2012)
R457	1-216-674-11	s METAL, CHIP 9.1K 0.5% 1/10W (2012)
R458	1-216-670-11	s METAL, CHIP 6.2K 0.5% 1/10W (2012)
R459	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R460	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R461	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R465	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R466	1-216-295-00	s METAL, CHIP 0 (2012)
R467	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R468	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R469	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R470	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R471	1-216-295-00	s METAL, CHIP 0 (2012)
R472	1-216-015-00	s METAL, CHIP 39 5% 1/10W (2012)
R473	1-216-015-00	s METAL, CHIP 39 5% 1/10W (2012)
R489	1-216-295-00	s METAL, CHIP 0 (2012)
R492	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R493	1-218-760-11	s METAL, CHIP 220K 0.5% 1/10W (2012)
R500	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R501	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W (2012)
R503	1-216-295-00	s METAL, CHIP 0 (2012)
R504	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R505	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R506	1-216-634-11	s METAL, CHIP 200 0.5% 1/10W (2012)
R507	1-216-674-11	s METAL, CHIP 9.1K 0.5% 1/10W (2012)
R508	1-216-645-11	s METAL, CHIP 560 0.5% 1/10W (2012)
R509	1-216-676-11	s METAL, CHIP 11K 0.5% 1/10W (2012)
R510	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R511	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R512	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R513	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R514	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R515	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R516	1-216-095-00	s METAL, CHIP 82K 5% 1/10W (2012)
R517	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R518	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R519	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R520	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R521	1-216-063-00	s METAL, CHIP 3.9K 5% 1/10W (2012)
R522	1-216-059-00	s METAL, CHIP 2.7K 5% 1/10W (2012)
R523	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R524	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R525	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R526	1-216-641-11	s METAL, CHIP 390 0.5% 1/10W (2012)
R527	1-216-677-11	s METAL, CHIP 12K 0.5% 1/10W (2012)
R528	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W (2012)
R529	1-216-673-11	s METAL, CHIP 8.2K 0.5% 1/10W (2012)
R530	1-216-648-11	s METAL, CHIP 750 0.5% 1/10W (2012)
R531	1-216-652-11	s METAL, CHIP 1.1K 0.5% 1/10W (2012)
R532	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R533	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R534	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R535	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R536	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R537	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R538	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R539	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R540	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R541	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R542	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R543	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R544	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R545	1-216-037-00	s METAL, CHIP 330 5% 1/10W (2012)
R546	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R547	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R548	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R549	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R550	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R551	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R552	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R553	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R554	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R555	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R556	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R557	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R558	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R559	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R560	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R561	*d 1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
	*c 1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R562	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R563	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R564	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R565	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R566	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R567	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R568	1-216-295-00	s METAL, CHIP 0 (2012)
R569	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R570	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R600	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R601	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W (2012)
R603	1-216-295-00	s METAL, CHIP 0 (2012)
R604	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R605	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R606	1-216-634-11	s METAL, CHIP 200 0.5% 1/10W (2012)
R607	1-216-674-11	s METAL, CHIP 9.1K 0.5% 1/10W (2012)
R608	1-216-645-11	s METAL, CHIP 560 0.5% 1/10W (2012)
R609	1-216-676-11	s METAL, CHIP 11K 0.5% 1/10W (2012)
R610	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R611	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R612	1-216-679-11	s	METAL, CHIP 15K 0.5% 1/10W (2012)
R613	1-216-679-11	s	METAL, CHIP 15K 0.5% 1/10W (2012)
R614	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R615	1-216-659-11	s	METAL, CHIP 2.2K 0.5% 1/10W (2012)
R616	1-216-095-00	s	METAL, CHIP 82K 5% 1/10W (2012)
R617	1-216-121-00	s	METAL, CHIP 1.0M 5% 1/10W (2012)
R618	1-216-081-00	s	METAL, CHIP 22K 5% 1/10W (2012)
R619	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R620	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R621	1-216-063-00	s	METAL, CHIP 3.9K 5% 1/10W (2012)
R622	1-216-059-00	s	METAL, CHIP 2.7K 5% 1/10W (2012)
R623	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R624	1-216-679-11	s	METAL, CHIP 15K 0.5% 1/10W (2012)
R625	1-216-682-11	s	METAL, CHIP 20K 0.5% 1/10W (2012)
R626	1-216-641-11	s	METAL, CHIP 390 0.5% 1/10W (2012)
R627	1-216-677-11	s	METAL, CHIP 12K 0.5% 1/10W (2012)
R628	1-216-646-11	s	METAL, CHIP 620 0.5% 1/10W (2012)
R629	1-216-673-11	s	METAL, CHIP 8.2K 0.5% 1/10W (2012)
R630	1-216-648-11	s	METAL, CHIP 750 0.5% 1/10W (2012)
R631	1-216-652-11	s	METAL, CHIP 1.1K 0.5% 1/10W (2012)
R632	1-216-631-11	s	METAL, CHIP 150 0.5% 1/10W (2012)
R633	1-216-121-00	s	METAL, CHIP 1.0M 5% 1/10W (2012)
R634	1-211-998-11	s	METAL, CHIP 4.7K 0.1% 1/16W (1608)
R635	1-211-998-11	s	METAL, CHIP 4.7K 0.1% 1/16W (1608)
R636	1-218-367-11	s	METAL, CHIP 10K 0.1% 1/16W (2012)
R637	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R638	1-216-699-11	s	METAL, CHIP 100K 0.5% 1/10W (2012)
R639	1-219-493-11	s	METAL, CHIP 22 0.5% 1/4W (3225)
R640	1-219-493-11	s	METAL, CHIP 22 0.5% 1/4W (3225)
R641	1-218-367-11	s	METAL, CHIP 10K 0.1% 1/16W (2012)
R642	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W (2012)
R643	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R644	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R645	1-216-037-00	s	METAL, CHIP 330 5% 1/10W (2012)
R646	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R647	1-218-367-11	s	METAL, CHIP 10K 0.1% 1/16W (2012)
R648	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W (2012)
R649	1-218-367-11	s	METAL, CHIP 10K 0.1% 1/16W (2012)
R650	1-218-367-11	s	METAL, CHIP 10K 0.1% 1/16W (2012)
R651	1-211-998-11	s	METAL, CHIP 4.7K 0.1% 1/16W (1608)
R652	1-211-998-11	s	METAL, CHIP 4.7K 0.1% 1/16W (1608)
R653	1-218-367-11	s	METAL, CHIP 10K 0.1% 1/16W (2012)
R654	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R655	1-216-699-11	s	METAL, CHIP 100K 0.5% 1/10W (2012)
R656	1-219-493-11	s	METAL, CHIP 22 0.5% 1/4W (3225)
R657	1-219-493-11	s	METAL, CHIP 22 0.5% 1/4W (3225)
R658	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R659	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R660	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R661	*d 1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
	*c 1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R700	1-216-667-11	s	METAL, CHIP 4.7K 0.5% 1/10W (2012)
R701	1-216-638-11	s	METAL, CHIP 300 0.5% 1/10W (2012)
R703	1-216-295-00	s	METAL, CHIP 0 (2012)
R704	1-216-683-11	s	METAL, CHIP 22K 0.5% 1/10W (2012)
R705	1-216-679-11	s	METAL, CHIP 15K 0.5% 1/10W (2012)
R706	1-216-634-11	s	METAL, CHIP 200 0.5% 1/10W (2012)
R707	1-216-674-11	s	METAL, CHIP 9.1K 0.5% 1/10W (2012)
R708	1-216-645-11	s	METAL, CHIP 560 0.5% 1/10W (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R709	1-216-676-11	s	METAL, CHIP 11K 0.5% 1/10W (2012)
R710	1-216-655-11	s	METAL, CHIP 1.5K 0.5% 1/10W (2012)
R711	1-216-655-11	s	METAL, CHIP 1.5K 0.5% 1/10W (2012)
R712	1-216-679-11	s	METAL, CHIP 15K 0.5% 1/10W (2012)
R713	1-216-679-11	s	METAL, CHIP 15K 0.5% 1/10W (2012)
R714	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R715	1-216-659-11	s	METAL, CHIP 2.2K 0.5% 1/10W (2012)
R716	1-216-095-00	s	METAL, CHIP 82K 5% 1/10W (2012)
R717	1-216-121-00	s	METAL, CHIP 1.0M 5% 1/10W (2012)
R718	1-216-081-00	s	METAL, CHIP 22K 5% 1/10W (2012)
R719	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R720	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R721	1-216-063-00	s	METAL, CHIP 3.9K 5% 1/10W (2012)
R722	1-216-059-00	s	METAL, CHIP 2.7K 5% 1/10W (2012)
R723	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R724	1-216-679-11	s	METAL, CHIP 15K 0.5% 1/10W (2012)
R725	1-216-682-11	s	METAL, CHIP 20K 0.5% 1/10W (2012)
R726	1-216-641-11	s	METAL, CHIP 390 0.5% 1/10W (2012)
R727	1-216-677-11	s	METAL, CHIP 12K 0.5% 1/10W (2012)
R728	1-216-646-11	s	METAL, CHIP 620 0.5% 1/10W (2012)
R729	1-216-673-11	s	METAL, CHIP 8.2K 0.5% 1/10W (2012)
R730	1-216-648-11	s	METAL, CHIP 750 0.5% 1/10W (2012)
R731	1-216-652-11	s	METAL, CHIP 1.1K 0.5% 1/10W (2012)
R732	1-216-631-11	s	METAL, CHIP 150 0.5% 1/10W (2012)
R733	1-216-121-00	s	METAL, CHIP 1.0M 5% 1/10W (2012)
R734	1-211-998-11	s	METAL, CHIP 4.7K 0.1% 1/16W (1608)
R735	1-211-998-11	s	METAL, CHIP 4.7K 0.1% 1/16W (1608)
R736	1-218-367-11	s	METAL, CHIP 10K 0.1% 1/16W (2012)
R737	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R738	1-216-699-11	s	METAL, CHIP 100K 0.5% 1/10W (2012)
R739	1-219-493-11	s	METAL, CHIP 22 0.5% 1/4W (3225)
R740	1-219-493-11	s	METAL, CHIP 22 0.5% 1/4W (3225)
R741	1-218-367-11	s	METAL, CHIP 10K 0.1% 1/16W (2012)
R742	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W (2012)
R743	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R744	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R745	1-216-037-00	s	METAL, CHIP 330 5% 1/10W (2012)
R746	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R747	1-218-367-11	s	METAL, CHIP 10K 0.1% 1/16W (2012)
R748	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W (2012)
R749	1-218-367-11	s	METAL, CHIP 10K 0.1% 1/16W (2012)
R750	1-218-367-11	s	METAL, CHIP 10K 0.1% 1/16W (2012)
R751	1-211-998-11	s	METAL, CHIP 4.7K 0.1% 1/16W (1608)
R752	1-211-998-11	s	METAL, CHIP 4.7K 0.1% 1/16W (1608)
R753	1-218-367-11	s	METAL, CHIP 10K 0.1% 1/16W (2012)
R754	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R755	1-216-699-11	s	METAL, CHIP 100K 0.5% 1/10W (2012)
R756	1-219-493-11	s	METAL, CHIP 22 0.5% 1/4W (3225)
R757	1-219-493-11	s	METAL, CHIP 22 0.5% 1/4W (3225)
R758	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R759	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R760	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R761	*d 1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
	*c 1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R762	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R763	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R764	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R765	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R766	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R767	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R768	1-216-295-00	s METAL, CHIP 0 (2012)
R769	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R770	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R800	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R801	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W (2012)
R803	1-216-295-00	s METAL, CHIP 0 (2012)
R804	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R805	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R806	1-216-634-11	s METAL, CHIP 200 0.5% 1/10W (2012)
R807	1-216-674-11	s METAL, CHIP 9.1K 0.5% 1/10W (2012)
R808	1-216-645-11	s METAL, CHIP 560 0.5% 1/10W (2012)
R809	1-216-676-11	s METAL, CHIP 11K 0.5% 1/10W (2012)
R810	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R811	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R812	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R813	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R814	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R815	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R816	1-216-095-00	s METAL, CHIP 82K 5% 1/10W (2012)
R817	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R818	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R819	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R820	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R821	1-216-063-00	s METAL, CHIP 3.9K 5% 1/10W (2012)
R822	1-216-059-00	s METAL, CHIP 2.7K 5% 1/10W (2012)
R823	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R824	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R825	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R826	1-216-641-11	s METAL, CHIP 390 0.5% 1/10W (2012)
R827	1-216-677-11	s METAL, CHIP 12K 0.5% 1/10W (2012)
R828	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W (2012)
R829	1-216-673-11	s METAL, CHIP 8.2K 0.5% 1/10W (2012)
R830	1-216-648-11	s METAL, CHIP 750 0.5% 1/10W (2012)
R831	1-216-652-11	s METAL, CHIP 1.1K 0.5% 1/10W (2012)
R832	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R833	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R834	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R835	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R836	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R837	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R838	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R839	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R840	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R841	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R842	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R843	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R844	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R845	1-216-037-00	s METAL, CHIP 330 5% 1/10W (2012)
R846	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R847	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R848	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R849	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R850	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R851	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R852	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R853	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R854	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R855	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R856	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R857	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R858	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R859	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R860	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R861	*d 1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
	*c 1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R900	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R901	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R902	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R903	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W (2012)
R904	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R905	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R906	1-216-634-11	s METAL, CHIP 200 0.5% 1/10W (2012)
R907	1-216-674-11	s METAL, CHIP 9.1K 0.5% 1/10W (2012)
R908	1-216-645-11	s METAL, CHIP 560 0.5% 1/10W (2012)
R909	1-216-676-11	s METAL, CHIP 11K 0.5% 1/10W (2012)
R910	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R911	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R912	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R913	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R914	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R915	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R916	1-216-095-00	s METAL, CHIP 82K 5% 1/10W (2012)
R917	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R920	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R921	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R922	1-216-063-00	s METAL, CHIP 3.9K 5% 1/10W (2012)
R923	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R925	1-216-295-00	s METAL, CHIP 0 (2012)
R929	1-216-295-00	s METAL, CHIP 0 (2012)
R931	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R932	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R933	1-216-677-11	s METAL, CHIP 12K 0.5% 1/10W (2012)
R934	1-216-673-11	s METAL, CHIP 8.2K 0.5% 1/10W (2012)
R935	1-216-652-11	s METAL, CHIP 1.1K 0.5% 1/10W (2012)
R936	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R937	1-216-641-11	s METAL, CHIP 390 0.5% 1/10W (2012)
R938	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W (2012)
R939	1-216-648-11	s METAL, CHIP 750 0.5% 1/10W (2012)
R940	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R941	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R942	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R943	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R944	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R945	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R946	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R947	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R948	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R949	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R950	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R951	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R952	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R953	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R954	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R955	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R956	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R957	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R958	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R959	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R960	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R961	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R962	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R963	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R964	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R965	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R966	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R967	1-216-037-00	s METAL, CHIP 330 5% 1/10W (2012)
R968	*d 1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
	*c 1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R975	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R976	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R977	1-216-295-00	s METAL, CHIP 0 (2012)
R978	1-216-295-00	s METAL, CHIP 0 (2012)
R979	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R980	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1000	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1001	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1002	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R1003	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W (2012)
R1004	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R1005	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R1006	1-216-634-11	s METAL, CHIP 200 0.5% 1/10W (2012)
R1007	1-216-674-11	s METAL, CHIP 9.1K 0.5% 1/10W (2012)
R1008	1-216-645-11	s METAL, CHIP 560 0.5% 1/10W (2012)
R1009	1-216-676-11	s METAL, CHIP 11K 0.5% 1/10W (2012)
R1010	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R1011	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R1012	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R1013	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R1014	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1015	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R1016	1-216-095-00	s METAL, CHIP 82K 5% 1/10W (2012)
R1017	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R1020	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R1021	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R1022	1-216-063-00	s METAL, CHIP 3.9K 5% 1/10W (2012)
R1023	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1025	1-216-295-00	s METAL, CHIP 0 (2012)
R1029	1-216-295-00	s METAL, CHIP 0 (2012)
R1031	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R1032	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R1033	1-216-677-11	s METAL, CHIP 12K 0.5% 1/10W (2012)
R1034	1-216-673-11	s METAL, CHIP 8.2K 0.5% 1/10W (2012)
R1035	1-216-652-11	s METAL, CHIP 1.1K 0.5% 1/10W (2012)
R1036	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R1037	1-216-641-11	s METAL, CHIP 390 0.5% 1/10W (2012)
R1038	1-216-646-11	s METAL, CHIP 620 0.5% 1/10W (2012)
R1039	1-216-648-11	s METAL, CHIP 750 0.5% 1/10W (2012)
R1040	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R1041	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R1042	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R1043	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R1044	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R1045	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R1046	1-211-998-11	s METAL, CHIP 4.7K 0.1% 1/16W (1608)
R1047	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R1048	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1049	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1050	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1051	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R1052	1-218-367-11	s METAL, CHIP 10K 0.1% 1/16W (2012)
R1053	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R1054	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1055	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R1056	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1057	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R1058	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R1059	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1060	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1061	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R1062	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R1063	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1064	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R1065	1-219-493-11	s METAL, CHIP 22 0.5% 1/4W (3225)
R1066	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1067	1-216-037-00	s METAL, CHIP 330 5% 1/10W (2012)
R1068	*d 1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
	*c 1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1107	1-216-295-00	s METAL, CHIP 0 (2012)
R1108	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1109	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1110	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1111	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1112	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1113	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1114	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1115	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R1116	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1117	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1118	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1119	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1120	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1121	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1122	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1123	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1124	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1125	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1126	1-216-295-00	s METAL, CHIP 0 (2012)
R1127	1-216-295-00	s METAL, CHIP 0 (2012)
R1128	1-216-295-00	s METAL, CHIP 0 (2012)
R1129	1-216-295-00	s METAL, CHIP 0 (2012)
R1130	1-216-295-00	s METAL, CHIP 0 (2012)
R1131	1-216-295-00	s METAL, CHIP 0 (2012)
R1132	1-216-295-00	s METAL, CHIP 0 (2012)
R1133	1-216-295-00	s METAL, CHIP 0 (2012)
R1146	1-216-295-00	s METAL, CHIP 0 (2012)
R1147	1-216-295-00	s METAL, CHIP 0 (2012)
R1148	1-216-295-00	s METAL, CHIP 0 (2012)
R1149	1-216-295-00	s METAL, CHIP 0 (2012)
R1151	1-216-295-00	s METAL, CHIP 0 (2012)
R1152	1-216-295-00	s METAL, CHIP 0 (2012)
R1200	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1202	1-216-295-00	s METAL, CHIP 0 (2012)
R1203	1-216-295-00	s METAL, CHIP 0 (2012)
R1204	1-216-295-00	s METAL, CHIP 0 (2012)
R1205	1-216-295-00	s METAL, CHIP 0 (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1346	1-216-295-00	s	METAL, CHIP 0 (2012)
R1347	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R1348	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R1349	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R1350	1-216-295-00	s	METAL, CHIP 0 (2012)
R1351	1-216-295-00	s	METAL, CHIP 0 (2012)
R1352	1-216-295-00	s	METAL, CHIP 0 (2012)
R1353	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R1354	1-216-295-00	s	METAL, CHIP 0 (2012)
R1355	1-216-295-00	s	METAL, CHIP 0 (2012)
R1400	1-216-295-00	s	METAL, CHIP 0 (2012)
R1401	1-216-295-00	s	METAL, CHIP 0 (2012)
R1402	1-216-295-00	s	METAL, CHIP 0 (2012)
R1403	1-216-295-00	s	METAL, CHIP 0 (2012)
R1405	1-216-295-00	s	METAL, CHIP 0 (2012)
R1406	1-216-295-00	s	METAL, CHIP 0 (2012)
R1407	1-216-295-00	s	METAL, CHIP 0 (2012)
R1408	1-216-295-00	s	METAL, CHIP 0 (2012)
R1411	1-216-295-00	s	METAL, CHIP 0 (2012)
R1412	1-216-295-00	s	METAL, CHIP 0 (2012)
R1413	1-216-295-00	s	METAL, CHIP 0 (2012)
R1414	1-216-295-00	s	METAL, CHIP 0 (2012)
R1415	1-216-295-00	s	METAL, CHIP 0 (2012)
R1416	1-216-295-00	s	METAL, CHIP 0 (2012)
R1417	1-216-295-00	s	METAL, CHIP 0 (2012)
R1418	1-216-295-00	s	METAL, CHIP 0 (2012)
R1419	1-216-295-00	s	METAL, CHIP 0 (2012)
R1420	1-216-295-00	s	METAL, CHIP 0 (2012)
R1421	1-216-295-00	s	METAL, CHIP 0 (2012)
R1422	1-216-295-00	s	METAL, CHIP 0 (2012)
R1423	1-216-295-00	s	METAL, CHIP 0 (2012)
R1424	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1425	1-216-295-00	s	METAL, CHIP 0 (2012)
R1428	1-216-295-00	s	METAL, CHIP 0 (2012)
R1429	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1430	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1431	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1432	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1433	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1434	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1435	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1436	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1437	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1438	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1439	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1440	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1441	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1442	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1443	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1444	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1446	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1447	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1448	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1449	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1450	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1451	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1452	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1453	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1454	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1455	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1456	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1457	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1458	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1459	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1460	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1461	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1462	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1463	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1464	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1465	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1466	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1467	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1468	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1469	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1470	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1471	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1472	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1473	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1474	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1475	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1476	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1477	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R1478	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R1479	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R1480	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R1481	1-216-642-11	s METAL, CHIP 430 0.5% 1/10W (2012)
R1482	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R1483	1-216-295-00	s METAL, CHIP 0 (2012)
R1484	1-216-295-00	s METAL, CHIP 0 (2012)
R1486	1-216-658-11	s METAL, CHIP 2.0K 0.5% 1/10W (2012)
R1489	1-216-295-00	s METAL, CHIP 0 (2012)
R1491	1-216-295-00	s METAL, CHIP 0 (2012)
R1492	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1493	1-216-295-00	s METAL, CHIP 0 (2012)
R1494	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1495	1-216-295-00	s METAL, CHIP 0 (2012)
R1496	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1497	1-216-698-11	s METAL, CHIP 91K 0.5% 1/10W (2012)
R1498	1-216-693-11	s METAL, CHIP 56K 0.5% 1/10W (2012)
R1500	1-216-295-00	s METAL, CHIP 0 (2012)
R1502	1-216-662-11	s METAL, CHIP 3.0K 0.5% 1/10W (2012)
R1503	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1504	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R1505	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R1506	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R1507	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R1508	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R1509	*d 1-216-053-00	s METAL, CHIP 1.5K 5% 1/10W (2012)
	*c 1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R1510	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1511	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1512	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1513	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1514	1-216-295-00	s METAL, CHIP 0 (2012)
R1522	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1523	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1524	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1525	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)

(APR-40 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1526	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1527	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
RB1100	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB1101	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB1201	1-239-306-11	s RES, NETWORK, CHIP 10Kx8 (6432)
RB1400	1-239-306-11	s RES, NETWORK, CHIP 10Kx8 (6432)
RB1401	1-239-306-11	s RES, NETWORK, CHIP 10Kx8 (6432)
RB1402	1-239-306-11	s RES, NETWORK, CHIP 10Kx8 (6432)
RV100	1-237-036-11	s RES, ADJ, CERMET, CHIP 10K
RV101	1-237-033-11	s RES, ADJ, CERMET, CHIP 1K
RV102	1-237-037-11	s RES, ADJ, CERMET, CHIP 20K
RV103	1-237-037-11	s RES, ADJ, CERMET, CHIP 20K
RV200	1-237-036-11	s RES, ADJ, CERMET, CHIP 10K
RV201	1-237-033-11	s RES, ADJ, CERMET, CHIP 1K
RV202	1-237-037-11	s RES, ADJ, CERMET, CHIP 20K
RV203	1-237-037-11	s RES, ADJ, CERMET, CHIP 20K
RV300	1-237-036-11	s RES, ADJ, CERMET, CHIP 10K
RV301	1-237-033-11	s RES, ADJ, CERMET, CHIP 1K
RV302	1-237-037-11	s RES, ADJ, CERMET, CHIP 20K
RV303	1-237-037-11	s RES, ADJ, CERMET, CHIP 20K
RV400	1-237-036-11	s RES, ADJ, CERMET, CHIP 10K
RV401	1-237-033-11	s RES, ADJ, CERMET, CHIP 1K
RV402	1-237-037-11	s RES, ADJ, CERMET, CHIP 20K
RV403	1-237-037-11	s RES, ADJ, CERMET, CHIP 20K
RV500	1-237-036-11	s RES, ADJ, CERMET, CHIP 10K
RV600	1-237-036-11	s RES, ADJ, CERMET, CHIP 10K
RV700	1-237-036-11	s RES, ADJ, CERMET, CHIP 10K
RV800	1-237-036-11	s RES, ADJ, CERMET, CHIP 10K
RV900	1-237-036-11	s RES, ADJ, CERMET, CHIP 10K
RV1000	1-237-036-11	s RES, ADJ, CERMET, CHIP 10K
RY100	1-515-716-11	s RELAY TQ2-5V
RY200	1-515-716-11	s RELAY TQ2-5V
RY300	1-515-716-11	s RELAY TQ2-5V
RY400	1-515-716-11	s RELAY TQ2-5V
RY500	1-515-716-11	s RELAY TQ2-5V
RY600	1-515-716-11	s RELAY TQ2-5V
RY700	1-515-716-11	s RELAY TQ2-5V
RY800	1-515-716-11	s RELAY TQ2-5V
RY900	1-515-716-11	s RELAY TQ2-5V
RY1000	1-515-716-11	s RELAY TQ2-5V
TH100	1-810-106-11	s THERMISTOR, POSITIVE, CHIP
TH200	1-810-106-11	s THERMISTOR, POSITIVE, CHIP
TH300	1-810-106-11	s THERMISTOR, POSITIVE, CHIP
TH400	1-810-106-11	s THERMISTOR, POSITIVE, CHIP
TH1400	1-810-106-11	s THERMISTOR, POSITIVE, CHIP
X1300	1-760-527-11	s CRYSTAL 32 MHz

CCM-15 BOARD for Reel shift motor

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-648-570-11	o PRINTED WIRING BOARD, CCM-15
CN920	1-506-468-11	s CONNECTOR, 3P, MALE
M002	1-698-152-11	s MOTOR, DC (SVD-1449)

CCM-15 BOARD for Threading motor

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-648-570-11	o PRINTED WIRING BOARD, CCM-15
CN920	1-506-468-11	s CONNECTOR, 3P, MALE
M003	1-698-152-11	s MOTOR, DC (SVD-1449)

CL-29 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8276-626-B	o MOUNTED CIRCUIT BOARD, CL-29
1pc	3-171-424-02	o HOLDER, SENSOR
C1	1-161-051-00	s CERAMIC 0.01uF 10% 50V
CN930	1-564-011-11	o CONNECTOR, 12P, MALE
CN931	1-564-001-11	o CONNECTOR, 2P, MALE
CN933	1-573-599-11	s CONNECTOR, FPC/FFC 5P
CN935	1-564-001-11	o CONNECTOR, 2P, MALE
D1	8-719-938-07	s LED GL480, INFRARED
D2	8-719-938-07	s LED GL480, INFRARED
Q1	8-729-903-81	s PHOTO-TRANSISTOR PT480
Q2	8-729-903-81	s PHOTO-TRANSISTOR PT480
R1	1-247-825-31	s CARBON 560 5% 1/4W
R2	1-247-825-31	s CARBON 560 5% 1/4W

CP-278 BOARD for E

Ref. No. or Q'ty	Part No.	SP Description
*1: Board No. suffix -11 *2: Board No. suffix -12		
1pc	A-8319-247-A	o MOUNTED CIRCUIT BOARD, CP-278K
C100	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C101	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C130	*2 1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V (2012)
	*1 1-162-873-11	s CERAMIC 56pF 5% 50V
C131	*2 1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V (2012)
	*1 1-162-873-11	s CERAMIC 56pF 5% 50V
C200	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C201	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C230	*2 1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V (2012)
	*1 1-162-873-11	s CERAMIC 56pF 5% 50V
C231	*2 1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V (2012)
	*1 1-162-873-11	s CERAMIC 56pF 5% 50V
C300	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C301	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C330	*2 1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V (2012)
	*1 1-162-873-11	s CERAMIC 56pF 5% 50V
C331	*2 1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V (2012)
	*1 1-162-873-11	s CERAMIC 56pF 5% 50V
C400	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C401	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C430	*2 1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V (2012)
	*1 1-162-873-11	s CERAMIC 56pF 5% 50V
C431	*2 1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V (2012)
	*1 1-162-873-11	s CERAMIC 56pF 5% 50V
CN190	1-750-786-21	s CONNECTOR, DUAL XLR 3P, FEMALE
CN101	1-750-785-21	s CONNECTOR, DUAL XLR 3P, MALE
CN191	1-506-492-11	o CONNECTOR, 13P, MALE
CN192	1-506-491-11	s CONNECTOR, 12P, MALE
CN193	1-506-484-11	s CONNECTOR, 5P, MALE
CN300	1-750-786-21	s CONNECTOR, DUAL XLR 3P, FEMALE
CN301	1-750-785-21	s CONNECTOR, DUAL XLR 3P, MALE
FB100	1-543-622-11	s BEAD, FERRITE, CHIP
FB103	1-543-622-11	s BEAD, FERRITE, CHIP
FB104	1-543-622-11	s BEAD, FERRITE, CHIP
FB131	1-543-622-11	s BEAD, FERRITE, CHIP
FB133	1-543-622-11	s BEAD, FERRITE, CHIP
FB134	1-543-622-11	s BEAD, FERRITE, CHIP
FB200	1-543-622-11	s BEAD, FERRITE, CHIP
FB203	1-543-622-11	s BEAD, FERRITE, CHIP
FB231	1-543-622-11	s BEAD, FERRITE, CHIP
FB233	1-543-622-11	s BEAD, FERRITE, CHIP
FB300	1-543-622-11	s BEAD, FERRITE, CHIP
FB303	1-543-622-11	s BEAD, FERRITE, CHIP
FB304	1-543-622-11	s BEAD, FERRITE, CHIP
FB330	1-543-622-11	s BEAD, FERRITE, CHIP
FB331	1-543-622-11	s BEAD, FERRITE, CHIP
FB333	1-543-622-11	s BEAD, FERRITE, CHIP
FB334	1-543-622-11	s BEAD, FERRITE, CHIP
FB400	1-543-622-11	s BEAD, FERRITE, CHIP
FB401	1-543-622-11	s BEAD, FERRITE, CHIP
FB431	1-543-622-11	s BEAD, FERRITE, CHIP
FB433	1-543-622-11	s BEAD, FERRITE, CHIP
L100	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L101	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)

(CP-278 BOARD for E)

Ref. No. or Q'ty	Part No.	SP Description
L200	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L201	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L300	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L301	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L400	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L401	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
R104	1-215-423-00	s METAL 1.2K 1% 1/6W
R105	1-215-423-00	s METAL 1.2K 1% 1/6W
R106	1-216-295-00	s METAL, CHIP 0 (2012)
R107	1-216-295-00	s METAL, CHIP 0 (2012)
R108	1-216-295-00	s METAL, CHIP 0 (2012)
R109	1-216-295-00	s METAL, CHIP 0 (2012)
R204	1-215-423-00	s METAL 1.2K 1% 1/6W
R205	1-215-423-00	s METAL 1.2K 1% 1/6W
R206	1-216-295-00	s METAL, CHIP 0 (2012)
R207	1-216-295-00	s METAL, CHIP 0 (2012)
R208	1-216-295-00	s METAL, CHIP 0 (2012)
R209	1-216-295-00	s METAL, CHIP 0 (2012)
R304	1-215-423-00	s METAL 1.2K 1% 1/6W
R305	1-215-423-00	s METAL 1.2K 1% 1/6W
R306	1-216-295-00	s METAL, CHIP 0 (2012)
R307	1-216-295-00	s METAL, CHIP 0 (2012)
R308	1-216-295-00	s METAL, CHIP 0 (2012)
R309	1-216-295-00	s METAL, CHIP 0 (2012)
R404	1-215-423-00	s METAL 1.2K 1% 1/6W
R405	1-215-423-00	s METAL 1.2K 1% 1/6W
R406	1-216-295-00	s METAL, CHIP 0 (2012)
R407	1-216-295-00	s METAL, CHIP 0 (2012)
R408	1-216-295-00	s METAL, CHIP 0 (2012)
R409	1-216-295-00	s METAL, CHIP 0 (2012)
S100	1-572-042-11	s SWITCH, SLIDE
S200	1-572-042-11	s SWITCH, SLIDE
S300	1-572-042-11	s SWITCH, SLIDE
S400	1-572-042-11	s SWITCH, SLIDE

CP-278 BOARD for J

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8319-249-A	o MOUNTED CIRCUIT BOARD, CP-278KJ
C100	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C101	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C200	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C201	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C300	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C301	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C400	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C401	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
CN100	1-750-785-21	s CONNECTOR, DUAL XLR 3P, MALE
CN101	1-750-786-21	s CONNECTOR, DUAL XLR 3P, FEMALE
CN191	1-506-492-11	o CONNECTOR, 13P, MALE
CN192	1-506-491-11	s CONNECTOR, 12P, MALE
CN193	1-506-484-11	s CONNECTOR, 5P, MALE
CN300	1-750-785-21	s CONNECTOR, DUAL XLR 3P, MALE
CN301	1-750-786-21	s CONNECTOR, DUAL XLR 3P, FEMALE
FB101	1-543-622-11	s BEAD, FERRITE, CHIP
FB102	1-543-622-11	s BEAD, FERRITE, CHIP
FB104	1-543-622-11	s BEAD, FERRITE, CHIP
FB130	1-543-622-11	s BEAD, FERRITE, CHIP
FB131	1-543-622-11	s BEAD, FERRITE, CHIP
FB132	1-543-622-11	s BEAD, FERRITE, CHIP
FB134	1-543-622-11	s BEAD, FERRITE, CHIP
FB200	1-543-622-11	s BEAD, FERRITE, CHIP
FB201	1-543-622-11	s BEAD, FERRITE, CHIP
FB202	1-543-622-11	s BEAD, FERRITE, CHIP
FB232	1-543-622-11	s BEAD, FERRITE, CHIP
FB301	1-543-622-11	s BEAD, FERRITE, CHIP
FB302	1-543-622-11	s BEAD, FERRITE, CHIP
FB304	1-543-622-11	s BEAD, FERRITE, CHIP
FB332	1-543-622-11	s BEAD, FERRITE, CHIP
FB334	1-543-622-11	s BEAD, FERRITE, CHIP
FB401	1-543-622-11	s BEAD, FERRITE, CHIP
FB402	1-543-622-11	s BEAD, FERRITE, CHIP
FB403	1-543-622-11	s BEAD, FERRITE, CHIP
FB430	1-543-622-11	s BEAD, FERRITE, CHIP
FB432	1-543-622-11	s BEAD, FERRITE, CHIP
L100	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L101	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L200	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L201	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L300	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L301	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L400	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L401	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
R104	1-215-423-00	s METAL 1.2K 1% 1/6W
R105	1-215-423-00	s METAL 1.2K 1% 1/6W
R106	1-216-295-00	s METAL, CHIP 0 (2012)
R107	1-216-295-00	s METAL, CHIP 0 (2012)
R108	1-216-295-00	s METAL, CHIP 0 (2012)
R109	1-216-295-00	s METAL, CHIP 0 (2012)
R204	1-215-423-00	s METAL 1.2K 1% 1/6W
R205	1-215-423-00	s METAL 1.2K 1% 1/6W
R206	1-216-295-00	s METAL, CHIP 0 (2012)
R207	1-216-295-00	s METAL, CHIP 0 (2012)
R208	1-216-295-00	s METAL, CHIP 0 (2012)

(CP-278 BOARD for J)

Ref. No. or Q'ty	Part No.	SP Description
R209	1-216-295-00	s METAL, CHIP 0 (2012)
R304	1-215-423-00	s METAL 1.2K 1% 1/6W
R305	1-215-423-00	s METAL 1.2K 1% 1/6W
R306	1-216-295-00	s METAL, CHIP 0 (2012)
R307	1-216-295-00	s METAL, CHIP 0 (2012)
R308	1-216-295-00	s METAL, CHIP 0 (2012)
R309	1-216-295-00	s METAL, CHIP 0 (2012)
R404	1-215-423-00	s METAL 1.2K 1% 1/6W
R405	1-215-423-00	s METAL 1.2K 1% 1/6W
R406	1-216-295-00	s METAL, CHIP 0 (2012)
R407	1-216-295-00	s METAL, CHIP 0 (2012)
R408	1-216-295-00	s METAL, CHIP 0 (2012)
R409	1-216-295-00	s METAL, CHIP 0 (2012)
S100	1-572-042-11	s SWITCH, SLIDE
S200	1-572-042-11	s SWITCH, SLIDE
S300	1-572-042-11	s SWITCH, SLIDE
S400	1-572-042-11	s SWITCH, SLIDE

CP-301 BOARD for E

Ref. No. or Q'ty	Part No.	SP Description
*N: For DNW-A75/75		
*P: For DNW-A75P/75P		
*1: Board No. suffix -11		
*2: Board No. suffix -12		
1pc	*N A-8319-251-A	o MOUNTED CIRCUIT BOARD, CP-301K
1pc	*P A-8319-255-A	o MOUNTED CIRCUIT BOARD, CP-301KP
C100	*2 1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V (2012)
	*1 1-162-873-11	s CERAMIC 56pF 5% 50V
C101	*2 1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V (2012)
	*1 1-162-873-11	s CERAMIC 56pF 5% 50V
C200	*2 1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V (2012)
	*1 1-162-873-11	s CERAMIC 56pF 5% 50V
C201	*2 1-163-245-11	s CERAMIC, CHIP 56pF 5% 50V (2012)
	*1 1-162-873-11	s CERAMIC 56pF 5% 50V
C300	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C301	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C302	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C303	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C304	1-107-907-11	s ELECT 22uF 20% 50V
C305	1-107-907-11	s ELECT 22uF 20% 50V
C400	1-107-906-11	s ELECT 10uF 20% 50V
C401	1-107-906-11	s ELECT 10uF 20% 50V
C402	1-107-906-11	s ELECT 10uF 20% 50V
C403	1-107-906-11	s ELECT 10uF 20% 50V
C404	1-107-827-11	s FILM, CHIP 0.01uF 2% 16V (2012)
C405	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C406	1-163-222-11	s CERAMIC, CHIP 5pF 50V (2012)
C407	1-104-631-11	s ELECT 33uF 20% 16V
C408	1-104-631-11	s ELECT 33uF 20% 16V
C409	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C410	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
CN101	1-750-785-21	s CONNECTOR, DUAL XLR 3P, MALE
CN194	1-506-486-11	s CONNECTOR, 7P, MALE
CN195	1-506-485-11	s CONNECTOR, 6P, MALE
CN200	1-750-788-21	s CONNECTOR, XLR 3P, FEMALE
CN201	1-750-787-21	s CONNECTOR, XLR 3P, MALE
D300	8-719-820-41	s DIODE 1SS302
D301	8-719-820-41	s DIODE 1SS302
D400	8-719-941-23	s DIODE DA204U
FB131	1-543-622-11	s BEAD, FERRITE, CHIP
FB133	1-543-622-11	s BEAD, FERRITE, CHIP
FB231	1-543-622-11	s BEAD, FERRITE, CHIP
FB233	1-543-622-11	s BEAD, FERRITE, CHIP
FB300	1-543-622-11	s BEAD, FERRITE, CHIP
FB303	1-543-622-11	s BEAD, FERRITE, CHIP
FB304	1-543-622-11	s BEAD, FERRITE, CHIP
FB431	1-543-622-11	s BEAD, FERRITE, CHIP
FB433	1-543-622-11	s BEAD, FERRITE, CHIP
FB434	1-543-622-11	s BEAD, FERRITE, CHIP
FB534	1-543-622-11	s BEAD, FERRITE, CHIP
IC300	8-759-700-07	s IC NJM2903M
IC400	8-759-700-07	s IC NJM2903M
IC401	8-759-981-48	s IC TL082M
IC402	8-759-359-61	s IC NJM4556AM-A
IC403	8-759-700-65	s IC NJM79L05A
L300	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L301	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)

(CP-301 BOARD for E)

Ref. No. or Q'ty	Part No.	SP Description
L400	1-412-533-21	s INDUCTOR 47uH
Q400	8-729-109-44	s TRANSISTOR 2SK94
Q401	8-729-028-91	s TRANSISTOR DTA144EUA
R300	1-216-295-00	s METAL, CHIP 0 (2012)
R301	1-216-295-00	s METAL, CHIP 0 (2012)
R302	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R303	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R304	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R305	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R306	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R307	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R308	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R309	1-218-760-11	s METAL, CHIP 220K 0.5% 1/10W (2012)
R310	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R311	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R400	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R401	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R402	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R403	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R404	1-216-061-00	s METAL, CHIP 3.3K 5% 1/10W (2012)
R405	*N 1-216-678-11	s METAL, CHIP 13K 0.5% 1/10W (2012)
	*P 1-216-680-11	s METAL, CHIP 16K 0.5% 1/10W (2012)
R406	*N 1-216-657-11	s METAL, CHIP 1.8K 0.5% 1/10W (2012)
	*P 1-216-660-11	s METAL, CHIP 2.4K 0.5% 1/10W (2012)
R407	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R408	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R409	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R410	*N 1-216-676-11	s METAL, CHIP 11K 0.5% 1/10W (2012)
	*P 1-216-677-11	s METAL, CHIP 12K 0.5% 1/10W (2012)
R411	*N 1-216-672-11	s METAL, CHIP 7.5K 0.5% 1/10W (2012)
	*P 1-216-674-11	s METAL, CHIP 9.1K 0.5% 1/10W (2012)
R412	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R413	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R414	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R415	*N 1-216-686-11	s METAL, CHIP 30K 0.5% 1/10W (2012)
	*P 1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R416	*N 1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
	*P 1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R417	*N 1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
	*P 1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R418	*N 1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
	*P 1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R419	*N 1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
	*P 1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R420	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R421	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)

CP-301 BOARD for J

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8319-253-A	o MOUNTED CIRCUIT BOARD, CP-301KJ
C300	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C301	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C302	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C303	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C304	1-107-907-11	s ELECT 22uF 20% 50V
C305	1-107-907-11	s ELECT 22uF 20% 50V
C400	1-107-906-11	s ELECT 10uF 20% 50V
C401	1-107-906-11	s ELECT 10uF 20% 50V
C402	1-107-906-11	s ELECT 10uF 20% 50V
C403	1-107-906-11	s ELECT 10uF 20% 50V
C404	1-107-827-11	s FILM, CHIP 0.01uF 2% 16V (2012)
C405	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C406	1-163-222-11	s CERAMIC, CHIP 5pF 50V (2012)
C407	1-104-631-11	s ELECT 33uF 20% 16V
C408	1-104-631-11	s ELECT 33uF 20% 16V
C409	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C410	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
CN101	1-750-786-21	s CONNECTOR, DUAL XLR 3P, FEMALE
CN194	1-506-486-11	s CONNECTOR, 7P, MALE
CN195	1-506-485-11	s CONNECTOR, 6P, MALE
CN200	1-750-787-21	s CONNECTOR, XLR 3P, MALE
CN201	1-750-788-21	s CONNECTOR, XLR 3P, FEMALE
D300	8-719-820-41	s DIODE 1SS302
D301	8-719-820-41	s DIODE 1SS302
D400	8-719-941-23	s DIODE DA204U
FB130	1-543-622-11	s BEAD, FERRITE, CHIP
FB132	1-543-622-11	s BEAD, FERRITE, CHIP
FB230	1-543-622-11	s BEAD, FERRITE, CHIP
FB232	1-543-622-11	s BEAD, FERRITE, CHIP
FB301	1-543-622-11	s BEAD, FERRITE, CHIP
FB302	1-543-622-11	s BEAD, FERRITE, CHIP
FB304	1-543-622-11	s BEAD, FERRITE, CHIP
FB430	1-543-622-11	s BEAD, FERRITE, CHIP
FB432	1-543-622-11	s BEAD, FERRITE, CHIP
FB434	1-543-622-11	s BEAD, FERRITE, CHIP
FB534	1-543-622-11	s BEAD, FERRITE, CHIP
IC300	8-759-700-07	s IC NJM2903M
IC400	8-759-700-07	s IC NJM2903M
IC401	8-759-981-48	s IC TL082M
IC402	8-759-359-61	s IC NJM4556AM-A
IC403	8-759-700-65	s IC NJM79L05A
L300	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L301	1-410-369-11	s INDUCTOR, CHIP 1.0uH (3225)
L400	1-412-533-21	s INDUCTOR 47uH
Q400	8-729-109-44	s TRANSISTOR 2SK94
Q401	8-729-028-91	s TRANSISTOR DTA144EUA
R300	1-216-295-00	s METAL, CHIP 0 (2012)
R301	1-216-295-00	s METAL, CHIP 0 (2012)
R302	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R303	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R304	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R305	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R306	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R307	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R308	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)

(CP-301 BOARD for J)

Ref. No. or Q'ty	Part No.	SP Description
R309	1-218-760-11	s METAL, CHIP 220K 0.5% 1/10W (2012)
R310	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R311	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R400	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R401	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R402	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R403	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R404	1-216-061-00	s METAL, CHIP 3.3K 5% 1/10W (2012)
R405	1-216-678-11	s METAL, CHIP 13K 0.5% 1/10W (2012)
R406	1-216-657-11	s METAL, CHIP 1.8K 0.5% 1/10W (2012)
R407	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R408	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R409	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R410	1-216-676-11	s METAL, CHIP 11K 0.5% 1/10W (2012)
R411	1-216-672-11	s METAL, CHIP 7.5K 0.5% 1/10W (2012)
R412	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R413	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R414	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R415	1-216-686-11	s METAL, CHIP 30K 0.5% 1/10W (2012)
R416	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R417	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R418	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R419	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R420	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R421	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)

CP-334 BOARD

Ref. No. or Q'ty	Part No.	SP Description
lpc	A-8319-257-A	o MOUNTED CIRCUIT BOARD, CP-334
C1	1-126-933-11	s ELECT 100uF 20% 16V
C2	1-126-933-11	s ELECT 100uF 20% 16V
C3	1-126-933-11	s ELECT 100uF 20% 16V
C4	1-126-933-11	s ELECT 100uF 20% 16V
C5	1-126-933-11	s ELECT 100uF 20% 16V
C6	1-126-933-11	s ELECT 100uF 20% 16V
C7	1-126-933-11	s ELECT 100uF 20% 16V
C8	1-126-933-11	s ELECT 100uF 20% 16V
C10	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C11	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C12	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C13	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C14	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C15	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C16	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C17	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C18	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C19	1-126-933-11	s ELECT 100uF 20% 16V
C20	1-126-933-11	s ELECT 100uF 20% 16V
C21	1-126-933-11	s ELECT 100uF 20% 16V
C22	1-126-933-11	s ELECT 100uF 20% 16V
C23	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C24	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C25	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C26	1-126-933-11	s ELECT 100uF 20% 16V
C27	1-126-933-11	s ELECT 100uF 20% 16V
C28	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C29	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C30	1-126-933-11	s ELECT 100uF 20% 16V
C31	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C32	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C33	1-126-933-11	s ELECT 100uF 20% 16V
C34	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C35	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C36	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C37	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
CN1	1-573-580-11	s CONNECTOR, 2-BNC, FEMALE
CN2	1-573-580-11	s CONNECTOR, 2-BNC, FEMALE
CN3	1-573-584-11	s CONNECTOR, 3-BNC, FEMALE
CN4	1-573-584-11	s CONNECTOR, 3-BNC, FEMALE
CN5	1-573-584-11	s CONNECTOR, 3-BNC, FEMALE
CN170	1-506-478-11	s CONNECTOR, 13P, MALE
CN171	1-506-479-11	s CONNECTOR, 14P, MALE
CN172	1-506-469-11	s CONNECTOR, 4P, MALE
IC1	8-759-009-06	s IC MC14052BF
IC2	8-752-052-77	s IC CXA1450M
IC3	8-752-052-73	s IC CXA1451M
IC4	8-752-052-73	s IC CXA1451M
IC5	8-752-052-73	s IC CXA1451M
IC6	8-752-052-73	s IC CXA1451M
IC7	8-759-708-05	s IC NJM78L05A
IC8	8-759-700-65	s IC NJM79L05A
L1	1-410-482-31	s INDUCTOR 100uH
L2	1-410-482-31	s INDUCTOR 100uH
L3	1-410-482-31	s INDUCTOR 100uH
L4	1-410-482-31	s INDUCTOR 100uH

(CP-334 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
L5	1-410-482-31	s INDUCTOR 100uH
Q1	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q2	8-729-117-32	s TRANSISTOR 2SC4177-L6
R1	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R2	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R3	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R4	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R5	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R6	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R7	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R8	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R9	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R10	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R11	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R12	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R13	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R14	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R15	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R16	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R17	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R18	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R19	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R20	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R21	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R22	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R23	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R24	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R25	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R26	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R27	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R28	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R29	1-216-045-00	s METAL, CHIP 680 5% 1/10W (2012)
R30	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R31	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R34	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R35	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R36	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R37	1-216-045-00	s METAL, CHIP 680 5% 1/10W (2012)
R38	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R40	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
S1	1-570-157-51	s SWITCH, SLIDE
S2	1-570-157-51	s SWITCH, SLIDE

CP-335 BOARD

Ref. No. or Q'ty	Part No.	SP Description
lpc	A-8319-259-A	o MOUNTED CIRCUIT BOARD, CP-335
lpc	7-685-871-09	s SCREW +BVT 3x6 (S)
C1	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C2	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C3	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C4	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C5	1-126-393-11	s ELECT, CHIP 33uF 20% 10V
C6	1-163-121-00	s CERAMIC, CHIP 150pF 5% 50V (2012)
C51	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C52	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C53	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C54	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C55	1-126-393-11	s ELECT, CHIP 33uF 20% 10V
C56	1-163-121-00	s CERAMIC, CHIP 150pF 5% 50V (2012)
C101	1-163-009-11	s CERAMIC, CHIP 1000pF 10% 50V (2012)
C102	1-104-559-11	s FILM, CHIP 0.047uF 5% 16V (3216)
C103	1-163-009-11	s CERAMIC, CHIP 1000pF 10% 50V (2012)
C104	1-104-559-11	s FILM, CHIP 0.047uF 5% 16V (3216)
C105	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C106	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C107	1-126-396-11	s ELECT, CHIP 47uF 20% 16V
C108	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C109	1-126-396-11	s ELECT, CHIP 47uF 20% 16V
C110	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C111	1-126-396-11	s ELECT, CHIP 47uF 20% 16V
C112	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C113	1-126-396-11	s ELECT, CHIP 47uF 20% 16V
C114	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
CN3	1-764-275-11	s CONNECTOR, BNC, FEMALE
CN53	1-764-275-11	s CONNECTOR, BNC, FEMALE
CN101	1-764-275-11	s CONNECTOR, BNC, FEMALE
CN102	1-764-275-11	s CONNECTOR, BNC, FEMALE
CN196	1-506-469-11	s CONNECTOR, 4P, MALE
CN197	1-506-474-11	s CONNECTOR, 9P, MALE
D100	8-719-941-04	s DIODE SB007-03CP
D101	8-719-941-23	s DIODE DA204U
D102	8-719-941-23	s DIODE DA204U
D103	8-719-941-04	s DIODE SB007-03CP
IC1	8-759-926-07	s IC SN74HC132ANS
IC51	8-759-926-07	s IC SN74HC132ANS
IC100	8-759-446-74	s IC TA79L05F
IC101	8-759-978-96	s IC SN75207BNS
IC103	8-759-234-08	s IC TA78L05F
L101	1-412-279-31	s INDUCTOR, CHIP 270uH (3225)
L102	1-410-378-11	s INDUCTOR, CHIP 5.6uH (3225)
L103	1-412-279-31	s INDUCTOR, CHIP 270uH (3225)
L104	1-410-378-11	s INDUCTOR, CHIP 5.6uH (3225)
Q1	8-729-102-07	s TRANSISTOR 2SC2223-F13
Q2	8-729-102-07	s TRANSISTOR 2SC2223-F13
Q3	8-729-122-63	s TRANSISTOR 2SA1226-E4
Q4	8-729-102-07	s TRANSISTOR 2SC2223-F13
Q5	8-729-122-63	s TRANSISTOR 2SA1226-E4
Q51	8-729-102-07	s TRANSISTOR 2SC2223-F13
Q52	8-729-102-07	s TRANSISTOR 2SC2223-F13
Q53	8-729-122-63	s TRANSISTOR 2SA1226-E4
Q54	8-729-102-07	s TRANSISTOR 2SC2223-F13
Q55	8-729-122-63	s TRANSISTOR 2SA1226-E4

(CP-335 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R2	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R3	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R4	1-216-648-11	s METAL, CHIP 750 0.5% 1/10W (2012)
R5	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R6	1-216-615-11	s METAL, CHIP 33 0.5% 1/10W (2012)
R7	1-216-308-00	s METAL, CHIP 4.7 5% 1/10W (2012)
R8	1-216-308-00	s METAL, CHIP 4.7 5% 1/10W (2012)
R9	1-216-622-11	s METAL, CHIP 62 0.5% 1/10W (2012)
R20	1-216-615-11	s METAL, CHIP 33 0.5% 1/10W (2012)
R51	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R52	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R53	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R54	1-216-648-11	s METAL, CHIP 750 0.5% 1/10W (2012)
R55	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R56	1-216-615-11	s METAL, CHIP 33 0.5% 1/10W (2012)
R57	1-216-308-00	s METAL, CHIP 4.7 5% 1/10W (2012)
R58	1-216-308-00	s METAL, CHIP 4.7 5% 1/10W (2012)
R59	1-216-622-11	s METAL, CHIP 62 0.5% 1/10W (2012)
R70	1-216-615-11	s METAL, CHIP 33 0.5% 1/10W (2012)
R101	1-216-633-11	s METAL, CHIP 180 0.5% 1/10W (2012)
R102	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R103	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R104	1-216-621-11	s METAL, CHIP 56 0.5% 1/10W (2012)
R105	1-216-614-11	s METAL, CHIP 30 0.5% 1/10W (2012)
R106	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R107	1-216-633-11	s METAL, CHIP 180 0.5% 1/10W (2012)
R108	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R109	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R110	1-216-621-11	s METAL, CHIP 56 0.5% 1/10W (2012)
R111	1-216-614-11	s METAL, CHIP 30 0.5% 1/10W (2012)
R112	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R115	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R116	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)

DEC-110 BOARD

Ref. No. or Q'ty	Part No.	SP Description
		*a: LOT No. 804 and 805
		*b: LOT No. 806 and higher
		*c: LOT No. 806 and 807
		*d: LOT No. 804 through 810
		*e: LOT No. 811 and higher
		*f: LOT No. 808 only
		*g: LOT No. 804 through 808
		*h: LOT No. 809 and higher
		*1: Board No. suffix -11
		*2: Board No. suffix -12
1pc	A-8319-261-A	o MOUNTED CIRCUIT BOARD, DEC-110
1pc	3-179-084-01	s LEVER (R), PC BOARD
1pc	3-179-085-01	s LEVER (L), PC BOARD
C100	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C101	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C102	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C103	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C104	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C105	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C106	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C107	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C108	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C110	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C111	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C112	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C113	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V (2012)
C114	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C115	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C117	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C118	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C119	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C121	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C123	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C125	1-126-395-11	s ELECT, CHIP 22uF 20% 16V
C126	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C127	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C128	*2 1-126-395-11	s ELECT, CHIP 22uF 20% 16V
	*1 1-115-171-11	s TANTALUM, CHIP 3.3uF 20% 16V (3216)
C129	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C130	1-126-395-11	s ELECT, CHIP 22uF 20% 16V
C131	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C132	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C133	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C135	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C136	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C137	1-113-991-11	s TANTALUM, CHIP 33uF 20% 16V (6032)
C138	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C140	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C141	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C144	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C145	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C146	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C147	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V (2012)
C148	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C149	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C150	1-135-212-21	s TANTALUM, CHIP 2.2uF 10% 35V (3528)
C151	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C152	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C153	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C154	1-135-212-21	s TANTALUM, CHIP 2.2uF 10% 35V (3528)
C155	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C156	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C157	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C158	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C159	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C160	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V (2012)
C161	1-163-275-11	s CERAMIC, CHIP 1000pF 5% 50V (2012)
C162	1-163-275-11	s CERAMIC, CHIP 1000pF 5% 50V (2012)
C163	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V (2012)
C164	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C165	1-163-275-11	s CERAMIC, CHIP 1000pF 5% 50V (2012)
C166	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C167	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C168	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C169	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C170	1-163-275-11	s CERAMIC, CHIP 1000pF 5% 50V (2012)
C171	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C172	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C173	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C174	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C175	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C176	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C177	*1 1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C178	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C179	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C181	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C182	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C183	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C184	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C185	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C186	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C187	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C188	1-163-275-11	s CERAMIC, CHIP 1000pF 5% 50V (2012)
C189	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C190	1-163-253-11	s CERAMIC, CHIP 120pF 5% 50V (2012)
C191	1-163-275-11	s CERAMIC, CHIP 1000pF 5% 50V (2012)
C192	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C193	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C194	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C195	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C196	1-113-991-11	s TANTALUM, CHIP 33uF 20% 16V (6032)
C197	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C198	*b 1-162-714-11	s CERAMIC 150pF 1% 50V
C199	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C200	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C201	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C202	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C203	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C204	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C205	*2 1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C206	*2 1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C290	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C291	*2 1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C292	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C293	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C294	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C300	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C301	1-128-416-11	s ELECT, CHIP 100uF 20% 16V

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C302	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C303	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C304	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C305	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C306	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C307	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C308	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C309	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C310	1-113-991-11	s TANTALUM, CHIP 33uF 20% 16V (6032)
C311	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C312	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C313	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C314	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C315	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C316	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C317	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C318	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C319	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C320	1-128-416-11	s ELECT, CHIP 100uF 20% 16V
C321	1-104-913-11	s TANTALUM, CHIP 10uF 20% 16V (3528)
C322	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C323	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C324	1-113-991-11	s TANTALUM, CHIP 33uF 20% 16V (6032)
C325	1-113-991-11	s TANTALUM, CHIP 33uF 20% 16V (6032)
C326	*2 1-128-414-11	s ELECT, CHIP 220uF 20% 6.3V
	*1 1-117-372-11	s TANTALUM, CHIP 100uF 20% 10V (7343)
C327	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C328	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C329	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C330	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C331	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C332	1-113-991-11	s TANTALUM, CHIP 33uF 20% 16V (6032)
C333	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C334	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C335	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C336	1-107-823-11	s CERAMIC, CHIP 0.47uF 10% 16V (2012)
C337	1-107-823-11	s CERAMIC, CHIP 0.47uF 10% 16V (2012)
C338	1-107-823-11	s CERAMIC, CHIP 0.47uF 10% 16V (2012)
C339	1-107-823-11	s CERAMIC, CHIP 0.47uF 10% 16V (2012)
C340	1-107-823-11	s CERAMIC, CHIP 0.47uF 10% 16V (2012)
C341	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C342	1-113-991-11	s TANTALUM, CHIP 33uF 20% 16V (6032)
C343	*2 1-104-478-11	s TANTALUM, CHIP 10uF 20% 35V (5846)
	*1 1-107-690-11	s TANTALUM, CHIP 6.8uF 20% 35V
C344	1-113-991-11	s TANTALUM, CHIP 33uF 20% 16V (6032)
C345	1-113-991-11	s TANTALUM, CHIP 33uF 20% 16V (6032)
C346	1-113-991-11	s TANTALUM, CHIP 33uF 20% 16V (6032)
C347	1-135-070-00	s TANTALUM, CHIP 0.1uF 10% 35V (3216)
C348	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C349	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C350	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C351	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C352	1-113-991-11	s TANTALUM, CHIP 33uF 20% 16V (6032)
C353	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C354	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C355	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C356	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C357	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C358	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C359	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C360	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C363	1-113-991-11	s TANTALUM, CHIP 33uF 20% 16V (6032)
C364	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C365	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C366	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C367	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C368	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C369	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C370	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C371	1-113-991-11	s TANTALUM, CHIP 33uF 20% 16V (6032)
C372	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C373	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C374	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C375	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C376	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C377	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C378	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C379	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C380	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C381	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C382	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C383	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C384	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C385	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C386	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C390	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C400	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C401	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C402	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C403	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C404	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C405	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C406	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C407	1-163-237-11	s CERAMIC, CHIP 27pF 5% 50V (2012)
C409	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C410	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C411	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C412	1-163-121-00	s CERAMIC, CHIP 150pF 5% 50V (2012)
C413	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C414	1-163-249-11	s CERAMIC, CHIP 82pF 5% 50V (2012)
C415	1-163-253-11	s CERAMIC, CHIP 120pF 5% 50V (2012)
C416	1-163-257-11	s CERAMIC, CHIP 180pF 5% 50V (2012)
C417	1-163-257-11	s CERAMIC, CHIP 180pF 5% 50V (2012)
C418	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V (2012)
C419	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C420	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C421	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C422	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C423	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C424	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C425	1-163-237-11	s CERAMIC, CHIP 27pF 5% 50V (2012)
C426	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C427	1-126-396-11	s ELECT, CHIP 47uF 20% 16V
C428	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C429	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C430	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C431	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C432	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C433	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C434	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C435	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C437	*1 1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C438	1-104-559-11	s FILM, CHIP 0.047uF 5% 16V (3216)
C439	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C440	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C441	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C442	1-135-070-00	s TANTALUM, CHIP 0.1uF 10% 35V (3216)
C443	1-135-070-00	s TANTALUM, CHIP 0.1uF 10% 35V (3216)
C444	1-135-070-00	s TANTALUM, CHIP 0.1uF 10% 35V (3216)
C445	1-135-072-21	s TANTALUM, CHIP 0.22uF 10% 35V(3216)
C446	1-135-072-21	s TANTALUM, CHIP 0.22uF 10% 35V(3216)
C447	1-135-072-21	s TANTALUM, CHIP 0.22uF 10% 35V(3216)
C448	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C449	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C450	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C451	1-163-253-11	s CERAMIC, CHIP 120pF 5% 50V (2012)
C452	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C453	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C454	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C455	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C456	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C457	1-104-851-11	s TANTALUM, CHIP 10uF 20% 10V (3216)
C458	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C459	1-104-851-11	s TANTALUM, CHIP 10uF 20% 10V (3216)
C460	1-104-851-11	s TANTALUM, CHIP 10uF 20% 10V (3216)
C461	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C462	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C463	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C464	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C465	1-113-991-11	s TANTALUM, CHIP 33uF 20% 16V (6032)
C466	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C467	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C468	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C469	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C470	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C471	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C472	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C473	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C474	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C475	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C476	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C477	1-104-608-11	s ELECT, CHIP 33uF 20% 6.3V
C478	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C479	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C480	1-104-608-11	s ELECT, CHIP 33uF 20% 6.3V
C481	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C482	1-104-608-11	s ELECT, CHIP 33uF 20% 6.3V
C483	1-104-608-11	s ELECT, CHIP 33uF 20% 6.3V
C484	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C485	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C486	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C487	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C488	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C489	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C490	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C491	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C492	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C493	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C494	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C495	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C496	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C497	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C498	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C499	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C500	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C501	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C502	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C503	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C504	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C505	1-113-991-11	s	TANTALUM, CHIP 33uF 20% 16V (6032)
C506	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C507	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C508	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C509	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C510	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C511	1-104-608-11	s	ELECT, CHIP 33uF 20% 6.3V
C512	1-104-608-11	s	ELECT, CHIP 33uF 20% 6.3V
C513	1-163-243-11	s	CERAMIC, CHIP 47pF 5% 50V (2012)
C514	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C515	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C516	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C517	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C518	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C519	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C520	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C521	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C600	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C601	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C602	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C603	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C604	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C605	1-163-021-11	s	CERAMIC, CHIP 0.01uF 10% 50V (2012)
C606	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C607	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C608	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C609	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C611	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C612	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C613	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C614	1-113-987-11	s	TANTALUM, CHIP 4.7uF 20% 25V (5833)
C615	1-113-987-11	s	TANTALUM, CHIP 4.7uF 20% 25V (5833)
C616	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C617	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C618	1-113-987-11	s	TANTALUM, CHIP 4.7uF 20% 25V (5833)
C619	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C620	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C621	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C622	1-126-392-11	s	ELECT, CHIP 100uF 20% 6.3V
C623	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1000 *1	1-161-772-11	s	CERAMIC 0.1uF 10% 25V
CN99	1-778-261-12	o	CONNECTOR, B-B 124P, MALE
CN100	1-778-261-12	o	CONNECTOR, B-B 124P, MALE
CP300	1-767-696-11	s	VCO, CRYSTAL 35.46895 MHz
CP301	1-767-618-11	s	VCO, CRYSTAL 28.63636 MHz
CP600	1-760-275-11	s	VCO, CRYSTAL 27.0 MHz

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D100	8-719-941-23	s	DIODE DA204U
D101	8-719-941-23	s	DIODE DA204U
D102 *f	8-719-941-23	s	DIODE DA204U
D300	8-719-941-23	s	DIODE DA204U
D400	8-719-157-11	s	DIODE RD3.3M-B
D401	8-719-157-11	s	DIODE RD3.3M-B
D402	8-719-157-11	s	DIODE RD3.3M-B
D600	8-719-941-23	s	DIODE DA204U
FB300	1-543-309-21	s	BEAD, FERRITE
FB600	1-543-309-21	s	BEAD, FERRITE
FL100	1-234-262-21	s	FILTER, LOW-PASS
FL300	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL301	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL302	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL303	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL304	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL305	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL306	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL307	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL308	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL309	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL310	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL311	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL312	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL313	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL314	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL400	1-234-006-11	s	FILTER, LOW-PASS
FL401	1-234-151-11	s	FILTER, LOW-PASS
FL402	1-234-151-11	s	FILTER, LOW-PASS
IC100	8-759-822-95	s	IC L79M05T-FA
IC101	8-759-491-46	s	IC TC74VHCT04AFT
IC102	8-759-391-30	s	IC 74LVX3245QSC
IC103	8-759-262-03	s	IC MC14577CF
IC104	8-759-234-08	s	IC TA78L05F
IC105	8-759-446-74	s	IC TA79L05F
IC106	8-752-381-84	s	IC CXD1095BQ
IC108	8-759-485-82	s	IC MC34182D
IC109	8-759-710-88	s	IC NJM431U
IC110	8-759-242-64	s	IC TC4W53F
IC111	8-752-334-55	s	IC CXD1175M
IC112	8-759-251-40	s	IC MB88E346PFV-G-BND-ER
IC114	8-759-098-16	s	IC LT1227CS8
IC115	8-759-485-82	s	IC MC34182D
IC116	8-759-485-82	s	IC MC34182D
IC117	8-759-987-27	s	IC LM1881M
IC122	8-759-528-99	s	IC TC74VHC221AFT(EL)
IC123	8-759-058-64	s	IC TC7S32FU
IC124	8-759-441-31	s	IC MC14053BD
IC125	8-759-485-82	s	IC MC34182D
IC126 *2	8-759-262-03	s	IC MC14577CF
*c	8-759-443-59	s	IC LF351M
*a	8-759-054-61	s	IC CLC505AJE
IC127	8-759-485-82	s	IC MC34182D
IC128	8-752-052-77	s	IC CXA1450M
IC129	8-759-702-08	s	IC NJM360M
IC130	8-759-098-16	s	IC LT1227CS8
IC132	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC133	8-759-524-18	s	IC TC74VHC163FT(EL)

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC134	8-759-524-18	s IC TC74VHC163FT(EL)
IC137	8-759-702-08	s IC NJM360M
IC138	8-759-058-64	s IC TC7S32FU
IC290	8-759-182-47	s IC CLC520AJE-L
IC291	8-759-485-82	s IC MC34182D
IC300	8-759-710-88	s IC NJM431U
IC301	8-759-196-96	s IC TC7SH08FU
IC302	8-759-542-91	s IC S-80840ANUP-ED4
IC303	8-759-173-16	s IC TL062CPW
IC304	8-759-271-86	s IC TC7SH04FU
IC305	8-759-234-77	s IC TC4S66F
IC306	8-759-524-50	s IC TC74VHC541FT(EL)
IC307	8-759-209-90	s IC TC4S71F
IC308	8-752-376-32	s IC CXD2310AR
IC309	8-752-360-44	s IC CXK1203AR
IC310	8-729-045-28	s TRANSISTOR SI4532DY
IC311	8-729-040-75	s TRANSISTOR SI4953DY
IC312	8-729-025-54	s TRANSISTOR SI9958DY
IC313	8-759-528-99	s IC TC74VHC221AFT(EL)
IC314	8-759-523-79	s IC TC74VHC02FT(EL)
IC315	8-759-523-95	s IC TC74VHC74FT(EL)
IC316	8-752-375-22	s IC CXD304-106Q
IC317	8-759-174-13	s IC CXD8819AQ
IC318	8-759-173-16	s IC TL062CPW
IC319	8-729-040-75	s TRANSISTOR SI4953DY
IC320	8-759-196-97	s IC TC7SH32FU
IC321	8-752-334-55	s IC CXD1175M
IC322	8-759-524-28	s IC TC74VHC245FT(EL)
IC323	8-759-196-97	s IC TC7SH32FU
IC324	8-759-233-66	s IC TC74HCT04AF
IC325	8-759-485-82	s IC MC34182D
IC326	8-759-386-25	s IC 74LCX245MTC
IC327	8-759-386-25	s IC 74LCX245MTC
IC328	8-759-523-95	s IC TC74VHC74FT(EL)
IC329	8-759-528-99	s IC TC74VHC221AFT(EL)
IC330	8-759-523-97	s IC TC74VHC123AFT(EL)
IC331	8-759-528-99	s IC TC74VHC221AFT(EL)
IC390	8-759-907-81	s IC SN74LS221NS
IC400	8-759-822-95	s IC L79M05T-FA
IC401	8-759-987-27	s IC LM1881M
IC402	8-759-528-99	s IC TC74VHC221AFT(EL)
IC403	8-759-824-00	s IC L78M08T-TL
IC404	8-759-822-95	s IC L79M05T-FA
IC405	8-759-485-82	s IC MC34182D
IC406 *2	8-759-262-03	s IC MC14577CF
*1	8-759-054-61	s IC CLC505AJE
IC407	8-759-485-83	s IC MC34184DR2
IC408	8-759-485-83	s IC MC34184DR2
IC409	8-759-485-83	s IC MC34184DR2
IC410	8-759-234-77	s IC TC4S66F
IC411	8-759-234-77	s IC TC4S66F
IC412	8-759-234-77	s IC TC4S66F
IC413 *1	8-759-485-82	s IC MC34182D
IC414	8-759-702-08	s IC NJM360M
IC415	8-759-702-08	s IC NJM360M
IC416	8-759-524-21	s IC TC74VHC174FT
IC417	8-759-524-21	s IC TC74VHC174FT
IC418	8-759-929-26	s IC TL431CPS
IC419	8-759-173-16	s IC TL062CPW

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC420	8-759-173-16	s IC TL062CPW
IC421	8-759-523-78	s IC TC74VHC00FT(EL)
IC422	8-752-376-32	s IC CXD2310AR
IC423	8-752-376-32	s IC CXD2310AR
IC424	8-759-524-26	s IC TC74VHC240FT
IC425	8-759-524-18	s IC TC74VHC163FT(EL)
IC426	8-759-277-19	s IC UPD485505G-35
IC427	8-759-277-19	s IC UPD485505G-35
IC428	8-759-277-19	s IC UPD485505G-35
IC429	8-759-031-84	s IC SC7S04F
IC430	8-759-524-50	s IC TC74VHC541FT(EL)
IC431	8-759-524-50	s IC TC74VHC541FT(EL)
IC432	8-759-524-50	s IC TC74VHC541FT(EL)
IC433	8-759-524-50	s IC TC74VHC541FT(EL)
IC434	8-759-929-26	s IC TL431CPS
IC435	8-759-173-16	s IC TL062CPW
IC436	8-759-524-27	s IC TC74VHC244FT(EL)
IC437	8-752-376-32	s IC CXD2310AR
IC438	8-752-360-44	s IC CXK1203AR
IC600	8-752-368-45	s IC CXD204-104Q
IC601	8-759-031-84	s IC SC7S04F
IC602	8-759-209-90	s IC TC4S71F
IC603	8-759-105-49	s IC UPC319G2
IC604	8-759-925-80	s IC SN74HC14ANS
IC605	8-759-359-12	s IC DSI000Z-100
IC606	8-759-031-84	s IC SC7S04F
IC607	8-759-031-84	s IC SC7S04F
IC608	8-759-031-84	s IC SC7S04F
IC609	8-759-295-09	s IC TLC2932IPW
IC610	8-759-485-83	s IC MC34184DR2
IC611	8-759-386-25	s IC 74LCX245MTC
IC612	8-759-386-25	s IC 74LCX245MTC
IC613	8-729-040-75	s TRANSISTOR SI4953DY
IC614	8-759-242-64	s IC TC4W53F
IC615	8-759-985-55	s IC 74AC245SJ
L100	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L101	1-414-754-11	s INDUCTOR, CHIP 10uH (2520)
L102	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L300	1-414-754-11	s INDUCTOR, CHIP 10uH (2520)
L301	1-414-754-11	s INDUCTOR, CHIP 10uH (2520)
L302	1-414-754-11	s INDUCTOR, CHIP 10uH (2520)
L303	1-414-754-11	s INDUCTOR, CHIP 10uH (2520)
L400	1-412-192-11	s INDUCTOR, CHIP 56uH (3225)
PS300	▲ 1-533-351-11	s FUSE, CHIP 2A 125V
Q100	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q101	8-729-013-37	s TRANSISTOR 2SC4213-AB
Q102	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q105	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q109	8-729-904-41	s TRANSISTOR FMY3
Q110	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q111	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q112	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q113	8-729-118-56	s TRANSISTOR 2SK852-X2
Q114	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q300	8-729-029-14	s TRANSISTOR DTC144EUA
Q301	8-729-029-14	s TRANSISTOR DTC144EUA
Q302	8-729-029-14	s TRANSISTOR DTC144EUA
Q303	8-729-117-32	s TRANSISTOR 2SC4177-L6

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q304	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q305	8-729-028-91	s	TRANSISTOR DTA144EUA
Q306	8-729-028-91	s	TRANSISTOR DTA144EUA
Q307	8-729-029-14	s	TRANSISTOR DTC144EUA
Q308	8-729-029-14	s	TRANSISTOR DTC144EUA
Q309	8-729-029-14	s	TRANSISTOR DTC144EUA
Q310	8-729-029-14	s	TRANSISTOR DTC144EUA
Q311	8-729-029-14	s	TRANSISTOR DTC144EUA
Q312	8-729-904-41	s	TRANSISTOR FMY3
Q400	8-729-028-91	s	TRANSISTOR DTA144EUA
Q401	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q402	8-729-209-06	s	TRANSISTOR 2SC4213-A
Q403	8-729-209-06	s	TRANSISTOR 2SC4213-A
Q404	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q405	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q406	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q407	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q408	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q409	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q410	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q411	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q412	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q413	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q414	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q415	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q416	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q417	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q418	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q419	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q420	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q421	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q422	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q423	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q424	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q425	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q426	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q427	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q428	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q600	8-729-029-14	s	TRANSISTOR DTC144EUA
R100	1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (2012)
R101	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W (2012)
R102	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W (2012)
R103	1-216-663-11	s	METAL, CHIP 3.3K 0.5% 1/10W (2012)
R104	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R105	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W (2012)
R108	1-216-631-11	s	METAL, CHIP 150 0.5% 1/10W (2012)
R109	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R110	1-216-699-11	s	METAL, CHIP 100K 0.5% 1/10W (2012)
R111	1-216-699-11	s	METAL, CHIP 100K 0.5% 1/10W (2012)
R112	1-216-699-11	s	METAL, CHIP 100K 0.5% 1/10W (2012)
R113	1-216-699-11	s	METAL, CHIP 100K 0.5% 1/10W (2012)
R114	1-216-649-11	s	METAL, CHIP 820 0.5% 1/10W (2012)
R115	*e 1-216-623-11	s	METAL, CHIP 68 0.5% 1/10W (2012)
	*d 1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (2012)
R116	1-216-667-11	s	METAL, CHIP 4.7K 0.5% 1/10W (2012)
R117	*e 1-216-625-11	s	METAL, CHIP 82 0.5% 1/10W (2012)
	*d 1-216-624-11	s	METAL, CHIP 75 0.5% 1/10W (2012)
R121	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W (2012)
R122	*f 1-218-756-11	s	METAL, CHIP 150K 0.5% 1/10W (2012)

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R124	1-216-677-11	s	METAL, CHIP 12K 0.5% 1/10W (2012)
R125	1-216-643-11	s	METAL, CHIP 470 0.5% 1/10W (2012)
R127	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R129	1-216-641-11	s	METAL, CHIP 390 0.5% 1/10W (2012)
R130	1-216-699-11	s	METAL, CHIP 100K 0.5% 1/10W (2012)
R131	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W (2012)
R137	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W (2012)
R138	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W (2012)
R146	1-218-764-11	s	METAL, CHIP 330K 0.5% 1/10W (2012)
R147	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R148	1-216-661-11	s	METAL, CHIP 2.7K 0.5% 1/10W (2012)
R149	1-216-661-11	s	METAL, CHIP 2.7K 0.5% 1/10W (2012)
R150	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W (2012)
R151	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W (2012)
R152	*2 1-216-672-11	s	METAL, CHIP 7.5K 0.5% 1/10W (2012)
	*1 1-216-683-11	s	METAL, CHIP 22K 0.5% 1/10W (2012)
R153	1-216-687-11	s	METAL, CHIP 33K 0.5% 1/10W (2012)
R154	1-216-655-11	s	METAL, CHIP 1.5K 0.5% 1/10W (2012)
R155	*g 1-216-677-11	s	METAL, CHIP 12K 0.5% 1/10W (2012)
	*f 1-216-680-11	s	METAL, CHIP 16K 0.5% 1/10W (2012)
R156	1-216-687-11	s	METAL, CHIP 33K 0.5% 1/10W (2012)
R157	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W (2012)
R158	1-216-671-11	s	METAL, CHIP 6.8K 0.5% 1/10W (2012)
R159	*b 1-216-671-11	s	METAL, CHIP 6.8K 0.5% 1/10W (2012)
	*a 1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W (2012)
R160	1-216-669-11	s	METAL, CHIP 5.6K 0.5% 1/10W (2012)
R161	1-216-649-11	s	METAL, CHIP 820 0.5% 1/10W (2012)
R162	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R163	1-218-776-11	s	METAL, CHIP 1.0M 0.5% 1/10W (2012)
R164	1-216-667-11	s	METAL, CHIP 4.7K 0.5% 1/10W (2012)
R166	1-218-772-11	s	METAL, CHIP 680K 0.5% 1/10W (2012)
R167	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R168	1-216-619-11	s	METAL, CHIP 47 0.5% 1/10W (2012)
R169	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R171	1-216-677-11	s	METAL, CHIP 12K 0.5% 1/10W (2012)
R172	1-216-687-11	s	METAL, CHIP 33K 0.5% 1/10W (2012)
R173	1-216-670-11	s	METAL, CHIP 6.2K 0.5% 1/10W (2012)
R174	1-216-691-11	s	METAL, CHIP 47K 0.5% 1/10W (2012)
R175	1-216-657-11	s	METAL, CHIP 1.8K 0.5% 1/10W (2012)
R176	1-216-661-11	s	METAL, CHIP 2.7K 0.5% 1/10W (2012)
R177	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R178	1-216-661-11	s	METAL, CHIP 2.7K 0.5% 1/10W (2012)
R179	1-216-667-11	s	METAL, CHIP 4.7K 0.5% 1/10W (2012)
R180	1-216-684-11	s	METAL, CHIP 24K 0.5% 1/10W (2012)
R181	1-216-659-11	s	METAL, CHIP 2.2K 0.5% 1/10W (2012)
R182	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W (2012)
R183	*2 1-216-133-00	s	METAL, CHIP 3.3M 5% 1/10W (2012)
	*a 1-216-133-00	s	METAL, CHIP 3.3M 5% 1/10W (2012)
R184	*2 1-216-295-00	s	METAL, CHIP 0 (2012)
	*1 1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R185	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R186	*2 1-216-295-00	s	METAL, CHIP 0 (2012)
	*1 1-216-699-11	s	METAL, CHIP 100K 0.5% 1/10W (2012)
R187	1-216-659-11	s	METAL, CHIP 2.2K 0.5% 1/10W (2012)
R188	1-216-691-11	s	METAL, CHIP 47K 0.5% 1/10W (2012)
R189	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W (2012)
R191	1-216-661-11	s	METAL, CHIP 2.7K 0.5% 1/10W (2012)
R192	1-218-776-11	s	METAL, CHIP 1.0M 0.5% 1/10W (2012)
R194	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R195	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R197	1-216-295-00	s METAL, CHIP 0 (2012)
R198	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R199	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R200	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R202	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R204	1-216-681-11	s METAL, CHIP 18K 0.5% 1/10W (2012)
R205	1-216-622-11	s METAL, CHIP 62 0.5% 1/10W (2012)
R206	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R209	1-216-295-00	s METAL, CHIP 0 (2012)
R211	1-216-295-00	s METAL, CHIP 0 (2012)
R212	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R213	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R215	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R216	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R218	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R220	1-216-295-00	s METAL, CHIP 0 (2012)
R222	1-216-295-00	s METAL, CHIP 0 (2012)
R223	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R225	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R226	1-216-669-11	s METAL, CHIP 5.6K 0.5% 1/10W (2012)
R227	1-216-671-11	s METAL, CHIP 6.8K 0.5% 1/10W (2012)
R228	1-216-673-11	s METAL, CHIP 8.2K 0.5% 1/10W (2012)
R229	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R230	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R231	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R232	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R233	*b 1-216-670-11	s METAL, CHIP 6.2K 0.5% 1/10W (2012)
	*a 1-216-671-11	s METAL, CHIP 6.8K 0.5% 1/10W (2012)
R234	1-216-670-11	s METAL, CHIP 6.2K 0.5% 1/10W (2012)
R235	1-216-647-11	s METAL, CHIP 680 0.5% 1/10W (2012)
R236	*2 1-216-657-11	s METAL, CHIP 1.8K 0.5% 1/10W (2012)
	*c 1-216-658-11	s METAL, CHIP 2.0K 0.5% 1/10W (2012)
	*a 1-216-657-11	s METAL, CHIP 1.8K 0.5% 1/10W (2012)
R237	1-216-657-11	s METAL, CHIP 1.8K 0.5% 1/10W (2012)
R238	*c 1-216-690-11	s METAL, CHIP 43K 0.5% 1/10W (2012)
R239	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R240	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R290	1-216-642-11	s METAL, CHIP 430 0.5% 1/10W (2012)
R291	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R292	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R293	*g 1-216-698-11	s METAL, CHIP 91K 0.5% 1/10W (2012)
	*f 1-216-697-11	s METAL, CHIP 82K 0.5% 1/10W (2012)
	*1 1-216-698-11	s METAL, CHIP 91K 0.5% 1/10W (2012)
R295	1-216-697-11	s METAL, CHIP 82K 0.5% 1/10W (2012)
R300	1-216-672-11	s METAL, CHIP 7.5K 0.5% 1/10W (2012)
R301	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R302	1-218-766-11	s METAL, CHIP 390K 0.5% 1/10W (2012)
R303	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R304	1-216-696-11	s METAL, CHIP 75K 0.5% 1/10W (2012)
R305	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R306	1-216-685-11	s METAL, CHIP 27K 0.5% 1/10W (2012)
R307	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R308	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R309	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R310	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R311	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R312	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R313	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R314	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R315	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R317	1-216-611-11	s METAL, CHIP 22 0.5% 1/10W (2012)
R319	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R320	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R321	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R322	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R323	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R325	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R326	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R327	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R328	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R329	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R330	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R331	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R332	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R333	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R334	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R335	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R336	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R337	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R338	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R339	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R340	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R345	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R346	*h 1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
	*g 1-216-670-11	s METAL, CHIP 6.2K 0.5% 1/10W (2012)
R347	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R348	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R349	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R350	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R351	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R352	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R353	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R354	1-216-295-00	s METAL, CHIP 0 (2012)
R355	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R356	1-216-674-11	s METAL, CHIP 9.1K 0.5% 1/10W (2012)
R357	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R358	1-216-129-00	s METAL, CHIP 2.2M 5% 1/10W (2012)
R359	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R360	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R361	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R362	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R363	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R364	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R365	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R366	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R367	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R368	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R369	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R370	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R371	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R372	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R373	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R374	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R375	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R376	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R377	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R378	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R379	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R380	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R381	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R382	1-216-691-11	s METAL, CHIP 47K 0.5% 1/10W (2012)
R383	1-216-691-11	s METAL, CHIP 47K 0.5% 1/10W (2012)
R384	1-216-688-11	s METAL, CHIP 36K 0.5% 1/10W (2012)
R385	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R386	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R390	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R391	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R400	1-216-691-11	s METAL, CHIP 47K 0.5% 1/10W (2012)
R401	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R402	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R403	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R404	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R405	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R406	1-216-640-11	s METAL, CHIP 360 0.5% 1/10W (2012)
R407	1-216-640-11	s METAL, CHIP 360 0.5% 1/10W (2012)
R408	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R409	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R410	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R411	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W (2012)
R412	1-216-650-11	s METAL, CHIP 910 0.5% 1/10W (2012)
R413	1-216-650-11	s METAL, CHIP 910 0.5% 1/10W (2012)
R415	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R416	1-216-649-11	s METAL, CHIP 820 0.5% 1/10W (2012)
R417	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R418	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R419	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R420	1-216-639-11	s METAL, CHIP 330 0.5% 1/10W (2012)
R421	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R422	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R423	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R424	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R426	1-216-668-11	s METAL, CHIP 5.1K 0.5% 1/10W (2012)
R427	1-216-668-11	s METAL, CHIP 5.1K 0.5% 1/10W (2012)
R428	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R429	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R430	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R431	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R432	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R433	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R434	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R435	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R436	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R437	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R438	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R439	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R440	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R441	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R442	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R443	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R444	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R445	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R446	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R447	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R448	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R449	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R450	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R451	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R452	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R453	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R454	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R455	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R456	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R457	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R458	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R459	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R460	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R461	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R463	*2 1-216-295-00	s METAL, CHIP 0 (2012)
	*1 1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R464	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R465	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R466	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R467	*1 1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R468	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R469	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R470	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R471	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R472	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R473	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R474	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R475	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R476	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R477	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R478	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R479	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R480	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R481	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R482	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R483	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R484	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R485	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R486	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R487	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R488	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R489	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R490	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R491	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R492	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R493	1-216-669-11	s METAL, CHIP 5.6K 0.5% 1/10W (2012)
R494	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R495	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R496	1-216-669-11	s METAL, CHIP 5.6K 0.5% 1/10W (2012)
R497	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R498	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R499	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R500	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R501	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R502	1-216-672-11	s METAL, CHIP 7.5K 0.5% 1/10W (2012)
R503	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R504	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R505	1-218-766-11	s METAL, CHIP 390K 0.5% 1/10W (2012)
R506	1-216-696-11	s METAL, CHIP 75K 0.5% 1/10W (2012)
R507	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R508	1-216-696-11	s METAL, CHIP 75K 0.5% 1/10W (2012)
R509	1-218-766-11	s METAL, CHIP 390K 0.5% 1/10W (2012)
R510	1-216-685-11	s METAL, CHIP 27K 0.5% 1/10W (2012)
R515	1-216-295-00	s METAL, CHIP 0 (2012)

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R522	1-216-295-00	s METAL, CHIP 0 (2012)
R525	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R526	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R527	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R528	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R529	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R530	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R531	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R532	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R533	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R535	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R536	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R538	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R539	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R540	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R541	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R542	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R543	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R544	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R545	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R546	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R547	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R549	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R550	1-216-295-00	s METAL, CHIP 0 (2012)
R551	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R552	1-216-295-00	s METAL, CHIP 0 (2012)
R553	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R555	1-216-672-11	s METAL, CHIP 7.5K 0.5% 1/10W (2012)
R556	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R557	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R558	1-216-619-11	s METAL, CHIP 47 0.5% 1/10W (2012)
R559	1-218-766-11	s METAL, CHIP 390K 0.5% 1/10W (2012)
R560	1-216-696-11	s METAL, CHIP 75K 0.5% 1/10W (2012)
R561	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R562	1-216-685-11	s METAL, CHIP 27K 0.5% 1/10W (2012)
R563	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R564	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R565	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R567	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R568	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R569	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R570	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R571	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R572	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R573	1-216-295-00	s METAL, CHIP 0 (2012)
R575	1-216-295-00	s METAL, CHIP 0 (2012)
R601	1-216-295-00	s METAL, CHIP 0 (2012)
R603	1-216-295-00	s METAL, CHIP 0 (2012)
R604	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R605	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R607	1-216-295-00	s METAL, CHIP 0 (2012)
R608	1-216-295-00	s METAL, CHIP 0 (2012)
R610	1-216-295-00	s METAL, CHIP 0 (2012)
R612	1-216-295-00	s METAL, CHIP 0 (2012)
R613	1-216-295-00	s METAL, CHIP 0 (2012)
R614	1-216-295-00	s METAL, CHIP 0 (2012)
R616	1-216-295-00	s METAL, CHIP 0 (2012)
R617	1-216-691-11	s METAL, CHIP 47K 0.5% 1/10W (2012)
R618	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)

(DEC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R620	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R621	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R623	1-216-295-00	s METAL, CHIP 0 (2012)
R627	1-216-295-00	s METAL, CHIP 0 (2012)
R628	1-216-295-00	s METAL, CHIP 0 (2012)
R629	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R630	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R631	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R632	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R633	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R634	1-216-295-00	s METAL, CHIP 0 (2012)
R635	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R636	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R637	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R639	1-216-295-00	s METAL, CHIP 0 (2012)
R641	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R642	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R643	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R644	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R645	1-216-295-00	s METAL, CHIP 0 (2012)
R646	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R647	1-216-295-00	s METAL, CHIP 0 (2012)
R648	1-216-295-00	s METAL, CHIP 0 (2012)
R651	1-216-295-00	s METAL, CHIP 0 (2012)
R690	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
RB100	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB101	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB102	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB103	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB104	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB105	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB106	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB107	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB108	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB109	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB110	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB111	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB112	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB300	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB301	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)

DPR-118 BOARD

Ref. No. or Q'ty	Part No.	SP Description
*a:	LOT No. 804 through 901	
*b:	LOT No. 901 and higher	
*c:	LOT No. 804 through 903	
*d:	LOT No. 808 through 903	
*1:	Board No. suffix -11	
*2:	Board No. suffix -12	
1pc	A-8319-263-A	o MOUNTED CIRCUIT BOARD, DPR-118
1pc	1-540-151-21	s SOCKET, PLCC IC 32P (For IC607)
1pc	3-179-084-01	s LEVER (R), PC BOARD
1pc	3-179-085-01	s LEVER (L), PC BOARD
C10	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C11	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C12	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C13	1-128-393-11	s ELECT 100uF 20% 10V
C14	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C15	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C16	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C17	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C18	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C19	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C21	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C22	1-128-393-11	s ELECT 100uF 20% 10V
C23	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C24	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C25	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C27	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C101	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C102	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C103	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C104	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C106	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C107	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C108	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C109	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C110	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C111	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C112	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C113	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C115	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C124	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C125	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C126	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C127	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C128	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C129	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C131	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C132	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C135	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C136	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C137	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C138	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C139	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C140	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C141	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C142	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C143	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C144	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C145	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)

(DPR-118 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C146	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C147	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C149	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C150	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C151	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C152	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C153	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C160	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C161	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C162	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C163	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C200	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C201	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C202	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C203	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C204	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C205	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C206	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C207	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C208	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C209	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C210	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C211	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C212	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C213	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C214	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C215	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C216	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C217	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C218	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C219	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C220	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C221	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C222	*2 1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C225	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C226	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C227	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C228	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C229	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C230	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C231	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C232	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C233	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C234	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C235	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C237	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C238	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C239	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C240	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C241	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C242	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C243	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C244	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C250	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C251	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C252	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C253	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C254	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C280	*2 1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)

(DPR-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description			
C603	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C604	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C605	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C606	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C607	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C608	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C609	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C610	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C611	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C612	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C613	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C614	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C615	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C616	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C617	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C618	1-126-394-11	s	ELECT, CHIP	10uF 20%	16V	
C650	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C651	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C652	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C653	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C654	1-126-394-11	s	ELECT, CHIP	10uF 20%	16V	
C690	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C691	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C692	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C693	*c 1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C800	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C801	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C802	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C803	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C804	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C805	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C806	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C807	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C808	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C809	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C810	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C811	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C812	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C813	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C814	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C815	1-135-070-00	s	TANTALUM, CHIP	0.1uF	10% 35V	(3216)
C816	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C817	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C818	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C819	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C820	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C821	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C822	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C823	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C824	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C825	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C826	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C827	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C880	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C881	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)
C882	1-163-038-00	s	CERAMIC, CHIP	0.1uF	25V	(2012)

(DPR-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C892	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C893	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C900	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C901	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C902	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C903	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C906	1-115-419-11	s	CERAMIC, CHIP 3300pF 5% 25V (2012)
C907	1-115-419-11	s	CERAMIC, CHIP 3300pF 5% 25V (2012)
C908	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C909	1-115-419-11	s	CERAMIC, CHIP 3300pF 5% 25V (2012)
C910	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C911	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C912	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C913	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C914	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C915	1-115-419-11	s	CERAMIC, CHIP 3300pF 5% 25V (2012)
C916	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C918	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C919	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C920	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C921	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C923	*a 1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C925	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C926	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C928	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C929	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C930	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C931	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C932	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C934	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C936	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C937	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C938	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C939	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C941	*c 1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C990	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C991	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1002	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C1003	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C1006	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1007	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1008	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C1010	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1080	*c 1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C1081	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C1082	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C1083	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C1090	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1091	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1093	*c 1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1094	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1095	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1096	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1100	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1101	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1190	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1191	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
CN110	1-778-261-12	o	CONNECTOR, B-B 124P, MALE

(DPR-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN111	1-778-261-12	o	CONNECTOR, B-B 124P, MALE
CN112	1-778-262-12	o	CONNECTOR, B-B 148P, MALE
CP400	1-767-141-21	s	OSC, CRYSTAL 51.39281 MHz
FB400	1-543-309-21	s	BEAD, FERRITE
FL1002	1-233-674-11	s	FERRITE ARRAY, CHIP (8020)
FL1003	1-233-674-11	s	FERRITE ARRAY, CHIP (8020)
FL1004	1-239-719-11	s	FILTER, EMI, CHIP (3225)
FL1005	1-239-719-11	s	FILTER, EMI, CHIP (3225)
FL1006	1-239-719-11	s	FILTER, EMI, CHIP (3225)
FL1007	1-239-719-11	s	FILTER, EMI, CHIP (3225)
FL1008	1-239-719-11	s	FILTER, EMI, CHIP (3225)
FL1009	1-239-719-11	s	FILTER, EMI, CHIP (3225)
FL1010	1-239-719-11	s	FILTER, EMI, CHIP (3225)
FL1090*c	1-233-674-11	s	FERRITE ARRAY, CHIP (8020)
FL1091	1-233-674-11	s	FERRITE ARRAY, CHIP (8020)
FL1092	1-233-674-11	s	FERRITE ARRAY, CHIP (8020)
FL1093	1-233-674-11	s	FERRITE ARRAY, CHIP (8020)
IC100	8-759-524-52	s	IC TC74VHC574FT(EL)
IC101	8-759-524-52	s	IC TC74VHC574FT(EL)
IC103	8-759-524-52	s	IC TC74VHC574FT(EL)
IC104	8-759-524-52	s	IC TC74VHC574FT(EL)
IC105	8-759-524-50	s	IC TC74VHC541FT(EL)
IC106	8-759-456-26	s	IC 74LCX541MTC
IC107	8-759-524-50	s	IC TC74VHC541FT(EL)
IC108	8-759-524-50	s	IC TC74VHC541FT(EL)
IC109	8-759-523-94	s	IC TC74VHC32FT(EL)
IC110	8-759-491-46	s	IC TC74VHCT04AFT
IC111	8-759-524-07	s	IC TC74VHC138FT(EL)
IC112	8-759-524-07	s	IC TC74VHC138FT(EL)
IC113	8-759-386-25	s	IC 74LCX245MTC
IC114	8-759-524-28	s	IC TC74VHC245FT(EL)
IC115	8-759-524-28	s	IC TC74VHC245FT(EL)
IC116	8-759-524-28	s	IC TC74VHC245FT(EL)
IC117	8-759-524-50	s	IC TC74VHC541FT(EL)
IC118	8-759-524-50	s	IC TC74VHC541FT(EL)
IC119	8-759-523-81	s	IC TC74VHC08FT(EL)
IC120	8-759-456-26	s	IC 74LCX541MTC
IC121	8-759-456-26	s	IC 74LCX541MTC
IC122	8-759-456-26	s	IC 74LCX541MTC
IC123	8-759-524-50	s	IC TC74VHC541FT(EL)
IC124	8-759-523-84	s	IC TC74VHC14FT(EL)
IC125	8-759-491-46	s	IC TC74VHCT04AFT
IC126	8-759-524-07	s	IC TC74VHC138FT(EL)
IC127	8-759-524-28	s	IC TC74VHC245FT(EL)
IC128	8-759-456-26	s	IC 74LCX541MTC
IC129	8-759-523-92	s	IC TC74VHC21FT(EL)
IC130	8-759-523-92	s	IC TC74VHC21FT(EL)
IC200	8-759-474-51	s	IC CXD8973BR
IC201	*2 8-759-422-80	s	IC MN47V77ST1
IC202	*2 8-759-577-06	s	IC XC4005XL-3VQ100C
IC205	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC206	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC207	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC208	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC209	8-759-438-84	s	IC CXD9025R
IC250	8-759-524-10	s	IC TC74VHC157FT(EL)

(DPR-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC251	8-759-390-07	s	IC CXD8997R
IC290	8-759-392-01	s	IC TC7SH86FU
IC300	8-759-375-21	s	IC CXD8974AR
IC302	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC303	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC304	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC305	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC307	8-759-386-26	s	IC 74LCX574MTC
IC390	8-759-456-26	s	IC 74LCX541MTC
IC400	8-759-167-20	s	IC UPD42280GU-30
IC401	8-759-167-20	s	IC UPD42280GU-30
IC402	8-759-390-96	s	IC CXD8946Q
IC403	8-759-557-60	s	IC UPD4516161AG5-A10B-9NF
IC404	8-759-491-46	s	IC TC74VHCT04AFT
IC405	8-759-523-95	s	IC TC74VHC74FT(EL)
IC490	8-759-524-50	s	IC TC74VHC541FT(EL)
IC491	8-759-524-50	s	IC TC74VHC541FT(EL)
IC492	8-759-524-50	s	IC TC74VHC541FT(EL)
IC493	8-759-524-50	s	IC TC74VHC541FT(EL)
IC494	8-759-524-50	s	IC TC74VHC541FT(EL)
IC495	8-759-524-50	s	IC TC74VHC541FT(EL)
IC600	8-759-449-09	s	IC CXD8945BR
IC601	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC602	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC603	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC604	*b 8-759-592-51	s	IC XC4028XLA-09HQ208C
	*a 8-759-557-42	s	IC XC4028XL-3HQ208C
IC605	8-759-422-80	s	IC MN47V77ST1
IC606	8-759-422-80	s	IC MN47V77ST1
IC607	*b 8-759-594-43	o	IC AM29F040B-X2VAR/V2.00, FLASH-ROM
	*a 8-759-594-42	o	IC AM29F040B-X2VAR/V1.03, FLASH-ROM
IC608	*c 8-759-422-80	s	IC MN47V77ST1
IC800	8-759-525-59	s	IC CXD9012AR
IC801	8-759-557-60	s	IC UPD4516161AG5-A10B-9NF
IC802	8-759-557-60	s	IC UPD4516161AG5-A10B-9NF
IC880	8-759-524-50	s	IC TC74VHC541FT(EL)
IC881	8-759-524-50	s	IC TC74VHC541FT(EL)
IC882	8-759-524-50	s	IC TC74VHC541FT(EL)
IC883	8-759-524-50	s	IC TC74VHC541FT(EL)
IC890	8-759-524-50	s	IC TC74VHC541FT(EL)
IC891	8-759-524-50	s	IC TC74VHC541FT(EL)
IC892	8-759-524-50	s	IC TC74VHC541FT(EL)
IC893	8-759-524-50	s	IC TC74VHC541FT(EL)
IC900	8-752-381-56	s	IC CXD1095AR
IC901	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC902	8-759-524-18	s	IC TC74VHC163FT(EL)
IC904	8-759-524-50	s	IC TC74VHC541FT(EL)
IC905	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC906	8-759-440-23	s	IC DSPB56007FJ66
IC907	8-759-526-41	s	IC MSM514400DL-60SJDR1
IC908	8-759-440-23	s	IC DSPB56007FJ66
IC909	*c 8-759-526-41	s	IC MSM514400DL-60SJDR1
IC910	8-759-491-46	s	IC TC74VHCT04AFT
IC911	8-759-440-23	s	IC DSPB56007FJ66
IC912	8-759-526-41	s	IC MSM514400DL-60SJDR1
IC913	8-759-440-23	s	IC DSPB56007FJ66
IC915	*c 8-759-526-41	s	IC MSM514400DL-60SJDR1
IC990	8-759-523-95	s	IC TC74VHC74FT(EL)
IC991	8-759-523-94	s	IC TC74VHC32FT(EL)

(DPR-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC992	8-759-524-04	s	IC TC74VHC125FT(EL)
IC1002	8-759-386-26	s	IC 74LCX574MTC
IC1003	8-759-386-26	s	IC 74LCX574MTC
IC1004	8-759-543-66	s	IC SN74LVTH245ANSR
IC1090	8-759-491-46	s	IC TC74VHCT04AFT
IC1091	8-759-524-50	s	IC TC74VHC541FT(EL)
IC1093	8-759-386-26	s	IC 74LCX574MTC
IC1094	8-759-386-26	s	IC 74LCX574MTC
IC1095	8-759-386-26	s	IC 74LCX574MTC
IC1096	8-759-386-26	s	IC 74LCX574MTC
IC1100	8-759-524-50	s	IC TC74VHC541FT(EL)
IC1101	8-759-524-50	s	IC TC74VHC541FT(EL)
IC1190	8-759-524-50	s	IC TC74VHC541FT(EL)
IC1191	8-759-524-50	s	IC TC74VHC541FT(EL)
L10	1-406-864-21	s	COIL, CHOKE 4.7uH
L11	1-406-864-21	s	COIL, CHOKE 4.7uH
L12	1-406-864-21	s	COIL, CHOKE 4.7uH
L13	1-406-864-21	s	COIL, CHOKE 4.7uH
L15	1-406-864-21	s	COIL, CHOKE 4.7uH
L100	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L101	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L103	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L104	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L105	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L106	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L108	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L109	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L110	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L111	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L112	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L160	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L390	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L1002	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L1003	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L1004	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L1090	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L1091	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L1092	1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
L1093	*c 1-410-803-11	s	INDUCTOR, CHIP 0.047uH (3225)
PS11	Δ 1-533-272-11	s	FUSE, CHIP 4A 125V
PS12	Δ 1-533-272-11	s	FUSE, CHIP 4A 125V
PS13	Δ 1-533-272-11	s	FUSE, CHIP 4A 125V
PS15	Δ 1-533-272-11	s	FUSE, CHIP 4A 125V
R100	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R101	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R102	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R103	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R104	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R105	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R106	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R107	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R108	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R109	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R110	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R111	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R112	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R113	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R114	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)

(DPR-118 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R192	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R193	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R194	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R195	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R196	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R197	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R198	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R200	1-216-295-00	s METAL, CHIP 0 (2012)
R201	*2 1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R202	*2 1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R203	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R204	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R205	1-216-295-00	s METAL, CHIP 0 (2012)
R206	1-216-295-00	s METAL, CHIP 0 (2012)
R207	1-216-295-00	s METAL, CHIP 0 (2012)
R208	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W (2012)
R209	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W (2012)
R210	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R211	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W (2012)
R212	*2 1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R213	*2 1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R214	*2 1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R215	*2 1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R216	*2 1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R302	1-216-295-00	s METAL, CHIP 0 (2012)
R307	1-216-295-00	s METAL, CHIP 0 (2012)
R308	1-216-295-00	s METAL, CHIP 0 (2012)
R309	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R310	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R311	1-216-295-00	s METAL, CHIP 0 (2012)
R312	1-216-295-00	s METAL, CHIP 0 (2012)
R313	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W (2012)
R314	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R315	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W (2012)
R326	1-216-295-00	s METAL, CHIP 0 (2012)
R390	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R391	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R392	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R393	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R394	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R395	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R396	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R400	1-216-295-00	s METAL, CHIP 0 (2012)
R401	1-216-295-00	s METAL, CHIP 0 (2012)
R402	1-216-295-00	s METAL, CHIP 0 (2012)
R403	1-216-295-00	s METAL, CHIP 0 (2012)
R404	1-216-295-00	s METAL, CHIP 0 (2012)
R405	1-216-295-00	s METAL, CHIP 0 (2012)
R406	1-216-295-00	s METAL, CHIP 0 (2012)
R407	1-216-295-00	s METAL, CHIP 0 (2012)
R408	1-216-295-00	s METAL, CHIP 0 (2012)
R414	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R415	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R416	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R417	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R430	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R480	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R481	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R490	1-216-295-00	s METAL, CHIP 0 (2012)

(DPR-118 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R910	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R911	1-216-001-00	s	METAL, CHIP 10 5% 1/10W (2012)
R912	1-216-001-00	s	METAL, CHIP 10 5% 1/10W (2012)
R914	1-216-001-00	s	METAL, CHIP 10 5% 1/10W (2012)
R915	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R916	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R917	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R918	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R919	1-216-001-00	s	METAL, CHIP 10 5% 1/10W (2012)
R920	1-216-001-00	s	METAL, CHIP 10 5% 1/10W (2012)
R921	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R922	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R923	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R924	1-216-001-00	s	METAL, CHIP 10 5% 1/10W (2012)
R926	1-216-295-00	s	METAL, CHIP 0 (2012)
R927	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R928	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R929	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R930	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R931	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R932	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R933	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R935	1-216-295-00	s	METAL, CHIP 0 (2012)
R960	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R961	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R962	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R963	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R980	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R991	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R992	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R993	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R1000	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R1002	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R1007	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R1008	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R1010	1-216-295-00	s	METAL, CHIP 0 (2012)
R1011	1-216-295-00	s	METAL, CHIP 0 (2012)
R1012	1-216-295-00	s	METAL, CHIP 0 (2012)
R1070	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R1071	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R1090	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1091	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1092	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1093	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1094	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R1095	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R1096	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1097	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R1098	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R1100	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R1101	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R1102	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R1103	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R1180	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1181	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1182	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1183	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1190	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R1191	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)

(DPR-118 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1193	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1194	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1195	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1196	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1197	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1198	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1199	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
RB100	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB102	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB104	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB105	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB106	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB107	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB108	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB110	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB111	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB113	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB203	*2 1-239-711-11	s RES, NETWORK, CHIP 0x4 (3216)
RB204	*2 1-239-711-11	s RES, NETWORK, CHIP 0x4 (3216)
RB205	*2 1-239-711-11	s RES, NETWORK, CHIP 0x4 (3216)
RB900	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB901	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB902	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB903	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB905	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB906	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB907	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB908	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB909	1-239-389-11	s RES, NETWORK, CHIP 47Kx4 (3216)
RB910	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB911	1-239-389-11	s RES, NETWORK, CHIP 47Kx4 (3216)
RB912	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB913	1-239-389-11	s RES, NETWORK, CHIP 47Kx4 (3216)
RB914	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB915	1-239-389-11	s RES, NETWORK, CHIP 47Kx4 (3216)
RB916	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB1090	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1091	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1092	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB1093	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB1100	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB1101	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1102	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1103	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1104	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1109	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1110	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1111	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1112	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1113	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1114	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1115	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1116	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1117	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1118	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1119	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB1190	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1191	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)

(DPR-118 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB1192	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1193	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1194	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)
RB1195	1-239-409-11	s RES, NETWORK, CHIP 47x4 (3216)

DR-315 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8323-252-A	o MOUNTED CIRCUIT BOARD, DR-315K(75)
1pc	3-701-822-01	s HOLDER, WIRE
3pcs	7-685-871-01	s SCREW +BVT 3x6 (S)
4pcs	3-603-399-01	o SHEET, RADIATION
4pcs	3-696-737-01	o BRACKET, TRANSISTOR
1pc	7-682-548-09	s SCREW +B 3x8
1pc	7-684-023-04	s NUT M3, TYPE 2
7pcs	7-685-871-01	s SCREW +BVT 3x6 (S)
C1	1-104-919-11	s TANTALUM, CHIP 10uF 20% 25V (6032)
C2	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V (2012)
C3	1-104-919-11	s TANTALUM, CHIP 10uF 20% 25V (6032)
C4	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C5	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C7	1-163-017-00	s CERAMIC, CHIP 4700pF 10% 50V (2012)
C8	1-111-062-11	s ELECT 270uF 20% 25V
C9	1-111-059-11	s ELECT 220uF 20% 25V
C101	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C102	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C103	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C104	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C105	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C106	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V (2012)
C107	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C108	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C109	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C111	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C112	1-111-059-11	s ELECT 220uF 20% 25V
C113	1-111-059-11	s ELECT 220uF 20% 25V
C114	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C115	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C116	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C117	1-130-497-00	s MYLAR 0.15uF 5% 50V
C118	1-130-497-00	s MYLAR 0.15uF 5% 50V
C119	1-115-827-11	s ELECT 56uF 20% 50V
C120	1-163-275-11	s CERAMIC, CHIP 1000pF 5% 50V (2012)
C121	1-163-275-11	s CERAMIC, CHIP 1000pF 5% 50V (2012)
C122	1-104-851-11	s TANTALUM, CHIP 10uF 20% 10V (3216)
C123	1-104-851-11	s TANTALUM, CHIP 10uF 20% 10V (3216)
C124	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V (2012)
C125	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V (2012)
C126	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C127	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C128	1-115-827-11	s ELECT 56uF 20% 50V
C129	1-115-827-11	s ELECT 56uF 20% 50V
C130	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C131	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C132	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C133	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C134	1-163-009-11	s CERAMIC, CHIP 1000pF 10% 50V (2012)
C135	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C200	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C201	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C202	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C203	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C204	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C205	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C206	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C207	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)

(DR-315 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C208	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C209	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C210	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C211	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C212	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C213	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C214	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C215	1-111-059-11	s ELECT 220uF 20% 25V
C216	1-111-059-11	s ELECT 220uF 20% 25V
C217	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C218	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C219	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C301	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C302	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C303	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C304	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C305	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C306	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C307	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C308	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C309	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C310	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C311	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C312	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C313	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C314	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C315	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C316	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C317	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C318	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C319	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C320	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C321	1-126-964-11	s ELECT 10uF 20% 50V
C322	1-126-964-11	s ELECT 10uF 20% 50V
C323	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C324	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C325	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C326	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C327	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C328	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C329	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C330	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C331	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C332	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C333	1-111-107-11	s ELECT 10uF 20% 50V
C334	1-111-107-11	s ELECT 10uF 20% 50V
C335	1-111-107-11	s ELECT 10uF 20% 50V
C336	1-111-107-11	s ELECT 10uF 20% 50V
C337	1-111-107-11	s ELECT 10uF 20% 50V
C338	1-111-107-11	s ELECT 10uF 20% 50V
C339	1-111-107-11	s ELECT 10uF 20% 50V
C340	1-111-107-11	s ELECT 10uF 20% 50V
C341	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C342	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C343	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C344	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C345	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C346	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C347	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)

(DR-315 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C348	1-115-339-11	s	CERAMIC, CHIP 0.1uF 10% 50V (2012)
C349	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C350	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C351	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C352	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C353	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C354	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C355	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C356	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C357	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C358	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C359	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C360	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C361	1-115-339-11	s	CERAMIC, CHIP 0.1uF 10% 50V (2012)
C362	1-115-339-11	s	CERAMIC, CHIP 0.1uF 10% 50V (2012)
C363	1-115-339-11	s	CERAMIC, CHIP 0.1uF 10% 50V (2012)
C364	1-115-339-11	s	CERAMIC, CHIP 0.1uF 10% 50V (2012)
C365	1-115-339-11	s	CERAMIC, CHIP 0.1uF 10% 50V (2012)
C366	1-115-339-11	s	CERAMIC, CHIP 0.1uF 10% 50V (2012)
C367	1-115-339-11	s	CERAMIC, CHIP 0.1uF 10% 50V (2012)
C368	1-115-339-11	s	CERAMIC, CHIP 0.1uF 10% 50V (2012)
C369	1-115-339-11	s	CERAMIC, CHIP 0.1uF 10% 50V (2012)
C401	1-111-107-11	s	ELECT 10uF 20% 50V
C402	1-111-107-11	s	ELECT 10uF 20% 50V
C403	1-107-906-11	s	ELECT 10uF 20% 50V
C404	1-107-906-11	s	ELECT 10uF 20% 50V
C405	1-107-906-11	s	ELECT 10uF 20% 50V
C406	1-111-107-11	s	ELECT 10uF 20% 50V
C407	1-111-107-11	s	ELECT 10uF 20% 50V
C408	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C409	1-163-021-11	s	CERAMIC, CHIP 0.01uF 10% 50V (2012)
C410	1-107-906-11	s	ELECT 10uF 20% 50V
C411	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C412	1-107-888-11	s	ELECT 47uF 20% 25V
C413	1-107-888-11	s	ELECT 47uF 20% 25V
C414	1-163-021-11	s	CERAMIC, CHIP 0.01uF 10% 50V (2012)
C415	1-163-021-11	s	CERAMIC, CHIP 0.01uF 10% 50V (2012)
CN101	1-580-837-11	o	CONNECTOR, PC BOARD 3P, MALE
CN102	1-580-702-11	s	CONNECTOR, FPC/FFC 24P
CN103	1-580-702-11	s	CONNECTOR, FPC/FFC 24P
CN111	1-580-540-11	o	CONNECTOR, PC BOARD 22P, MALE
CN112	1-564-013-11	o	CONNECTOR, 3P, MALE
D1	8-719-974-51	s	DIODE SB20-03P
D101	8-719-974-51	s	DIODE SB20-03P
D102	8-719-104-34	s	DIODE 1S2835
D103	8-719-104-34	s	DIODE 1S2835
D201	8-719-104-34	s	DIODE 1S2835
D202	8-719-801-48	s	DIODE 1SS193
D203	8-719-974-51	s	DIODE SB20-03P
D301	8-719-104-34	s	DIODE 1S2835
D302	8-719-104-34	s	DIODE 1S2835
D303	8-719-801-48	s	DIODE 1SS193
D304	8-719-801-48	s	DIODE 1SS193
D305	8-719-801-48	s	DIODE 1SS193
D306	8-719-801-48	s	DIODE 1SS193
D307	8-719-801-48	s	DIODE 1SS193
D308	8-719-801-48	s	DIODE 1SS193
D309	8-719-801-48	s	DIODE 1SS193

(DR-315 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D310	8-719-801-48	s	DIODE 1SS193
D401	8-719-974-51	s	DIODE SB20-03P
D402	8-719-210-33	s	DIODE EC10DS2
D403	8-719-210-33	s	DIODE EC10DS2
D404	8-719-210-33	s	DIODE EC10DS2
D405	8-719-210-33	s	DIODE EC10DS2
D406	8-719-210-33	s	DIODE EC10DS2
D407	8-719-210-33	s	DIODE EC10DS2
D408	8-719-157-33	s	DIODE RD6.2M-B
IC1	8-759-700-07	s	IC NJM2903M
IC2	8-759-929-26	s	IC TL431CPS
IC3	8-759-983-69	s	IC LM358PS
IC101	8-759-009-04	s	IC MC14050BF
IC102	8-759-906-22	s	IC MB3759PF
IC103	8-759-983-69	s	IC LM358PS
IC104	8-759-700-07	s	IC NJM2903M
IC105	8-759-112-58	s	IC UPC1246G
IC106	8-759-700-07	s	IC NJM2903M
IC107	8-759-925-80	s	IC SN74HC14ANS
IC202	8-759-981-48	s	IC TL082M
IC203	8-759-906-22	s	IC MB3759PF
IC205	8-759-175-68	s	IC HD29029FP
IC206	8-759-112-66	s	IC UPC812G2
IC302	8-759-981-48	s	IC TL082M
IC303	8-759-981-48	s	IC TL082M
IC304	8-759-906-22	s	IC MB3759PF
IC305	8-759-906-22	s	IC MB3759PF
IC306	8-759-009-03	s	IC MC14049UBF
IC307	8-759-009-03	s	IC MC14049UBF
IC308	8-759-175-68	s	IC HD29029FP
IC309	8-759-175-68	s	IC HD29029FP
IC310	8-759-175-68	s	IC HD29029FP
IC311	8-759-175-68	s	IC HD29029FP
IC312	8-759-981-48	s	IC TL082M
IC313	8-759-009-03	s	IC MC14049UBF
IC402	8-759-205-56	s	IC TA7267P
IC403	8-759-205-56	s	IC TA7267P
IC404	8-759-205-56	s	IC TA7267P
L1	1-408-519-00	s	COIL, CHOKE
L2	1-414-487-81	s	INDUCTOR 1.0uH
L102	1-406-749-11	s	COIL
L201	1-406-977-21	s	COIL, CHOKE 100uH
L301	1-406-977-21	s	COIL, CHOKE 100uH
L302	1-406-977-21	s	COIL, CHOKE 100uH
L303	1-406-977-21	s	COIL, CHOKE 100uH
L304	1-406-977-21	s	COIL, CHOKE 100uH
L401	1-406-977-21	s	COIL, CHOKE 100uH
PS1	△ 1-533-275-21	s	FUSE, CHIP 5A 125V
Q1	8-729-029-14	s	TRANSISTOR DTC144EUA
Q2	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q3	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q4	8-729-035-62	s	TRANSISTOR 2SJ418
Q101	8-729-029-14	s	TRANSISTOR DTC144EUA
Q102	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q103	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q104	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q105	8-729-035-62	s	TRANSISTOR 2SJ418
Q106	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6

(DR-315 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q107	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q108	8-729-035-62	s	TRANSISTOR 2SJ418
Q109	8-729-036-04	s	TRANSISTOR 2SK2046
Q110	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q111	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q112	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q113	8-729-035-62	s	TRANSISTOR 2SJ418
Q114	8-729-036-04	s	TRANSISTOR 2SK2046
Q116	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q117	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q118	8-729-035-62	s	TRANSISTOR 2SJ418
Q119	8-729-036-04	s	TRANSISTOR 2SK2046
Q120	8-729-029-14	s	TRANSISTOR DTC144EUA
Q121	8-729-029-14	s	TRANSISTOR DTC144EUA
Q122	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q201	8-729-035-62	s	TRANSISTOR 2SJ418
Q301	8-729-029-14	s	TRANSISTOR DTC144EUA
Q302	8-729-029-14	s	TRANSISTOR DTC144EUA
Q303	8-729-029-14	s	TRANSISTOR DTC144EUA
Q304	8-729-029-14	s	TRANSISTOR DTC144EUA
Q305	8-729-035-62	s	TRANSISTOR 2SJ418
Q306	8-729-036-04	s	TRANSISTOR 2SK2046
Q307	8-729-035-62	s	TRANSISTOR 2SJ418
Q308	8-729-036-04	s	TRANSISTOR 2SK2046
Q309	8-729-035-62	s	TRANSISTOR 2SJ418
Q310	8-729-036-04	s	TRANSISTOR 2SK2046
Q311	8-729-035-62	s	TRANSISTOR 2SJ418
Q312	8-729-036-04	s	TRANSISTOR 2SK2046
Q400	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q401	8-729-029-14	s	TRANSISTOR DTC144EUA
Q402	8-729-035-62	s	TRANSISTOR 2SJ418
Q403	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q404	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q405	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q406	8-729-035-62	s	TRANSISTOR 2SJ418
Q407	8-729-101-07	s	TRANSISTOR 2SB798-DL
R1	1-216-113-00	s	METAL, CHIP 470K 5% 1/10W (2012)
R2	1-216-113-00	s	METAL, CHIP 470K 5% 1/10W (2012)
R3	1-216-115-00	s	METAL, CHIP 560K 5% 1/10W (2012)
R4	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R5	1-216-065-00	s	METAL, CHIP 4.7K 5% 1/10W (2012)
R6	1-216-089-00	s	METAL, CHIP 47K 5% 1/10W (2012)
R7	1-216-659-11	s	METAL, CHIP 2.2K 0.5% 1/10W (2012)
R8	1-216-659-11	s	METAL, CHIP 2.2K 0.5% 1/10W (2012)
R9	1-216-089-00	s	METAL, CHIP 47K 5% 1/10W (2012)
R10	1-216-105-11	s	METAL, CHIP 220K 5% 1/10W (2012)
R11	1-216-105-11	s	METAL, CHIP 220K 5% 1/10W (2012)
R12	1-216-695-11	s	METAL, CHIP 68K 0.5% 1/10W (2012)
R13	1-216-099-00	s	METAL, CHIP 120K 5% 1/10W (2012)
R14	1-216-091-00	s	METAL, CHIP 56K 5% 1/10W (2012)
R15	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W (2012)
R16	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R17	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W (2012)
R18	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W (2012)
R19	1-216-675-11	s	METAL, CHIP 10K 0.5% 1/10W (2012)
R20	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R21	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R22	1-216-047-00	s	METAL, CHIP 820 5% 1/10W (2012)

(DR-315 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R23	1-216-385-11	s	METAL 0.47 5% 3W
R100	1-216-089-00	s	METAL, CHIP 47K 5% 1/10W (2012)
R101	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R102	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R103	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R104	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R105	1-216-065-00	s	METAL, CHIP 4.7K 5% 1/10W (2012)
R106	1-216-065-00	s	METAL, CHIP 4.7K 5% 1/10W (2012)
R107	1-216-065-00	s	METAL, CHIP 4.7K 5% 1/10W (2012)
R108	1-216-089-00	s	METAL, CHIP 47K 5% 1/10W (2012)
R109	1-216-109-00	s	METAL, CHIP 330K 5% 1/10W (2012)
R110	1-216-075-00	s	METAL, CHIP 12K 5% 1/10W (2012)
R111	1-216-091-00	s	METAL, CHIP 56K 5% 1/10W (2012)
R112	1-216-083-00	s	METAL, CHIP 27K 5% 1/10W (2012)
R113	1-216-089-00	s	METAL, CHIP 47K 5% 1/10W (2012)
R114	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R115	1-216-085-00	s	METAL, CHIP 33K 5% 1/10W (2012)
R116	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R117	1-216-065-00	s	METAL, CHIP 4.7K 5% 1/10W (2012)
R118	1-216-065-00	s	METAL, CHIP 4.7K 5% 1/10W (2012)
R119	1-216-069-00	s	METAL, CHIP 6.8K 5% 1/10W (2012)
R120	1-216-069-00	s	METAL, CHIP 6.8K 5% 1/10W (2012)
R121	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R122	1-216-033-00	s	METAL, CHIP 220 5% 1/10W (2012)
R123	1-216-081-00	s	METAL, CHIP 22K 5% 1/10W (2012)
R124	1-216-089-00	s	METAL, CHIP 47K 5% 1/10W (2012)
R125	1-219-684-11	s	RES 0.01 10% 1W
R126	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R127	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R128	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R129	1-216-099-00	s	METAL, CHIP 120K 5% 1/10W (2012)
R130	1-216-067-00	s	METAL, CHIP 5.6K 5% 1/10W (2012)
R131	1-216-067-00	s	METAL, CHIP 5.6K 5% 1/10W (2012)
R132	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R133	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R134	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R135	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R136	1-216-081-00	s	METAL, CHIP 22K 5% 1/10W (2012)
R137	1-216-071-00	s	METAL, CHIP 8.2K 5% 1/10W (2012)
R138	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R139	1-216-085-00	s	METAL, CHIP 33K 5% 1/10W (2012)
R140	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R141	1-216-121-00	s	METAL, CHIP 1.0M 5% 1/10W (2012)
R142	1-216-109-00	s	METAL, CHIP 330K 5% 1/10W (2012)
R143	1-216-089-00	s	METAL, CHIP 47K 5% 1/10W (2012)
R144	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R145	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R146	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R147	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R148	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R149	1-216-081-00	s	METAL, CHIP 22K 5% 1/10W (2012)
R150	1-216-089-00	s	METAL, CHIP 47K 5% 1/10W (2012)
R151	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R152	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R153	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R154	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R155	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R156	1-216-099-00	s	METAL, CHIP 120K 5% 1/10W (2012)
R157	1-216-071-00	s	METAL, CHIP 8.2K 5% 1/10W (2012)

(DR-315 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R158	1-216-071-00	s METAL, CHIP 8.2K 5% 1/10W (2012)
R159	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R160	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R161	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R162	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R163	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R164	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R200	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R201	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R202	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R203	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R204	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R205	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R206	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R207	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R208	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R209	1-216-117-00	s METAL, CHIP 680K 5% 1/10W (2012)
R210	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R211	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R212	1-216-045-00	s METAL, CHIP 680 5% 1/10W (2012)
R213	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R214	1-216-113-00	s METAL, CHIP 470K 5% 1/10W (2012)
R215	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R216	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R217	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R218	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R220	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R221	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R222	1-216-691-11	s METAL, CHIP 47K 0.5% 1/10W (2012)
R223	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R224	1-216-691-11	s METAL, CHIP 47K 0.5% 1/10W (2012)
R225	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R226	1-216-365-00	s METAL 0.47 5% 2W
R301	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R302	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R303	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R304	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R305	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R306	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R307	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R308	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R309	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R310	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R311	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R312	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R313	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R314	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R315	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R316	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R317	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R318	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R319	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R320	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R321	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R322	1-216-045-00	s METAL, CHIP 680 5% 1/10W (2012)
R323	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R324	1-216-045-00	s METAL, CHIP 680 5% 1/10W (2012)
R325	1-216-059-00	s METAL, CHIP 2.7K 5% 1/10W (2012)
R326	1-216-059-00	s METAL, CHIP 2.7K 5% 1/10W (2012)

(DR-315 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R327	1-216-107-00	s METAL, CHIP 270K 5% 1/10W (2012)
R328	1-216-107-00	s METAL, CHIP 270K 5% 1/10W (2012)
R329	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R330	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R331	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R332	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R333	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R334	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R335	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R336	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R337	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R338	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R339	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R340	1-216-001-00	s METAL, CHIP 10 5% 1/10W (2012)
R341	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R342	1-216-001-00	s METAL, CHIP 10 5% 1/10W (2012)
R343	1-216-071-00	s METAL, CHIP 8.2K 5% 1/10W (2012)
R344	1-216-071-00	s METAL, CHIP 8.2K 5% 1/10W (2012)
R345	1-216-071-00	s METAL, CHIP 8.2K 5% 1/10W (2012)
R346	1-216-071-00	s METAL, CHIP 8.2K 5% 1/10W (2012)
R347	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R348	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R349	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R350	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R351	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R352	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R353	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R354	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R355	1-216-071-00	s METAL, CHIP 8.2K 5% 1/10W (2012)
R356	1-216-071-00	s METAL, CHIP 8.2K 5% 1/10W (2012)
R357	1-216-071-00	s METAL, CHIP 8.2K 5% 1/10W (2012)
R358	1-216-071-00	s METAL, CHIP 8.2K 5% 1/10W (2012)
R359	1-216-693-11	s METAL, CHIP 56K 0.5% 1/10W (2012)
R360	1-216-693-11	s METAL, CHIP 56K 0.5% 1/10W (2012)
R361	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R362	1-216-693-11	s METAL, CHIP 56K 0.5% 1/10W (2012)
R363	1-216-693-11	s METAL, CHIP 56K 0.5% 1/10W (2012)
R364	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R365	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R366	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R367	1-216-365-00	s METAL 0.47 5% 2W
R368	1-216-365-00	s METAL 0.47 5% 2W
R400	1-216-047-00	s METAL, CHIP 820 5% 1/10W (2012)
R401	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R402	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R403	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R404	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R405	1-216-047-00	s METAL, CHIP 820 5% 1/10W (2012)
R406	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R407	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R408	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R409	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R410	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R411	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R412	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R413	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R414	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R415	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R416	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)

(DR-315 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R417	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R418	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R419	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R420	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R421	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R422	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R423	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R424	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R425	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R426	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R427	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R428	1-216-669-11	s METAL, CHIP 5.6K 0.5% 1/10W (2012)
R429	1-214-789-00	s METAL 0.1 10% 5W

EQ-75 BOARD

Ref. No. or Q'ty	Part No.	SP Description
lpc	A-8319-273-A	o MOUNTED CIRCUIT BOARD, EQ-75
lpc	3-179-084-01	s LEVER (R), PC BOARD
lpc	3-179-085-01	s LEVER (L), PC BOARD
C5	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C6	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C7	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C8	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C100	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C101	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C103	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C104	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C105	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C107	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C108	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C109	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C110	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C200	1-164-315-11	s CERAMIC, CHIP 470pF 5% 50V (1608)
C201	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C202	1-164-315-11	s CERAMIC, CHIP 470pF 5% 50V (1608)
C203	1-126-392-11	s ELECT, CHIP 100uF 20% 6.3V
C204	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C205	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C206	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C207	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C208	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C209	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C210	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C211	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C212	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C218	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C219	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C221	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C222	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C223	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C224	1-162-915-11	s CERAMIC, CHIP 10pF 50V (1608)
C225	1-162-915-11	s CERAMIC, CHIP 10pF 50V (1608)
C226	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C500	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C501	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C502	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C503	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C504	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C505	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C506	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C507	1-164-315-11	s CERAMIC, CHIP 470pF 5% 50V (1608)
C508	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C509	1-162-919-11	s CERAMIC, CHIP 22pF 5% 50V (1608)
C510	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C511	1-162-920-11	s CERAMIC, CHIP 27pF 5% 50V (1608)
C512	1-162-919-11	s CERAMIC, CHIP 22pF 5% 50V (1608)
C513	1-162-916-11	s CERAMIC, CHIP 12pF 5% 50V (1608)
C514	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)
C515	1-162-970-11	s CERAMIC, CHIP 0.01uF 10% 25V (1608)
C516	1-164-315-11	s CERAMIC, CHIP 470pF 5% 50V (1608)
C517	1-164-315-11	s CERAMIC, CHIP 470pF 5% 50V (1608)
C518	1-162-910-11	s CERAMIC, CHIP 5pF 50V (1608)
C519	1-162-916-11	s CERAMIC, CHIP 12pF 5% 50V (1608)
C520	1-164-156-11	s CERAMIC, CHIP 0.1uF 25V (1608)

(EQ-75 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C623	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C624	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C625	1-164-315-11	s	CERAMIC, CHIP 470pF 5% 50V (1608)
C626	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C627	1-162-919-11	s	CERAMIC, CHIP 22pF 5% 50V (1608)
C628	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C629	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C631	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C632	1-164-217-11	s	CERAMIC, CHIP 150pF 5% 50V (1608)
C633	1-162-964-11	s	CERAMIC, CHIP 1000pF 10% 50V (1608)
C634	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C635	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C636	1-162-927-11	s	CERAMIC, CHIP 100pF 5% 50V (1608)
C637	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C638	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C639	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C640	1-162-927-11	s	CERAMIC, CHIP 100pF 5% 50V (1608)
C641	1-162-927-11	s	CERAMIC, CHIP 100pF 5% 50V (1608)
C642	1-162-927-11	s	CERAMIC, CHIP 100pF 5% 50V (1608)
C643	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C644	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C645	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C646	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C647	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C648	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C649	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C650	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C655	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C656	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C657	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C658	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C659	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C660	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C661	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C718	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C719	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C720	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C721	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C726	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C727	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C728	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C729	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C731	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C732	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C733	1-126-399-11	s	ELECT, CHIP 10uF 20% 35V
C734	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C742	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C743	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C744	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C745	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C752	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C753	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C754	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C755	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C800	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C801	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C802	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C803	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C804	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)

(EQ-75 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1551	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1552	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C1553	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C1554	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1555	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1556	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1558	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1561	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C1605	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1606	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1607	1-164-315-11	s	CERAMIC, CHIP 470pF 5% 50V (1608)
C1608	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1609	1-162-919-11	s	CERAMIC, CHIP 22pF 5% 50V (1608)
C1610	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C1611	1-162-920-11	s	CERAMIC, CHIP 27pF 5% 50V (1608)
C1612	1-162-919-11	s	CERAMIC, CHIP 22pF 5% 50V (1608)
C1613	1-162-916-11	s	CERAMIC, CHIP 12pF 5% 50V (1608)
C1614	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1615	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C1616	1-164-315-11	s	CERAMIC, CHIP 470pF 5% 50V (1608)
C1617	1-164-315-11	s	CERAMIC, CHIP 470pF 5% 50V (1608)
C1618	1-162-910-11	s	CERAMIC, CHIP 5pF 50V (1608)
C1619	1-162-916-11	s	CERAMIC, CHIP 12pF 5% 50V (1608)
C1620	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1621	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C1622	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C1623	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1624	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1625	1-164-315-11	s	CERAMIC, CHIP 470pF 5% 50V (1608)
C1626	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1627	1-162-919-11	s	CERAMIC, CHIP 22pF 5% 50V (1608)
C1628	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1629	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C1631	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1632	1-164-217-11	s	CERAMIC, CHIP 150pF 5% 50V (1608)
C1633	1-162-964-11	s	CERAMIC, CHIP 1000pF 10% 50V (1608)
C1634	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1635	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C1636	1-162-927-11	s	CERAMIC, CHIP 100pF 5% 50V (1608)
C1637	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1639	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1640	1-162-927-11	s	CERAMIC, CHIP 100pF 5% 50V (1608)
C1641	1-162-927-11	s	CERAMIC, CHIP 100pF 5% 50V (1608)
C1642	1-162-927-11	s	CERAMIC, CHIP 100pF 5% 50V (1608)
C1643	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1644	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1645	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1647	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1648	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C1649	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1650	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
C1655	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1656	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1657	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1658	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1660	1-164-156-11	s	CERAMIC, CHIP 0.1uF 25V (1608)
C1661	1-162-970-11	s	CERAMIC, CHIP 0.01uF 10% 25V (1608)
CN100	1-506-471-11	o	CONNECTOR, 6P, MALE

(EQ-75 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN108	1-778-261-12	o	CONNECTOR, B-B 124P, MALE
CN109	1-778-261-12	o	CONNECTOR, B-B 124P, MALE
CN500	1-506-469-11	s	CONNECTOR, 4P, MALE
CN600	1-506-469-11	s	CONNECTOR, 4P, MALE
CN900	1-506-486-31	o	CONNECTOR, 7P, MALE
CN1500	1-506-469-11	o	CONNECTOR, 4P, MALE
CN1600	1-506-469-11	o	CONNECTOR, 4P, MALE
D500	8-719-157-36	s	DIODE RD6.8M-B
D900	8-719-026-16	s	LED CL-150D-CD, ORG
D901	8-719-941-23	s	DIODE DA204U
D902	8-719-941-23	s	DIODE DA204U
D903	8-719-989-22	s	LED CL-150R-CD, RED
D904	8-719-047-59	s	LED CL-150G-CD, GRN
DL500	1-411-788-11	s	DELAY LINE
DL600	1-411-788-11	s	DELAY LINE
DL1500	1-411-788-11	s	DELAY LINE
DL1600	1-411-788-11	s	DELAY LINE
FL800	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL801	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL802	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL803	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL804	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL805	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL806	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL807	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL808	1-239-898-22	s	FILTER, EMI, CHIP (2012)
FL809	1-239-898-22	s	FILTER, EMI, CHIP (2012)
IC100	8-759-491-46	s	IC TC74VHCT04AFT
IC101	8-759-523-78	s	IC TC74VHC00FT(EL)
IC102	8-759-491-46	s	IC TC74VHCT04AFT
IC103	8-759-523-78	s	IC TC74VHC00FT(EL)
IC104	8-759-523-78	s	IC TC74VHC00FT(EL)
IC105	8-759-523-78	s	IC TC74VHC00FT(EL)
IC106	8-759-523-81	s	IC TC74VHC08FT(EL)
IC107	8-759-390-93	s	IC CXD8979R
IC200	8-759-049-96	s	IC SN74HC32APW
IC201	8-752-075-37	s	IC CXA3054R
IC202	8-759-234-08	s	IC TA78L05F
IC203	8-759-446-74	s	IC TA79L05F
IC204	8-759-386-25	s	IC 74LCX245MTC
IC205	8-759-635-27	s	IC M62352GP
IC500	8-759-635-27	s	IC M62352GP
IC501	8-759-635-27	s	IC M62352GP
IC502	8-759-441-31	s	IC MC14053BD
IC503	8-752-075-38	s	IC CXA3053R
IC505	8-759-112-53	s	IC UPC1663G
IC506	8-759-234-08	s	IC TA78L05F
IC507	8-759-446-74	s	IC TA79L05F
IC508	8-752-075-40	s	IC CXA3051R
IC509	8-759-234-08	s	IC TA78L05F
IC601	8-759-635-27	s	IC M62352GP
IC602	8-759-441-31	s	IC MC14053BD
IC603	8-752-075-38	s	IC CXA3053R
IC606	8-759-234-08	s	IC TA78L05F
IC607	8-759-446-74	s	IC TA79L05F
IC608	8-752-075-40	s	IC CXA3051R
IC609	8-759-234-08	s	IC TA78L05F

(EQ-75 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC703	8-759-386-25	s IC 74LCX245MTC
IC704	8-759-359-66	s IC TL082CPW
IC705	8-759-359-66	s IC TL082CPW
IC706	8-759-359-66	s IC TL082CPW
IC707	8-759-359-66	s IC TL082CPW
IC708	8-759-441-31	s IC MC14053BD
IC800	8-759-441-31	s IC MC14053BD
IC801	8-759-390-95	s IC CXD8944Q
IC802	8-759-386-25	s IC 74LCX245MTC
IC803	8-759-441-31	s IC MC14053BD
IC804	8-759-359-66	s IC TL082CPW
IC805	8-759-359-66	s IC TL082CPW
IC806	8-759-359-66	s IC TL082CPW
IC807	8-759-359-66	s IC TL082CPW
IC808	8-759-441-31	s IC MC14053BD
IC809	8-759-234-08	s IC TA78L05F
IC810	8-759-446-74	s IC TA79L05F
IC811	8-759-196-97	s IC TC7SH32FU
IC900	8-759-392-62	s IC NM24C16LEM8
IC901	8-759-524-27	s IC TC74VHC244FT(EL)
IC902	8-759-049-86	s IC SN74HCT244APW
IC903	8-759-441-31	s IC MC14053BD
IC904	8-759-441-31	s IC MC14053BD
IC905	8-759-441-31	s IC MC14053BD
IC906	8-759-510-71	s IC BA10358F
IC907	8-759-441-31	s IC MC14053BD
IC908	8-759-642-26	s IC HD6433437WV10X
IC909	8-759-491-46	s IC TC74VHCT04AFT
IC910	8-759-082-53	s IC TLC274CPW
IC911	8-759-082-53	s IC TLC274CPW
IC1502	8-759-441-31	s IC MC14053BD
IC1503	8-752-075-38	s IC CXA3053R
IC1505	8-759-112-53	s IC UPC1663G
IC1506	8-759-234-08	s IC TA78L05F
IC1508	8-752-075-40	s IC CXA3051R
IC1509	8-759-234-08	s IC TA78L05F
IC1602	8-759-441-31	s IC MC14053BD
IC1603	8-752-075-38	s IC CXA3053R
IC1606	8-759-234-08	s IC TA78L05F
IC1608	8-752-075-40	s IC CXA3051R
IC1609	8-759-234-08	s IC TA78L05F
L200	1-410-377-31	s INDUCTOR, CHIP 4.7uH (3225)
L500	1-412-140-31	s INDUCTOR, CHIP 1.8uH (3225)
L501	1-412-140-31	s INDUCTOR, CHIP 1.8uH (3225)
L600	1-412-140-31	s INDUCTOR, CHIP 1.8uH (3225)
L601	1-412-140-31	s INDUCTOR, CHIP 1.8uH (3225)
L700	1-410-377-31	s INDUCTOR, CHIP 4.7uH (3225)
L1500	1-412-140-31	s INDUCTOR, CHIP 1.8uH (3225)
L1501	1-412-140-31	s INDUCTOR, CHIP 1.8uH (3225)
L1600	1-412-140-31	s INDUCTOR, CHIP 1.8uH (3225)
L1601	1-412-140-31	s INDUCTOR, CHIP 1.8uH (3225)
PS1	△ 1-533-272-11	s FUSE, CHIP 4A 125V
Q200	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q201	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q202	8-729-907-00	s TRANSISTOR DTC114EU
Q203	8-729-907-00	s TRANSISTOR DTC114EU
Q500	8-729-143-14	s TRANSISTOR 2SC4176-B35

(EQ-75 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q501	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q502	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q504	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q505	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q506	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q600	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q601	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q602	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q603	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q604	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q607	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q900	8-729-907-00	s TRANSISTOR DTC114EU
Q901	8-729-907-00	s TRANSISTOR DTC114EU
Q902	8-729-907-00	s TRANSISTOR DTC114EU
Q903	8-729-907-00	s TRANSISTOR DTC114EU
Q904	8-729-907-00	s TRANSISTOR DTC114EU
Q1500	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q1501	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q1502	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q1504	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q1506	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q1600	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q1601	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q1602	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q1603	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q1604	8-729-143-14	s TRANSISTOR 2SC4176-B35
Q1605	8-729-029-14	s TRANSISTOR DTC144EUA
Q1607	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q1608	8-729-029-14	s TRANSISTOR DTC144EUA
R100	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R101	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R102	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R103	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R104	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R105	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R106	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R107	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R108	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R109	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R110	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R111	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R112	1-216-864-11	s METAL, CHIP 0 (1608)
R113	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R114	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R116	1-216-864-11	s METAL, CHIP 0 (1608)
R117	1-218-696-11	s METAL, CHIP 1.5K 0.5% 1/16W (1608)
R118	1-218-696-11	s METAL, CHIP 1.5K 0.5% 1/16W (1608)
R119	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R120	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R200	1-216-864-11	s METAL, CHIP 0 (1608)
R201	1-216-864-11	s METAL, CHIP 0 (1608)
R202	1-218-716-11	s METAL, CHIP 10K 0.5% 1/16W (1608)
R203	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R204	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R205	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R206	1-218-672-11	s METAL, CHIP 150 0.5% 1/16W (1608)
R207	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R208	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R209	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)

(EQ-75 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1520	1-218-732-11	s METAL, CHIP 47K 0.5% 1/16W (1608)
R1521	1-218-709-11	s METAL, CHIP 5.1K 0.5% 1/16W (1608)
R1522	1-218-700-11	s METAL, CHIP 2.2K 0.5% 1/16W (1608)
R1524	1-218-689-11	s METAL, CHIP 750 0.5% 1/16W (1608)
R1525	1-218-694-11	s METAL, CHIP 1.2K 0.5% 1/16W (1608)
R1527	1-218-665-11	s METAL, CHIP 75 0.5% 1/16W (1608)
R1528	1-218-689-11	s METAL, CHIP 750 0.5% 1/16W (1608)
R1530	1-218-698-11	s METAL, CHIP 1.8K 0.5% 1/16W (1608)
R1532	1-218-724-11	s METAL, CHIP 22K 0.5% 1/16W (1608)
R1535	1-218-730-11	s METAL, CHIP 39K 0.5% 1/16W (1608)
R1536	1-218-722-11	s METAL, CHIP 18K 0.5% 1/16W (1608)
R1537	1-216-864-11	s METAL, CHIP 0 (1608)
R1540	1-218-716-11	s METAL, CHIP 10K 0.5% 1/16W (1608)
R1541	1-218-716-11	s METAL, CHIP 10K 0.5% 1/16W (1608)
R1542	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R1543	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R1544	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R1545	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R1546	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R1547	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R1548	1-218-668-11	s METAL, CHIP 100 0.5% 1/16W (1608)
R1549	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R1550	1-218-668-11	s METAL, CHIP 100 0.5% 1/16W (1608)
R1551	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R1552	1-218-689-11	s METAL, CHIP 750 0.5% 1/16W (1608)
R1553	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R1554	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R1555	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R1556	1-218-661-11	s METAL, CHIP 51 0.5% 1/16W (1608)
R1557	1-218-706-11	s METAL, CHIP 3.9K 0.5% 1/16W (1608)
R1558	1-218-694-11	s METAL, CHIP 1.2K 0.5% 1/16W (1608)
R1560	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R1561	1-218-724-11	s METAL, CHIP 22K 0.5% 1/16W (1608)
R1562	1-218-694-11	s METAL, CHIP 1.2K 0.5% 1/16W (1608)
R1563	1-218-716-11	s METAL, CHIP 10K 0.5% 1/16W (1608)
R1600	1-218-700-11	s METAL, CHIP 2.2K 0.5% 1/16W (1608)
R1602	1-218-716-11	s METAL, CHIP 10K 0.5% 1/16W (1608)
R1605	1-218-732-11	s METAL, CHIP 47K 0.5% 1/16W (1608)
R1608	1-218-716-11	s METAL, CHIP 10K 0.5% 1/16W (1608)
R1609	1-218-668-11	s METAL, CHIP 100 0.5% 1/16W (1608)
R1610	1-218-679-91	s METAL, CHIP 300 0.5% 1/16W (1608)
R1611	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R1612	1-218-710-11	s METAL, CHIP 5.6K 0.5% 1/16W (1608)
R1613	1-218-679-91	s METAL, CHIP 300 0.5% 1/16W (1608)
R1614	1-218-684-11	s METAL, CHIP 470 0.5% 1/16W (1608)
R1615	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R1616	1-218-735-11	s METAL, CHIP 62K 0.5% 1/16W (1608)
R1617	1-218-679-91	s METAL, CHIP 300 0.5% 1/16W (1608)
R1618	1-218-689-11	s METAL, CHIP 750 0.5% 1/16W (1608)
R1619	1-218-738-11	s METAL, CHIP 82K 0.5% 1/16W (1608)
R1620	1-218-732-11	s METAL, CHIP 47K 0.5% 1/16W (1608)
R1621	1-218-709-11	s METAL, CHIP 5.1K 0.5% 1/16W (1608)
R1622	1-218-700-11	s METAL, CHIP 2.2K 0.5% 1/16W (1608)
R1623	1-218-661-11	s METAL, CHIP 51 0.5% 1/16W (1608)
R1624	1-218-689-11	s METAL, CHIP 750 0.5% 1/16W (1608)
R1625	1-218-694-11	s METAL, CHIP 1.2K 0.5% 1/16W (1608)
R1626	1-218-661-11	s METAL, CHIP 51 0.5% 1/16W (1608)
R1627	1-218-665-11	s METAL, CHIP 75 0.5% 1/16W (1608)
R1628	1-218-689-11	s METAL, CHIP 750 0.5% 1/16W (1608)

(EQ-75 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1630	1-218-698-11	s METAL, CHIP 1.8K 0.5% 1/16W (1608)
R1631	1-218-700-11	s METAL, CHIP 2.2K 0.5% 1/16W (1608)
R1632	1-218-724-11	s METAL, CHIP 22K 0.5% 1/16W (1608)
R1633	1-218-644-11	s METAL, CHIP 10 0.5% 1/16W (1608)
R1634	1-218-644-11	s METAL, CHIP 10 0.5% 1/16W (1608)
R1635	1-218-730-11	s METAL, CHIP 39K 0.5% 1/16W (1608)
R1636	1-218-722-11	s METAL, CHIP 18K 0.5% 1/16W (1608)
R1637	1-216-864-11	s METAL, CHIP 0 (1608)
R1640	1-218-716-11	s METAL, CHIP 10K 0.5% 1/16W (1608)
R1641	1-218-716-11	s METAL, CHIP 10K 0.5% 1/16W (1608)
R1642	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R1643	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R1644	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R1645	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R1646	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R1647	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R1657	1-218-706-11	s METAL, CHIP 3.9K 0.5% 1/16W (1608)
R1658	1-218-694-11	s METAL, CHIP 1.2K 0.5% 1/16W (1608)
R1661	1-218-724-11	s METAL, CHIP 22K 0.5% 1/16W (1608)
R1662	1-218-694-11	s METAL, CHIP 1.2K 0.5% 1/16W (1608)
R1663	1-218-716-11	s METAL, CHIP 10K 0.5% 1/16W (1608)
R1671	1-218-644-11	s METAL, CHIP 10 0.5% 1/16W (1608)
R1672	1-218-644-11	s METAL, CHIP 10 0.5% 1/16W (1608)
S900	1-572-473-11	s SWITCH, PUSH
X900	1-579-358-11	s CRYSTAL 10.0 MHz

FP-117 BOARD

Ref. No. or Q'ty	Part No.	SP Description
lpc	A-8319-275-A	o MOUNTED CIRCUIT BOARD, FP-117
lpc	7-623-510-01	s LUG, 4
C1	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C2	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
C3	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C4	1-126-964-11	s ELECT 10uF 20% 50V
C5	1-126-933-11	s ELECT 100uF 20% 16V
C6	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C7	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C8	1-126-933-11	s ELECT 100uF 20% 16V
C9	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C10	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C11	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C12	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C13	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C14	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C15	1-163-017-00	s CERAMIC, CHIP 4700pF 10% 50V (2012)
C16	1-104-553-11	s FILM, CHIP 0.015uF 5% 16V (3216)
C17	1-163-017-00	s CERAMIC, CHIP 4700pF 10% 50V (2012)
C18	1-104-553-11	s FILM, CHIP 0.015uF 5% 16V (3216)
C19	1-126-964-11	s ELECT 10uF 20% 50V
C20	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C21	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C22	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C23	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C24	1-126-964-11	s ELECT 10uF 20% 50V
C25	1-126-964-11	s ELECT 10uF 20% 50V
C26	1-126-964-11	s ELECT 10uF 20% 50V
C27	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C28	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C29	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C30	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C31	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C32	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C33	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C34	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C35	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C36	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C37	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C38	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C39	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C40	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C41	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C42	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C43	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C44	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C45	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C46	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C47	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C48	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C49	1-163-137-00	s CERAMIC, CHIP 680pF 5% 50V (2012)
C50	1-163-137-00	s CERAMIC, CHIP 680pF 5% 50V (2012)
C51	1-164-161-11	s CERAMIC, CHIP 2200pF 10% 100V(2012)
CN30	1-565-845-11	o CONNECTOR, 26P, MALE
CN31	1-751-359-12	s CABLE, FLAT 34P (FRONT SW1)
CN147	1-750-878-11	s CONNECTOR, FLAT CABLE 40P, MALE
CN175	1-506-475-11	o CONNECTOR, 10P, MALE
CN224	1-568-098-11	o CONNECTOR, HINGE 30P, MALE

(FP-117 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC1	8-759-175-93	s IC CXD8814Q
IC2	8-759-708-12	s IC NJM78L12A
IC3	8-759-995-03	s IC LT1021DCS8-5
IC4	8-759-175-74	s IC M62301FP
IC5	8-759-175-74	s IC M62301FP
IC6	8-759-583-68	o IC UPD78P218AGC-FP117/V1091
IC7	8-759-908-92	s IC TL084CNS
IC8	8-759-908-92	s IC TL084CNS
IC9	8-759-908-92	s IC TL084CNS
IC10	8-759-908-92	s IC TL084CNS
IC11	8-759-926-29	s IC SN74HC175ANS
L1	1-412-533-21	s INDUCTOR 47uH
L2	1-412-533-21	s INDUCTOR 47uH
L3	1-412-533-21	s INDUCTOR 47uH
Q1	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
R1	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R2	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R3	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R4	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R5	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R6	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R7	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R8	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R9	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R10	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R11	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R12	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R13	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R14	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R15	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R16	1-218-780-11	s METAL, CHIP 270 5% 1/4W (3225)
R17	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R18	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R19	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R20	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R21	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R22	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R23	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R24	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R25	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R26	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R27	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R28	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R29	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R30	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R31	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R32	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R33	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R34	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R35	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R36	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R37	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R38	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R39	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R40	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R41	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R42	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)

(FP-117 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R43	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R44	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R45	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R46	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R47	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R48	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R49	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R50	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R51	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R52	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R53	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R54	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R55	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R56	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R57	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R58	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R59	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R60	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R61	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
RV1	1-241-759-11	s RES, ADJ, CERMET 220
RV2	1-241-759-11	s RES, ADJ, CERMET 220
RV3	1-241-759-11	s RES, ADJ, CERMET 220
RV4	1-241-759-11	s RES, ADJ, CERMET 220
RV5	1-241-759-11	s RES, ADJ, CERMET 220
RV6	1-241-759-11	s RES, ADJ, CERMET 220
RV7	1-241-759-11	s RES, ADJ, CERMET 220
X1	1-579-929-11	s RESONATOR, CERAMIC 9.83 MHz

KY-438 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8319-277-A	o MOUNTED CIRCUIT BOARD, KY-438
10pcs	3-668-124-03	s HOLDER, LED
3pcs	3-696-768-01	o SPACER
B100	1-529-025-00	s BUZZER
C100	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C101	1-126-396-11	s ELECT, CHIP 47uF 20% 16V
C102	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C103	1-126-396-11	s ELECT, CHIP 47uF 20% 16V
C104	1-126-396-11	s ELECT, CHIP 47uF 20% 16V
C105	1-126-396-11	s ELECT, CHIP 47uF 20% 16V
C106	1-126-396-11	s ELECT, CHIP 47uF 20% 16V
C107	1-163-257-11	s CERAMIC, CHIP 180pF 5% 50V (2012)
C108	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C109	1-163-257-11	s CERAMIC, CHIP 180pF 5% 50V (2012)
C110	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C111	1-163-257-11	s CERAMIC, CHIP 180pF 5% 50V (2012)
C112	1-163-257-11	s CERAMIC, CHIP 180pF 5% 50V (2012)
C113	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C114	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C115	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C200	1-126-396-11	s ELECT, CHIP 47uF 20% 16V
C201	1-128-401-11	s ELECT 100uF 20% 25V
C202	1-128-401-11	s ELECT 100uF 20% 25V
C203	1-128-401-11	s ELECT 100uF 20% 25V
C204	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C205	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C206	1-126-396-11	s ELECT, CHIP 47uF 20% 16V
C207	1-104-478-11	s TANTALUM, CHIP 10uF 20% 35V (5846)
C208	1-128-405-11	s ELECT 22uF 20% 50V
C209	1-164-182-11	s CERAMIC, CHIP 0.033uF 10% 50V(2012)
C300	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C301	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C302	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C303	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C304	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C305	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C306	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C307	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C308	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C309	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C310	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C311	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C312	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C313	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C314	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C316	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C317	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C318	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C321	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C322	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C323	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C324	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C325	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C326	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C327	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C328	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C329	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C330	1-126-399-11	s ELECT, CHIP 10uF 20% 35V

(KY-438 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C331	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C332	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C333	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C334	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C335	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C336	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C337	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C338	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C343	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
C344	1-126-399-11	s ELECT, CHIP 10uF 20% 35V
CN69	1-506-489-11	s CONNECTOR, 10P, MALE
CN145	1-778-254-11	o CONNECTOR, FLAT CABLE 20P, MALE
D100	8-719-024-81	s DIODE 1SS300
D101	8-719-024-81	s DIODE 1SS300
D102	8-719-024-81	s DIODE 1SS300
D103	8-719-024-81	s DIODE 1SS300
D104	8-719-024-81	s DIODE 1SS300
D105	8-719-024-81	s DIODE 1SS300
D106	8-719-024-81	s DIODE 1SS300
D107	8-719-024-81	s DIODE 1SS300
D108	8-719-941-23	s DIODE DA204U
D109	8-719-024-81	s DIODE 1SS300
D110	8-719-024-81	s DIODE 1SS300
D111	8-719-024-81	s DIODE 1SS300
D112	8-719-024-81	s DIODE 1SS300
D113	8-719-024-81	s DIODE 1SS300
D114	8-719-043-43	s DIODE VRPY5614S-1-TP-J22Y
D115	8-719-024-81	s DIODE 1SS300
D116	8-719-024-81	s DIODE 1SS300
D117	8-719-024-81	s DIODE 1SS300
D118	8-719-024-81	s DIODE 1SS300
D120	8-719-024-81	s DIODE 1SS300
D121	8-719-024-81	s DIODE 1SS300
D122	8-719-024-81	s DIODE 1SS300
D123	8-719-024-81	s DIODE 1SS300
D124	8-719-024-81	s DIODE 1SS300
D125	8-719-024-81	s DIODE 1SS300
D126	8-719-024-81	s DIODE 1SS300
D128	8-719-041-89	s LED TLG182P, GRN
D129	8-719-041-89	s LED TLG182P, GRN
D130	8-719-939-39	s LED GL5HD8, RED
D131	8-719-820-36	s LED TLS255A, RED
D132	8-719-939-39	s LED GL5HD8, RED
D133	8-719-041-89	s LED TLG182P, GRN
D134	8-719-041-80	s LED TLG255A, GRN
D135	8-719-939-39	s LED GL5HD8, RED
D136	8-719-041-89	s LED TLG182P, GRN
D138	8-719-024-81	s DIODE 1SS300
D190	8-719-939-39	s LED GL5HD8, RED
D193	8-719-820-36	s LED TLS255A, RED
D194	8-719-041-80	s LED TLG255A, GRN
D200	8-719-108-24	s DIODE 1SS223
D201	9-936-018-01	s DIODE HZK5C
D202	8-719-058-61	s DIODE HZM11NB3TL
D203	8-719-108-24	s DIODE 1SS223
D204	8-719-058-52	s DIODE HSK83
D205	8-719-058-50	s DIODE HZK3C
D206	8-719-058-50	s DIODE HZK3C

(KY-438 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D300	8-719-041-89	s	LED TLG182P, GRN
DP200	1-517-560-11	s	INDICATOR TUBE, FLUORESCENT
IC100	8-759-052-52	s	IC L78M05T-FA
IC101	8-759-600-34	s	IC M54532P
IC102	8-759-479-32	s	IC SN75C1168NS-E05
IC103	8-759-500-43	s	IC CXD8117P
IC104	8-759-568-71	o	IC UPD78P054GC-KY/V2.01
IC105	8-759-098-12	s	IC TD62083F
IC200	8-759-094-11	s	IC SN755723FT
L200	1-412-533-21	s	INDUCTOR 47uH
L201	1-412-533-21	s	INDUCTOR 47uH
Q100	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q101	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q102	8-729-028-81	s	TRANSISTOR DTA123JUA
Q103	8-729-028-81	s	TRANSISTOR DTA123JUA
Q104	8-729-028-81	s	TRANSISTOR DTA123JUA
Q105	8-729-028-81	s	TRANSISTOR DTA123JUA
Q106	8-729-028-81	s	TRANSISTOR DTA123JUA
Q107	8-729-028-81	s	TRANSISTOR DTA123JUA
Q108	8-729-028-81	s	TRANSISTOR DTA123JUA
Q109	8-729-028-81	s	TRANSISTOR DTA123JUA
Q110	8-729-029-04	s	TRANSISTOR DTC123JUA
Q111	8-729-029-04	s	TRANSISTOR DTC123JUA
Q112	8-729-029-04	s	TRANSISTOR DTC123JUA
Q113	8-729-029-04	s	TRANSISTOR DTC123JUA
Q114	8-729-029-04	s	TRANSISTOR DTC123JUA
Q115	8-729-029-04	s	TRANSISTOR DTC123JUA
Q116	8-729-029-04	s	TRANSISTOR DTC123JUA
Q117	8-729-029-04	s	TRANSISTOR DTC123JUA
Q118	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q119	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q120	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q121	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q122	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q123	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q124	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q125	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q200	8-729-907-00	s	TRANSISTOR DTC114EU
Q201	8-729-904-57	s	TRANSISTOR DTB114EK
Q202	8-729-907-00	s	TRANSISTOR DTC114EU
Q203	8-729-904-57	s	TRANSISTOR DTB114EK
Q204	8-729-907-00	s	TRANSISTOR DTC114EU
Q205	8-729-904-57	s	TRANSISTOR DTB114EK
Q206	8-729-907-00	s	TRANSISTOR DTC114EU
Q207	8-729-904-57	s	TRANSISTOR DTB114EK
Q208	8-729-907-00	s	TRANSISTOR DTC114EU
Q209	8-729-904-57	s	TRANSISTOR DTB114EK
Q210	8-729-907-00	s	TRANSISTOR DTC114EU
Q211	8-729-904-57	s	TRANSISTOR DTB114EK
Q212	8-729-907-00	s	TRANSISTOR DTC114EU
Q213	8-729-904-57	s	TRANSISTOR DTB114EK
Q214	8-729-907-00	s	TRANSISTOR DTC114EU
Q215	8-729-904-57	s	TRANSISTOR DTB114EK
Q216	8-729-907-00	s	TRANSISTOR DTC114EU
Q217	8-729-904-57	s	TRANSISTOR DTB114EK
Q218	8-729-230-49	s	TRANSISTOR 2SC2712-YG

(KY-438 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q219	8-729-022-34	s	TRANSISTOR 2SD1804T
Q300	8-729-028-74	s	TRANSISTOR DTA114TUA
Q301	8-729-028-74	s	TRANSISTOR DTA114TUA
Q302	8-729-028-74	s	TRANSISTOR DTA114TUA
Q303	8-729-028-74	s	TRANSISTOR DTA114TUA
Q304	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q305	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q306	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q307	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q308	8-729-028-74	s	TRANSISTOR DTA114TUA
Q309	8-729-028-74	s	TRANSISTOR DTA114TUA
Q310	8-729-028-74	s	TRANSISTOR DTA114TUA
Q311	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q312	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q313	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q314	8-729-028-74	s	TRANSISTOR DTA114TUA
Q315	8-729-028-74	s	TRANSISTOR DTA114TUA
Q316	8-729-028-74	s	TRANSISTOR DTA114TUA
Q317	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q318	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q319	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q320	8-729-028-74	s	TRANSISTOR DTA114TUA
Q321	8-729-028-74	s	TRANSISTOR DTA114TUA
Q322	8-729-028-74	s	TRANSISTOR DTA114TUA
Q323	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q324	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q325	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q326	8-729-028-74	s	TRANSISTOR DTA114TUA
Q327	8-729-028-74	s	TRANSISTOR DTA114TUA
Q329	8-729-028-74	s	TRANSISTOR DTA114TUA
Q330	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q331	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q333	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q334	8-729-028-74	s	TRANSISTOR DTA114TUA
Q335	8-729-028-74	s	TRANSISTOR DTA114TUA
Q337	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q338	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q341	8-729-028-74	s	TRANSISTOR DTA114TUA
Q342	8-729-028-74	s	TRANSISTOR DTA114TUA
Q343	8-729-028-74	s	TRANSISTOR DTA114TUA
Q345	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q346	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q347	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q348	8-729-028-74	s	TRANSISTOR DTA114TUA
Q349	8-729-028-74	s	TRANSISTOR DTA114TUA
Q350	8-729-028-74	s	TRANSISTOR DTA114TUA
Q351	8-729-028-74	s	TRANSISTOR DTA114TUA
Q352	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q353	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q354	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q355	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q356	8-729-028-74	s	TRANSISTOR DTA114TUA
Q357	8-729-028-74	s	TRANSISTOR DTA114TUA
Q358	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q359	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q360	8-729-028-74	s	TRANSISTOR DTA114TUA
Q361	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q362	8-729-028-74	s	TRANSISTOR DTA114TUA
Q363	8-729-117-32	s	TRANSISTOR 2SC4177-L6

(KY-438 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q364	8-729-028-74	s TRANSISTOR DTA114TUA
Q365	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q366	8-729-028-74	s TRANSISTOR DTA114TUA
Q367	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q368	8-729-028-74	s TRANSISTOR DTA114TUA
Q369	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q370	8-729-028-74	s TRANSISTOR DTA114TUA
Q371	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q372	8-729-028-74	s TRANSISTOR DTA114TUA
Q373	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q374	8-729-028-74	s TRANSISTOR DTA114TUA
Q375	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q376	8-729-028-74	s TRANSISTOR DTA114TUA
Q377	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q386	8-729-028-74	s TRANSISTOR DTA114TUA
Q387	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q388	8-729-028-74	s TRANSISTOR DTA114TUA
Q389	8-729-117-32	s TRANSISTOR 2SC4177-L6
R100	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R101	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R102	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R103	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R104	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R105	1-216-085-00	s METAL, CHIP 33K 5% 1/10W (2012)
R106	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R107	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R108	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R109	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R110	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R111	1-216-077-00	s METAL, CHIP 15K 5% 1/10W (2012)
R112	1-216-077-00	s METAL, CHIP 15K 5% 1/10W (2012)
R113	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R114	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R115	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R116	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R117	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R118	1-216-067-00	s METAL, CHIP 5.6K 5% 1/10W (2012)
R119	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R120	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R121	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R122	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R123	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R124	1-218-325-11	s METAL, CHIP 120 5% 1/4W (3225)
R125	1-216-295-00	s METAL, CHIP 0 (2012)
R126	1-218-325-11	s METAL, CHIP 120 5% 1/4W (3225)
R127	1-218-325-11	s METAL, CHIP 120 5% 1/4W (3225)
R129	1-218-325-11	s METAL, CHIP 120 5% 1/4W (3225)
R130	1-218-325-11	s METAL, CHIP 120 5% 1/4W (3225)
R131	1-218-325-11	s METAL, CHIP 120 5% 1/4W (3225)
R132	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R133	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R134	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R135	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R136	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R137	1-218-325-11	s METAL, CHIP 120 5% 1/4W (3225)
R138	1-218-325-11	s METAL, CHIP 120 5% 1/4W (3225)
R139	1-218-325-11	s METAL, CHIP 120 5% 1/4W (3225)
R140	1-218-325-11	s METAL, CHIP 120 5% 1/4W (3225)

(KY-438 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R141	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R157	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R158	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R160	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R162	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R163	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R164	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R168	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R169	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R172	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R173	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R177	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R178	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R182	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R183	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R187	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R188	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R191	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R192	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R193	1-216-295-00	s METAL, CHIP 0 (2012)
R195	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R196	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R198	1-216-295-00	s METAL, CHIP 0 (2012)
R200	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R201	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R202	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R203	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R204	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R205	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R206	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R207	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R208	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R209	1-216-051-00	s METAL, CHIP 1.2K 5% 1/10W (2012)
R210	1-216-051-00	s METAL, CHIP 1.2K 5% 1/10W (2012)
R211	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R212	1-216-021-00	s METAL, CHIP 68 5% 1/10W (2012)
R213	1-216-037-00	s METAL, CHIP 330 5% 1/10W (2012)
R214	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R215	1-216-075-00	s METAL, CHIP 12K 5% 1/10W (2012)
R216	1-216-075-00	s METAL, CHIP 12K 5% 1/10W (2012)
R300	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R301	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R302	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R303	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R304	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R305	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R306	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R307	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R308	1-218-780-11	s METAL, CHIP 270 5% 1/4W (3225)
R309	1-218-780-11	s METAL, CHIP 270 5% 1/4W (3225)
R310	1-218-478-11	s METAL, CHIP 330 5% 1/4W (3225)
R311	1-220-260-11	s METAL, CHIP 390 5% 1/4W (3225)
R312	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R313	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R314	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R315	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R316	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R317	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R318	1-218-780-11	s METAL, CHIP 270 5% 1/4W (3225)

(KY-438 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R387	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R388	1-220-260-11	s	METAL, CHIP 390 5% 1/4W (3225)
R389	1-220-260-11	s	METAL, CHIP 390 5% 1/4W (3225)
R390	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R391	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R392	1-220-260-11	s	METAL, CHIP 390 5% 1/4W (3225)
R393	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R394	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R395	1-220-260-11	s	METAL, CHIP 390 5% 1/4W (3225)
R396	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R397	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R398	1-220-260-11	s	METAL, CHIP 390 5% 1/4W (3225)
R402	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R403	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R404	1-220-261-11	s	METAL, CHIP 470 5% 1/4W (3225)
R405	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R406	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R407	1-220-260-11	s	METAL, CHIP 390 5% 1/4W (3225)
R408	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R409	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R410	1-218-780-11	s	METAL, CHIP 270 5% 1/4W (3225)
R411	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R412	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R413	1-218-478-11	s	METAL, CHIP 330 5% 1/4W (3225)
R414	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R415	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R416	1-218-478-11	s	METAL, CHIP 330 5% 1/4W (3225)
R417	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R418	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R419	1-220-260-11	s	METAL, CHIP 390 5% 1/4W (3225)
R432	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R433	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R434	1-220-261-11	s	METAL, CHIP 470 5% 1/4W (3225)
R435	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R436	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R437	1-220-261-11	s	METAL, CHIP 470 5% 1/4W (3225)
RB101	1-239-306-11	s	RES, NETWORK, CHIP 10Kx8 (6432)
RB102	1-239-305-11	s	RES, NETWORK, CHIP 4.7Kx8 (6432)
S100	1-692-892-11	s	SWITCH, PUSH (WITH LED)
S101	1-692-891-21	s	SWITCH, PUSH (WITH LED)
S102	1-692-890-11	s	SWITCH, PUSH (WITH LED)
S103	1-692-994-11	s	SWITCH, PUSH (WITH LED)
S104	1-692-994-11	s	SWITCH, PUSH (WITH LED)
S105	1-771-504-11	s	SWITCH, PUSH (WITH LED)
S106	1-692-016-11	s	SWITCH, PUSH
S107	1-692-892-21	s	SWITCH, PUSH (WITH LED)
S108	1-692-890-11	s	SWITCH, PUSH (WITH LED)
S109	1-692-994-11	s	SWITCH, PUSH (WITH LED)
S110	1-692-994-11	s	SWITCH, PUSH (WITH LED)
S111	1-771-504-11	s	SWITCH, PUSH (WITH LED)
S112	1-692-016-11	s	SWITCH, PUSH
S113	1-692-890-41	s	SWITCH, PUSH (WITH LED)
S114	1-692-891-11	s	SWITCH, PUSH (WITH LED)
S115	1-692-994-11	s	SWITCH, PUSH (WITH LED)
S116	1-692-994-11	s	SWITCH, PUSH (WITH LED)
S117	1-692-016-11	s	SWITCH, PUSH
S118	1-692-890-31	s	SWITCH, PUSH (WITH LED)
S119	1-692-994-11	s	SWITCH, PUSH (WITH LED)

(KY-438 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
S120	1-692-994-11	s SWITCH, PUSH (WITH LED)
S121	1-692-994-11	s SWITCH, PUSH (WITH LED)
S122	1-692-537-21	s SWITCH, PUSH (WITH LED)
S123	1-692-890-21	s SWITCH, PUSH (WITH LED)
S124	1-692-994-11	s SWITCH, PUSH (WITH LED)
S126	1-692-994-11	s SWITCH, PUSH (WITH LED)
S127	1-552-539-00	s SWITCH, PUSH
S128	1-692-890-11	s SWITCH, PUSH (WITH LED)
S129	1-692-016-11	s SWITCH, PUSH
S131	1-692-994-11	s SWITCH, PUSH (WITH LED)
S132	1-692-994-11	s SWITCH, PUSH (WITH LED)
S133	1-552-539-00	s SWITCH, PUSH
S135	1-692-537-21	s SWITCH, PUSH (WITH LED)
S137	1-692-537-21	s SWITCH, PUSH (WITH LED)
S138	1-692-994-11	s SWITCH, PUSH (WITH LED)
S139	1-692-994-11	s SWITCH, PUSH (WITH LED)
S140	1-692-994-11	s SWITCH, PUSH (WITH LED)
S141	1-692-537-21	s SWITCH, PUSH (WITH LED)
S142	1-692-890-11	s SWITCH, PUSH (WITH LED)
S143	1-692-537-21	s SWITCH, PUSH (WITH LED)
S144	1-692-994-11	s SWITCH, PUSH (WITH LED)
S145	1-692-994-11	s SWITCH, PUSH (WITH LED)
S146	1-552-539-00	s SWITCH, PUSH
S147	1-692-016-11	s SWITCH, PUSH
S150	1-692-890-11	s SWITCH, PUSH (WITH LED)
T200	1-429-585-11	s TRANSFORMER, CONVERTER
X100	1-579-530-11	s RESONATOR, CERAMIC 4.915 MHz

LP-81 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8276-627-A	o MOUNTED CIRCUIT BOARD, LP-81
1pc	3-171-508-04	o HOLDER, LAMP
CN932	1-564-001-11	o CONNECTOR, 2P, MALE
D1	8-719-820-27	s LED TLY256, YEL
D2	8-719-820-27	s LED TLY256, YEL
D3	8-719-820-27	s LED TLY256, YEL
D4	8-719-820-27	s LED TLY256, YEL
D5	8-719-820-27	s LED TLY256, YEL
D6	8-719-820-27	s LED TLY256, YEL
D7	8-719-820-27	s LED TLY256, YEL
D8	8-719-820-27	s LED TLY256, YEL
D9	8-719-820-27	s LED TLY256, YEL
D10	8-719-820-27	s LED TLY256, YEL
R1	1-249-409-11	s CARBON 220 5% 1/4W
R2	1-249-409-11	s CARBON 220 5% 1/4W
R3	1-249-409-11	s CARBON 220 5% 1/4W
R4	1-249-409-11	s CARBON 220 5% 1/4W
R5	1-249-409-11	s CARBON 220 5% 1/4W



MB-818 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8323-294-A	o MB ASSY (MB-818E MCB)
37pcs	7-685-865-09	s SCREW +BVT 2.6x12 (S)
6pcs	7-682-648-09	s SCREW +PS 3x8
C20	1-128-076-11	s ELECT 10uF 20% 25V
C21	1-128-076-11	s ELECT 10uF 20% 25V
CN90	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN91	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN92	1-778-259-11	o CONNECTOR, 148P, FEMALE
CN97	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN98	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN99	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN100	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN108	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN109	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN110	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN111	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN112	1-778-259-11	o CONNECTOR, 148P, FEMALE
CN113	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN114	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN115	1-778-259-11	o CONNECTOR, 148P, FEMALE
CN116	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN117	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN118	1-778-259-11	o CONNECTOR, 148P, FEMALE
CN122	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN123	1-778-258-11	o CONNECTOR, 124P, FEMALE
CN124	1-778-259-11	o CONNECTOR, 148P, FEMALE
CN130	1-764-102-11	s CONNECTOR, D-SUB 15P, MALE
CN131	1-565-388-11	o CONNECTOR, D-SUB 9P, MALE
CN132	1-563-770-11	s CONNECTOR, D-SUB 9P, FEMALE
CN133	1-563-770-11	s CONNECTOR, D-SUB 9P, FEMALE
CN134	1-785-299-11	o CONNECTOR, D-SUB 29P, MALE
CN140	1-580-541-11	s CONNECTOR, LY 24P, MALE
CN143	1-506-489-11	s CONNECTOR, 10P, MALE
CN144	1-770-442-11	o CONNECTOR, TX 50P, MALE
CN145	1-764-449-11	s CONNECTOR, TX 20P, MALE
CN146	1-506-479-11	s CONNECTOR, 14P, MALE
CN147	1-751-352-11	s CABLE, FLAT 40P (FP CONT)
CN150	1-506-473-11	s CONNECTOR, 8P, MALE
CN151	1-506-472-11	s CONNECTOR, 7P, MALE
CN152	1-580-837-11	o CONNECTOR, PC BOARD 3P, MALE
CN153	1-779-092-11	s CONNECTOR, PC BOARD 10P, MALE
CN154	1-564-005-11	o CONNECTOR, 6P, MALE
CN160	1-564-002-11	s CONNECTOR, 3P, MALE
CN161	1-564-002-11	s CONNECTOR, 3P, MALE
CN162	1-506-468-11	s CONNECTOR, 3P, MALE
CN170	1-506-478-11	s CONNECTOR, 13P, MALE
CN171	1-506-479-11	s CONNECTOR, 14P, MALE
CN172	1-506-469-11	s CONNECTOR, 4P, MALE
CN193	1-564-004-11	o CONNECTOR, 5P, MALE
CN195	1-564-005-11	o CONNECTOR, 6P, MALE
CN196	1-506-469-11	s CONNECTOR, 4P, MALE
CN197	1-506-474-11	s CONNECTOR, 9P, MALE
FL100	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL101	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL102	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL103	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL104	1-239-896-12	s FILTER, EMI, CHIP (2012)

(MB-818 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
FL105	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL106	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL107	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL108	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL109	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL110	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL111	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL112	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL113	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL114	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL115	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL116	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL117	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL118	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL119	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL120	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL121	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL122	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL123	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL124	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL125	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL126	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL127	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL128	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL130	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL131	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL132	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL133	1-239-896-12	s FILTER, EMI, CHIP (2012)
FL134	1-239-896-12	s FILTER, EMI, CHIP (2012)
IC20	8-759-700-65	s IC NJM79L05A
L101	1-406-864-21	s COIL, CHOKE 4.7uH
L102	1-406-864-21	s COIL, CHOKE 4.7uH
L103	1-406-864-21	s COIL, CHOKE 4.7uH
L104	1-406-864-21	s COIL, CHOKE 4.7uH
Q1	8-729-029-14	s TRANSISTOR DTC144EUA
Q2	8-729-143-63	s TRANSISTOR 2SJ132
R1	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R2	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)

MS-58 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8323-238-A	o MOUNTED CIRCUIT BOARD, MS-58E
3pcs	3-180-854-03	o COVER, MR SENSOR
C1	1-117-315-11	s ELECT 220uF 20% 25V
C2	1-128-526-11	s ELECT 100uF 20% 16V
C3	1-128-526-11	s ELECT 100uF 20% 16V
C4	1-117-315-11	s ELECT 220uF 20% 25V
C5	1-128-526-11	s ELECT 100uF 20% 16V
C6	1-125-565-11	s DOUBLE LAYERS 0.22FARAD 5.5V
C7	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C9	1-107-906-11	s ELECT 10uF 20% 50V
C12	1-107-906-11	s ELECT 10uF 20% 50V
C13	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C14	1-164-346-11	s CERAMIC, CHIP 1.0uF 16V (2012)
C15	1-128-526-11	s ELECT 100uF 20% 16V
C16	1-128-526-11	s ELECT 100uF 20% 16V
C17	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C19	1-107-854-11	s TANTALUM, CHIP 68uF 20% 6.3V (5833)
C101	1-136-684-51	s FILM 0.0022uF 2% 100V
C102	1-136-684-51	s FILM 0.0022uF 2% 100V
C104	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C105	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C106	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C107	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C108	1-107-906-11	s ELECT 10uF 20% 50V
C109	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V (2012)
C110	1-163-263-11	s CERAMIC, CHIP 330pF 5% 50V (2012)
C111	1-135-145-11	s TANTALUM, CHIP 0.47uF 10% 35V(3216)
C112	1-107-854-11	s TANTALUM, CHIP 68uF 20% 6.3V (5833)
C113	1-107-888-11	s ELECT 47uF 20% 25V
C114	1-107-888-11	s ELECT 47uF 20% 25V
C115	1-135-145-11	s TANTALUM, CHIP 0.47uF 10% 35V(3216)
C116	1-107-854-11	s TANTALUM, CHIP 68uF 20% 6.3V (5833)
C117	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C118	1-163-023-00	s CERAMIC, CHIP 0.015uF 10% 50V(2012)
C119	1-107-888-11	s ELECT 47uF 20% 25V
C120	1-128-526-11	s ELECT 100uF 20% 16V
C121	1-117-315-11	s ELECT 220uF 20% 25V
C122	1-128-526-11	s ELECT 100uF 20% 16V
C123	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C124	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C125	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C126	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C127	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C128	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C129	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C131	1-107-906-11	s ELECT 10uF 20% 50V
C132	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C150	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C151	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C152	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C201	1-128-526-11	s ELECT 100uF 20% 16V
C202	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C203	1-107-888-11	s ELECT 47uF 20% 25V
C204	1-107-888-11	s ELECT 47uF 20% 25V
C205	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C206	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C207	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C208	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)

(MS-58 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C209	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C210	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C211	1-130-491-00	s MYLAR 0.047uF 5% 50V
C212	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C213	1-130-477-00	s MYLAR 0.0033uF 5% 50V
C214	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C215	1-107-906-11	s ELECT 10uF 20% 50V
C216	1-163-009-11	s CERAMIC, CHIP 1000pF 10% 50V (2012)
C217	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C218	1-163-009-11	s CERAMIC, CHIP 1000pF 10% 50V (2012)
C219	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C220	1-130-491-00	s MYLAR 0.047uF 5% 50V
C221	1-130-477-00	s MYLAR 0.0033uF 5% 50V
C222	1-107-906-11	s ELECT 10uF 20% 50V
C223	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C224	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C300	1-164-346-11	s CERAMIC, CHIP 1.0uF 16V (2012)
C301	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C302	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C303	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C304	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C305	1-164-346-11	s CERAMIC, CHIP 1.0uF 16V (2012)
C306	1-164-346-11	s CERAMIC, CHIP 1.0uF 16V (2012)
C307	1-163-009-11	s CERAMIC, CHIP 1000pF 10% 50V (2012)
C308	1-163-009-11	s CERAMIC, CHIP 1000pF 10% 50V (2012)
C309	1-163-009-11	s CERAMIC, CHIP 1000pF 10% 50V (2012)
C310	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C311	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C312	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C313	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C314	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C316	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C317	1-164-346-11	s CERAMIC, CHIP 1.0uF 16V (2012)
C318	1-104-760-11	s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C319	1-163-009-11	s CERAMIC, CHIP 1000pF 10% 50V (2012)
C320	1-163-009-11	s CERAMIC, CHIP 1000pF 10% 50V (2012)
C321	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C322	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C323	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C324	1-115-339-11	s CERAMIC, CHIP 0.1uF 10% 50V (2012)
C325	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C326	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
CN1	1-564-005-11	o CONNECTOR, 6P, MALE
CN2	1-770-442-11	o CONNECTOR, TX 50P, MALE
CN3	1-569-940-11	o CONNECTOR, FPC/FFC 24P
CN4	1-569-940-11	o CONNECTOR, FPC/FFC 24P
CN11	1-506-473-11	s CONNECTOR, 8P, MALE
CN13	1-564-001-11	o CONNECTOR, 2P, MALE
CN14	1-564-011-11	o CONNECTOR, 12P, MALE
CN15	1-506-472-11	s CONNECTOR, 7P, MALE
CN16	1-566-764-11	o CONNECTOR, 2R 9P, MALE
CN17	1-564-002-11	s CONNECTOR, 3P, MALE
CN18	1-506-473-11	s CONNECTOR, 8P, MALE
CN20	1-506-468-11	s CONNECTOR, 3P, MALE
CN21	1-506-469-11	s CONNECTOR, 4P, MALE
CN22	1-562-708-11	o CONNECTOR, FPC/FFC 13P
CN23	1-562-708-11	o CONNECTOR, FPC/FFC 13P
CN25	1-506-473-11	s CONNECTOR, 8P, MALE

(MS-58 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN26	1-564-005-11	o	CONNECTOR, 6P, MALE
CN27	1-564-002-11	s	CONNECTOR, 3P, MALE
CN28	1-564-001-11	o	CONNECTOR, 2P, MALE
D1	8-719-974-51	s	DIODE SB20-03P
D2	8-719-104-34	s	DIODE 1S2835
D3	8-719-938-07	s	LED GL480, INFRARED
D4	8-719-938-07	s	LED GL480, INFRARED
D5	8-719-938-07	s	LED GL480, INFRARED
D101	8-719-104-34	s	DIODE 1S2835
D102	8-719-104-34	s	DIODE 1S2835
D103	8-719-104-34	s	DIODE 1S2835
D104	8-719-025-48	s	DIODE 02CZ13
D201	8-719-104-34	s	DIODE 1S2835
D202	8-719-104-34	s	DIODE 1S2835
D203	8-719-104-34	s	DIODE 1S2835
D204	8-719-104-34	s	DIODE 1S2835
E1	1-535-881-21	o	TERMINAL, TP
E901	1-535-881-21	o	TERMINAL, TP
IC1	8-759-463-91	s	IC UPD75106GF-J20-3BE
IC2	8-759-234-08	s	IC TA78L05F
IC3	8-759-701-84	s	IC NJM7905FA
IC4	8-759-700-07	s	IC NJM2903M
IC5	8-759-600-34	s	IC M54532P
IC6	8-759-645-23	s	IC M54523P
IC7	8-759-925-76	s	IC SN74HC08ANS
IC8	8-759-198-65	s	IC S-80733SL-AX
IC9	8-759-464-95	s	IC AK6420AF
IC101	8-759-805-32	s	IC LA7205M
IC102	8-759-805-32	s	IC LA7205M
IC103	8-759-009-07	s	IC MC14053BF
IC104	8-759-106-02	s	IC UPC4570G2
IC105	8-743-914-00	s	HIC BX-3914
IC106	8-759-106-02	s	IC UPC4570G2
IC107	8-759-927-46	s	IC SN74HC00ANS
IC108	8-759-009-07	s	IC MC14053BF
IC109	8-759-009-07	s	IC MC14053BF
IC201	8-759-983-69	s	IC LM358PS
IC202	8-759-983-74	s	IC LM324NS
IC203	8-759-700-07	s	IC NJM2903M
IC204	8-759-700-07	s	IC NJM2903M
IC205	8-759-635-27	s	IC M62352GP
IC301	8-759-983-69	s	IC LM358PS
IC302	8-759-983-69	s	IC LM358PS
IC303	8-759-700-07	s	IC NJM2903M
IC304	8-759-106-02	s	IC UPC4570G2
IC305	8-759-700-07	s	IC NJM2903M
IC307	8-759-700-07	s	IC NJM2903M
IC308	8-759-009-07	s	IC MC14053BF
IC309	8-759-983-69	s	IC LM358PS
L1	1-412-533-21	s	INDUCTOR 47uH
L2	1-412-533-21	s	INDUCTOR 47uH
L3	1-412-533-21	s	INDUCTOR 47uH
L4	1-412-533-21	s	INDUCTOR 47uH
L5	1-412-533-21	s	INDUCTOR 47uH
L6	1-412-533-21	s	INDUCTOR 47uH
L101	1-412-533-21	s	INDUCTOR 47uH
L102	1-410-393-11	s	INDUCTOR, CHIP 100uH (3225)

(MS-58 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L103	1-410-393-11	s	INDUCTOR, CHIP 100uH (3225)
Q1	8-729-903-81	s	PHOTO-TRANSISTOR PT480
Q2	8-729-903-81	s	PHOTO-TRANSISTOR PT480
Q3	8-729-903-81	s	PHOTO-TRANSISTOR PT480
Q101	8-729-117-32	s	TRANSISTOR 2SC4177-L6
Q102	8-729-029-14	s	TRANSISTOR DTC144EUA
Q103	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q104	8-729-029-14	s	TRANSISTOR DTC144EUA
Q105	8-729-029-14	s	TRANSISTOR DTC144EUA
Q106	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q107	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q109	8-729-143-63	s	TRANSISTOR 2SJ132
Q110	8-729-029-14	s	TRANSISTOR DTC144EUA
Q111	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q201	8-729-209-07	s	TRANSISTOR 2SC4213-B
R1	1-212-873-11	s	RES, FUSIBLE 47 5% 1/4W
R2	1-216-691-11	s	METAL, CHIP 47K 0.5% 1/10W (2012)
R3	1-216-691-11	s	METAL, CHIP 47K 0.5% 1/10W (2012)
R6	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R7	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R8	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R9	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R10	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R11	1-216-691-11	s	METAL, CHIP 47K 0.5% 1/10W (2012)
R12	1-216-089-00	s	METAL, CHIP 47K 5% 1/10W (2012)
R13	1-216-057-00	s	METAL, CHIP 2.2K 5% 1/10W (2012)
R14	1-216-121-00	s	METAL, CHIP 1.0M 5% 1/10W (2012)
R15	1-216-121-00	s	METAL, CHIP 1.0M 5% 1/10W (2012)
R16	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R17	1-216-067-00	s	METAL, CHIP 5.6K 5% 1/10W (2012)
R18	1-216-041-00	s	METAL, CHIP 470 5% 1/10W (2012)
R19	1-216-077-00	s	METAL, CHIP 15K 5% 1/10W (2012)
R20	1-216-063-00	s	METAL, CHIP 3.9K 5% 1/10W (2012)
R21	1-216-077-00	s	METAL, CHIP 15K 5% 1/10W (2012)
R22	1-216-053-00	s	METAL, CHIP 1.5K 5% 1/10W (2012)
R23	1-216-053-00	s	METAL, CHIP 1.5K 5% 1/10W (2012)
R24	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R25	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R26	1-216-033-00	s	METAL, CHIP 220 5% 1/10W (2012)
R27	1-216-033-00	s	METAL, CHIP 220 5% 1/10W (2012)
R28	1-216-635-11	s	METAL, CHIP 220 0.5% 1/10W (2012)
R29	1-216-395-00	s	METAL 3.3 5% 3W
R30	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R31	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R33	1-216-627-11	s	METAL, CHIP 100 0.5% 1/10W (2012)
R100	1-216-683-11	s	METAL, CHIP 22K 0.5% 1/10W (2012)
R101	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R102	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R103	1-216-089-00	s	METAL, CHIP 47K 5% 1/10W (2012)
R104	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R105	1-216-097-00	s	METAL, CHIP 100K 5% 1/10W (2012)
R106	1-216-089-00	s	METAL, CHIP 47K 5% 1/10W (2012)
R107	1-216-065-00	s	METAL, CHIP 4.7K 5% 1/10W (2012)
R108	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R109	1-216-073-00	s	METAL, CHIP 10K 5% 1/10W (2012)
R110	1-216-691-11	s	METAL, CHIP 47K 0.5% 1/10W (2012)
R111	1-216-691-11	s	METAL, CHIP 47K 0.5% 1/10W (2012)
R112	1-216-646-11	s	METAL, CHIP 620 0.5% 1/10W (2012)

(MS-58 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R113	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R114	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R115	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R116	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R117	1-216-055-00	s METAL, CHIP 1.8K 5% 1/10W (2012)
R118	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R119	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R120	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R121	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R122	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R123	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R124	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R125	1-216-075-00	s METAL, CHIP 12K 5% 1/10W (2012)
R127	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R128	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R129	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R130	1-216-695-11	s METAL, CHIP 68K 0.5% 1/10W (2012)
R131	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R133	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R134	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R135	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R136	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R137	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R138	1-216-691-11	s METAL, CHIP 47K 0.5% 1/10W (2012)
R139	1-216-691-11	s METAL, CHIP 47K 0.5% 1/10W (2012)
R140	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R201	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R202	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R203	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R204	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R205	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R206	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R207	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R208	1-216-695-11	s METAL, CHIP 68K 0.5% 1/10W (2012)
R209	1-216-695-11	s METAL, CHIP 68K 0.5% 1/10W (2012)
R210	1-216-695-11	s METAL, CHIP 68K 0.5% 1/10W (2012)
R211	1-216-695-11	s METAL, CHIP 68K 0.5% 1/10W (2012)
R212	1-216-067-00	s METAL, CHIP 5.6K 5% 1/10W (2012)
R213	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R214	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R215	1-216-085-00	s METAL, CHIP 33K 5% 1/10W (2012)
R216	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R217	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R218	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R219	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R220	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R221	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R222	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R223	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R224	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R225	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R226	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R227	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R228	1-216-695-11	s METAL, CHIP 68K 0.5% 1/10W (2012)
R229	1-216-695-11	s METAL, CHIP 68K 0.5% 1/10W (2012)
R230	1-216-695-11	s METAL, CHIP 68K 0.5% 1/10W (2012)
R231	1-216-695-11	s METAL, CHIP 68K 0.5% 1/10W (2012)
R232	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R233	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)

(MS-58 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R234	1-216-067-00	s METAL, CHIP 5.6K 5% 1/10W (2012)
R235	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R236	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R237	1-216-085-00	s METAL, CHIP 33K 5% 1/10W (2012)
R238	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R239	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R240	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R241	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R242	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R243	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R244	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R245	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R246	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R247	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R248	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R249	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R250	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R251	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R301	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R302	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R303	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R304	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R305	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R306	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R307	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R308	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R309	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R310	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R311	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R312	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R313	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R314	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R315	1-216-063-00	s METAL, CHIP 3.9K 5% 1/10W (2012)
R316	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R317	1-216-063-00	s METAL, CHIP 3.9K 5% 1/10W (2012)
R318	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R319	1-216-109-00	s METAL, CHIP 330K 5% 1/10W (2012)
R320	1-216-109-00	s METAL, CHIP 330K 5% 1/10W (2012)
R321	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R322	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R323	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R324	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R325	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R326	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R327	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R328	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R329	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R330	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R331	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R332	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R333	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R334	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R335	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R336	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R337	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R338	1-216-063-00	s METAL, CHIP 3.9K 5% 1/10W (2012)
R339	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R340	1-216-063-00	s METAL, CHIP 3.9K 5% 1/10W (2012)
R341	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)

(MS-58 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R342	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R343	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R344	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R345	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R346	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R347	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R348	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R349	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R350	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R351	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R352	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R357	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R358	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R359	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R360	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
RB1	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB2	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB3	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB4	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB5	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB6	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB7	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB8	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB9	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB10	1-239-308-11	s RES, NETWORK, CHIP 47Kx8 (6432)
RB11	1-239-308-11	s RES, NETWORK, CHIP 47Kx8 (6432)
RB12	1-239-308-11	s RES, NETWORK, CHIP 47Kx8 (6432)
X1	1-579-928-11	s RESONATOR, CERAMIC 2.27 MHz

PC-70 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8276-625-A	o MOUNTED CIRCUIT BOARD, PC-70
1pc	3-176-598-02	o SPRING, GROUND
CN934	1-565-038-11	s CONNECTOR, FPC/FFC 5P
PH1	8-719-939-05	s PHOTO-INTERRUPTER GP-1S54
PH2	8-719-939-05	s PHOTO-INTERRUPTER GP-1S54
PH3	8-719-939-05	s PHOTO-INTERRUPTER GP-1S54
R1	1-247-825-31	s CARBON 560 5% 1/4W
R2	1-247-825-31	s CARBON 560 5% 1/4W
R3	1-247-825-31	s CARBON 560 5% 1/4W

PD-35 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-622-596-11	o PRINTED WIRING BOARD, PD-35
1pc	1-454-338-00	s SOLENOID "PINCH"
CN851	1-564-001-11	o CONNECTOR, 2P, MALE
CN852	1-508-900-00	s CONNECTOR, IL 2P, MALE
CN854	1-564-005-11	o CONNECTOR, 6P, MALE

PTC-54 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-640-163-12	o PRINTED WIRING BOARD, PTC-54
CN904	1-564-013-11	o CONNECTOR, 3P, MALE
PH1	8-719-939-05	s PHOTO-INTERRUPTER GP-1S54

PTC-59 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8267-549-B	o SENSOR ASSY, MC (PTC-59 MCB)
CN1	1-565-881-11	o CONNECTOR, PC BOARD 9P, MALE
D1	8-719-938-07	s LED GL480, INFRARED
D2	8-719-938-07	s LED GL480, INFRARED
D3	8-719-938-07	s LED GL480, INFRARED
D4	8-719-938-07	s LED GL480, INFRARED
D5	8-719-938-07	s LED GL480, INFRARED
D6	8-719-938-07	s LED GL480, INFRARED
Q1	8-729-903-81	s PHOTO-TRANSISTOR PT480
Q2	8-729-903-81	s PHOTO-TRANSISTOR PT480
Q3	8-729-903-81	s PHOTO-TRANSISTOR PT480
Q4	8-729-903-81	s PHOTO-TRANSISTOR PT480
Q5	8-729-903-81	s PHOTO-TRANSISTOR PT480
Q6	8-729-903-81	s PHOTO-TRANSISTOR PT480

PTC-69 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8276-585-B	o MOUNTED CIRCUIT BOARD, PTC-69
1pc	3-180-859-02	o HOLDER, SENSOR
C1	1-162-875-11	s CERAMIC 68pF 5% 50V
C2	1-162-875-11	s CERAMIC 68pF 5% 50V
C3	1-124-589-11	s ELECT 47uF 20% 10V
C4	1-164-096-11	s CERAMIC 0.01uF 50V
C5	1-164-096-11	s CERAMIC 0.01uF 50V
CN1	1-564-009-11	o CONNECTOR, 10P, MALE
CN2	1-564-002-11	s CONNECTOR, 3P, MALE
DME1	8-745-001-00	s DME DM-211A
IC1	8-759-145-58	s IC UPC4558C
IC2	8-759-729-03	s IC LM2903P
IC3	8-719-985-75	s PHOTO-INTERRUPTER GP1A53HR
IC4	8-719-985-74	s PHOTO-INTERRUPTER GP1A52HR
IC5	8-719-985-74	s PHOTO-INTERRUPTER GP1A52HR
Q1	8-729-030-02	s TRANSISTOR DTC144ESA
R1	1-247-895-00	s CARBON 470K 5% 1/4W
R2	1-247-847-31	s CARBON 4.7K 5% 1/4W
R3	1-247-887-00	s CARBON 220K 5% 1/4W
R4	1-247-863-31	s CARBON 22K 5% 1/4W
R5	1-247-863-31	s CARBON 22K 5% 1/4W
R6	1-247-863-31	s CARBON 22K 5% 1/4W
R7	1-247-895-00	s CARBON 470K 5% 1/4W
R8	1-247-847-31	s CARBON 4.7K 5% 1/4W
R9	1-247-887-00	s CARBON 220K 5% 1/4W
R10	1-247-863-31	s CARBON 22K 5% 1/4W
R11	1-247-863-31	s CARBON 22K 5% 1/4W
R12	1-247-863-31	s CARBON 22K 5% 1/4W
R13	1-249-404-00	s CARBON 82 5% 1/4W
RV1	1-228-472-00	s RES, ADJ, CERMET 2K
RV2	1-228-472-00	s RES, ADJ, CERMET 2K

PTC-71 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8276-619-A	o MOUNTED CIRCUIT BOARD, PTC-71
1pc	3-180-866-01	o BASE, LS SENSOR
CN1	1-564-014-11	s CONNECTOR, 4P, MALE
PH1	8-719-939-05	s PHOTO-INTERRUPTER GP-1S54
PH2	8-719-939-05	s PHOTO-INTERRUPTER GP-1S54
R1	1-249-409-11	s CARBON 220 5% 1/4W
R2	1-249-409-11	s CARBON 220 5% 1/4W

RM-130 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8319-282-A	o MOUNTED CIRCUIT BOARD, RM-130
C1	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V (2012)
C2	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V (2012)
C3	1-126-795-11	s ELECT 10uF 20% 50V
C4	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V (2012)
C5	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V (2012)
C6	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C7	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C8	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C9	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C10	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C11	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C12	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C13	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C14	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C15	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C16	1-126-795-11	s ELECT 10uF 20% 50V
C17	1-126-795-11	s ELECT 10uF 20% 50V
C18	1-126-795-11	s ELECT 10uF 20% 50V
C19	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V (2012)
C20	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V (2012)
C21	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V (2012)
C22	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V (2012)
C23	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V (2012)
C24	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V (2012)
C25	1-163-033-00	s CERAMIC, CHIP 0.022uF 50V (2012)
CN420	1-565-184-11	o CONNECTOR, PS 60P, MALE
CN421	1-563-893-21	s CONNECTOR, D-SUB 50P, FEMALE
D1	8-719-024-81	s DIODE 1SS300
IC2	8-759-349-51	s IC UPD78014GC-673-AB8
IC3	8-759-821-60	s IC L78M12T-FA
IC4	8-759-043-33	s IC LB1721M
IC5	8-759-043-33	s IC LB1721M
IC6	8-759-043-33	s IC LB1721M
IC7	8-759-043-33	s IC LB1721M
IC8	8-759-043-33	s IC LB1721M
IC9	8-759-925-80	s IC SN74HC14ANS
IC10	8-759-925-80	s IC SN74HC14ANS
Q1	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q2	8-729-117-32	s TRANSISTOR 2SC4177-L6
R1	8-719-024-81	s DIODE 1SS300
R2	1-216-085-00	s METAL, CHIP 33K 5% 1/10W (2012)
R3	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R4	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R5	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R6	8-719-024-81	s DIODE 1SS300
R7	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R8	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R9	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R10	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R11	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R12	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R13	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R14	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R15	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R16	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)

(RM-130 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R17	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R18	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R19	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R20	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R21	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R22	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R23	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R24	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R25	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R26	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R27	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R28	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R29	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R30	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R31	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R32	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R33	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R34	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R35	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R36	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R37	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R38	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R39	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R40	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R41	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R42	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R43	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R44	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R45	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R46	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R47	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R48	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R49	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R50	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R51	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R52	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R53	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R54	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R55	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R56	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R57	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R58	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R59	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R60	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R61	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R62	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R63	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R64	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R65	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R66	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R67	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R68	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R69	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R70	1-202-972-61	s RES, FUSIBLE 1.0 5% 1/4W
R71	1-216-295-00	s METAL, CHIP 0 (2012)
R74	1-216-295-00	s METAL, CHIP 0 (2012)
R75	1-216-295-00	s METAL, CHIP 0 (2012)
R77	1-216-295-00	s METAL, CHIP 0 (2012)
R79	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)

(RM-130 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R80	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R81	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R82	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R83	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R84	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
X1	1-579-599-11	s RESONATOR, CERAMIC 8.38 MHz

RM-179 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8319-284-A	o MOUNTED CIRCUIT BOARD, RM-179
C1	1-124-589-11	s ELECT 47uF 20% 10V
C2	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C3	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
CN146	1-506-493-11	s CONNECTOR, 14P, MALE
CN420	1-562-480-11	o CONNECTOR, 10P, MALE
IC1	8-759-469-25	s IC AK6440AF
IC2	8-759-925-80	s IC SN74HC14ANS
R1	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R2	1-216-295-00	s METAL, CHIP 0 (2012)
R3	1-216-295-00	s METAL, CHIP 0 (2012)
R4	1-216-295-00	s METAL, CHIP 0 (2012)
R6	1-216-295-00	s METAL, CHIP 0 (2012)
R7	1-216-295-00	s METAL, CHIP 0 (2012)
R8	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R9	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R10	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R17	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)

RM-181 BOARD for S reel motor

Ref. No. or Q'ty	Part No.	SP Description
CN923	1-563-233-11	o CONNECTOR, FPC/FFC 13P
CN926	1-506-469-11	s CONNECTOR, 4P, MALE
CN927	1-506-468-11	s CONNECTOR, 3P, MALE

RM-181 BOARD for T reel motor

Ref. No. or Q'ty	Part No.	SP Description
CN923	1-563-233-11	o CONNECTOR, FPC/FFC 13P
CN926	1-506-469-11	s CONNECTOR, 4P, MALE
CN927	1-506-468-11	s CONNECTOR, 3P, MALE

SDI-41 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8319-286-A	o MOUNTED CIRCUIT BOARD, SDI-41
1pc	3-179-084-01	s LEVER (R), PC BOARD
1pc	3-179-085-01	s LEVER (L), PC BOARD
C100	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C101	1-115-171-11	s TANTALUM, CHIP 3.3uF 20% 16V (3216)
C102	1-115-171-11	s TANTALUM, CHIP 3.3uF 20% 16V (3216)
C103	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C104	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C106	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C107	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C108	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C109	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C111	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C112	1-107-682-11	s CERAMIC, CHIP 1uF 10% 16V (1608)
C113	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C114	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C115	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C116	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C118	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C119	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C120	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C121	1-162-923-11	s CERAMIC, CHIP 47pF 5% 50V (1608)
C122	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C123	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C124	1-107-682-11	s CERAMIC, CHIP 1uF 10% 16V (1608)
C125	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C126	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C127	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C128	1-162-915-11	s CERAMIC, CHIP 10pF 50V (1608)
C130	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C131	1-115-169-11	s TANTALUM, CHIP 10uF 20% 6.3V (3216)
C132	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C133	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C134	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C135	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C136	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C137	1-115-169-11	s TANTALUM, CHIP 10uF 20% 6.3V (3216)
C138	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C139	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C140	1-162-907-11	s CERAMIC, CHIP 2pF 50V (1608)
C141	1-115-171-11	s TANTALUM, CHIP 3.3uF 20% 16V (3216)
C142	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C143	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C144	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C145	1-115-169-11	s TANTALUM, CHIP 10uF 20% 6.3V (3216)
C146	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C147	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C200	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C201	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C202	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C203	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C204	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C205	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C206	1-107-826-11	s CERAMIC, CHIP 0.1uF 10% 16V (1608)
C207	1-162-957-11	s CERAMIC, CHIP 220pF 5% 50V (1608)
C208	1-115-467-11	s CERAMIC, CHIP 0.22uF 10% 10V (1608)
C209	1-135-179-21	s TANTALUM, CHIP 2.2uF 10% 16V (3216)
C210	1-115-467-11	s CERAMIC, CHIP 0.22uF 10% 10V (1608)

(SDI-41 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C412	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C450	1-162-927-11	s	CERAMIC, CHIP 100pF 5% 50V (1608)
C451	1-115-171-11	s	TANTALUM, CHIP 3.3uF 20% 16V (3216)
C452	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C453	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C454	1-115-171-11	s	TANTALUM, CHIP 3.3uF 20% 16V (3216)
C455	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C456	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C457	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C458	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C459	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C460	1-115-171-11	s	TANTALUM, CHIP 3.3uF 20% 16V (3216)
C461	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C462	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C463	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C464	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C465	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C466	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C467	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C468	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C469	1-115-416-11	s	CERAMIC, CHIP 1000pF 5% 25V (1608)
C470	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C500	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C501	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C502	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C503	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C504	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C505	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C506	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C507	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C508	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C509	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C550	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C551	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C552	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C553	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C554	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C555	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C556	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C557	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C558	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C559	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C560	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C561	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C600	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C601	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C602	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C603	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C604	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C605	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C606	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C607	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C700	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C701	1-115-171-11	s	TANTALUM, CHIP 3.3uF 20% 16V (3216)
C702	1-115-171-11	s	TANTALUM, CHIP 3.3uF 20% 16V (3216)
C703	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C704	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C706	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)
C707	1-107-826-11	s	CERAMIC, CHIP 0.1uF 10% 16V (1608)

(SDI-41 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
CN97	1-778-261-12	o CONNECTOR, B-B 124P, MALE
CN98	1-778-261-12	o CONNECTOR, B-B 124P, MALE
CN100	1-764-243-11	o CONNECTOR, COAXIAL 1P, MALE
CN101	1-764-243-11	o CONNECTOR, COAXIAL 1P, MALE
CN700	1-764-243-11	o CONNECTOR, COAXIAL 1P, MALE
CN701	1-764-243-11	o CONNECTOR, COAXIAL 1P, MALE
CN800	1-764-243-11	o CONNECTOR, COAXIAL 1P, MALE
D200	8-719-941-04	s DIODE SB007-03CP
D201	8-719-941-04	s DIODE SB007-03CP
D300	8-719-987-43	s LED CL-150PG-CD, GRN
D301	8-719-987-43	s LED CL-150PG-CD, GRN
D302	8-719-059-73	s LED CL-150HR-CD, RED
D303	8-719-059-73	s LED CL-150HR-CD, RED
D304	8-719-059-73	s LED CL-150HR-CD, RED
D305	8-719-059-73	s LED CL-150HR-CD, RED
D450	8-719-941-23	s DIODE DA204U
D451	8-719-941-04	s DIODE SB007-03CP
D452	8-719-941-04	s DIODE SB007-03CP
D453	8-719-941-04	s DIODE SB007-03CP
D900	8-719-987-43	s LED CL-150PG-CD, GRN
D901	8-719-987-43	s LED CL-150PG-CD, GRN
FB101	1-543-644-11	s BEAD, FERRITE, CHIP
FB102	1-543-644-11	s BEAD, FERRITE, CHIP
FB104	1-543-644-11	s BEAD, FERRITE, CHIP
FB105	1-543-644-11	s BEAD, FERRITE, CHIP
FB106	1-543-644-11	s BEAD, FERRITE, CHIP
FB107	1-543-644-11	s BEAD, FERRITE, CHIP
FB108	1-543-644-11	s BEAD, FERRITE, CHIP
FB400	1-543-644-11	s BEAD, FERRITE, CHIP
FB450	1-543-644-11	s BEAD, FERRITE, CHIP
FB451	1-543-644-11	s BEAD, FERRITE, CHIP
FB700	1-543-644-11	s BEAD, FERRITE, CHIP
FB702	1-543-644-11	s BEAD, FERRITE, CHIP
FB703	1-543-644-11	s BEAD, FERRITE, CHIP
FB704	1-543-644-11	s BEAD, FERRITE, CHIP
FB705	1-543-644-11	s BEAD, FERRITE, CHIP
FB706	1-543-644-11	s BEAD, FERRITE, CHIP
FB707	1-543-644-11	s BEAD, FERRITE, CHIP
FB801	1-543-644-11	s BEAD, FERRITE, CHIP
FB802	1-543-644-11	s BEAD, FERRITE, CHIP
FB803	1-543-644-11	s BEAD, FERRITE, CHIP
FB804	1-543-644-11	s BEAD, FERRITE, CHIP
FB805	1-543-644-11	s BEAD, FERRITE, CHIP
FL400	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL401	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
IC100	8-759-058-43	s IC NJM3404AV
IC101	8-759-710-88	s IC NJM431U
IC102	8-752-078-34	s IC CXB1342R
IC103	8-759-490-41	s IC TC74VHCT541AFT(EL)
IC104	8-759-490-41	s IC TC74VHCT541AFT(EL)
IC200	8-759-523-78	s IC TC74VHC00FT(EL)
IC201	8-759-082-57	s IC TC7W04FU
IC202	8-759-524-04	s IC TC74VHC125FT(EL)
IC203	8-759-523-94	s IC TC74VHC32FT(EL)
IC204	8-759-523-95	s IC TC74VHC74FT(EL)
IC205	8-759-172-72	s IC CXD8386AQ
IC206	8-759-392-01	s IC TC7SH86FU

(SDI-41 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC207	8-759-271-86	s IC TC7SH04FU
IC208	8-759-523-84	s IC TC74VHC14FT(EL)
IC209	8-759-447-77	s IC TC7WH74FU
IC210	8-759-524-50	s IC TC74VHC541FT(EL)
IC211	8-759-524-50	s IC TC74VHC541FT(EL)
IC212	8-759-524-50	s IC TC74VHC541FT(EL)
IC213	8-759-524-09	s IC TC74VHC153FT
IC214	8-759-524-04	s IC TC74VHC125FT(EL)
IC250	8-759-289-69	s IC CXD8280AQ
IC252	8-759-523-97	s IC TC74VHC123AFT(EL)
IC253	8-759-524-50	s IC TC74VHC541FT(EL)
IC255	8-759-523-81	s IC TC74VHC08FT(EL)
IC256	8-759-523-97	s IC TC74VHC123AFT(EL)
IC300	8-759-491-46	s IC TC74VHCT04AFT
IC301	8-759-344-84	s IC CXD8953Q
IC302	8-759-524-22	s IC TC74VHC175FT(EL)
IC303	8-759-082-57	s IC TC7W04FU
IC304	8-759-082-57	s IC TC7W04FU
IC350	8-759-524-50	s IC TC74VHC541FT(EL)
IC351	8-759-524-50	s IC TC74VHC541FT(EL)
IC352	8-759-175-79	s IC CXD8818R
IC353	8-759-477-86	s IC UPD485506G5-25-7JF
IC354	8-759-477-86	s IC UPD485506G5-25-7JF
IC356	8-759-456-26	s IC 74LCX541MTC
IC357	8-759-524-28	s IC TC74VHC245FT(EL)
IC358	8-759-524-27	s IC TC74VHC244FT(EL)
IC359	8-759-082-57	s IC TC7W04FU
IC400	8-752-360-90	s IC CXD303-101Q
IC406	8-759-175-57	s IC CXD8820AR
IC407	8-759-386-26	s IC 74LCX574MTC
IC408	8-759-386-26	s IC 74LCX574MTC
IC450	8-759-387-54	s IC S-80727-SN-DQ
IC451	8-759-391-30	s IC 74LVX3245QSC
IC452	8-759-277-63	s IC TC7W14FU
IC453	8-759-082-58	s IC TC7W08FU
IC454	8-759-082-57	s IC TC7W04FU
IC455	8-759-582-53	s IC UPD78014FGC-632-AB8
IC456	8-759-524-50	s IC TC74VHC541FT(EL)
IC457	8-759-430-21	s IC MSM6524GS-KR1
IC458	8-759-524-50	s IC TC74VHC541FT(EL)
IC500	8-759-524-27	s IC TC74VHC244FT(EL)
IC501	8-759-391-30	s IC 74LVX3245QSC
IC502	8-759-524-50	s IC TC74VHC541FT(EL)
IC503	8-759-519-12	s IC CXD8281Q
IC550	8-759-524-52	s IC TC74VHC574FT(EL)
IC551	8-759-524-52	s IC TC74VHC574FT(EL)
IC552	8-759-172-73	s IC CXD8385Q
IC553	8-759-447-77	s IC TC7WH74FU
IC554	8-759-082-57	s IC TC7W04FU
IC555	8-759-524-18	s IC TC74VHC163FT(EL)
IC556	8-759-524-18	s IC TC74VHC163FT(EL)
IC557	8-759-082-59	s IC TC7W32FU
IC558	8-759-477-86	s IC UPD485506G5-25-7JF
IC600	8-759-154-60	s IC UPD71055GB-10-3B4
IC601	8-759-344-84	s IC CXD8953Q
IC602	8-759-524-50	s IC TC74VHC541FT(EL)
IC603	8-759-524-50	s IC TC74VHC541FT(EL)
IC700	8-759-058-43	s IC NJM3404AV
IC701	8-759-710-88	s IC NJM431U

(SDI-41 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC702	8-752-078-32	s IC CXB1341R
IC800	8-759-179-75	s IC CXD8845Q
IC802	8-759-344-84	s IC CXD8953Q
IC803	8-759-524-50	s IC TC74VHC541FT(EL)
IC804	8-759-524-50	s IC TC74VHC541FT(EL)
IC805	8-759-058-43	s IC NJM3404AV
IC806	8-752-078-32	s IC CXB1341R
IC807	8-759-710-88	s IC NJM431U
IC900	8-759-524-28	s IC TC74VHC245FT(EL)
IC901	8-759-524-50	s IC TC74VHC541FT(EL)
IC902	8-759-391-30	s IC 74LVX3245QSC
IC903	8-759-271-86	s IC TC7SH04FU
IC904	8-759-524-07	s IC TC74VHC138FT(EL)
IC905	8-759-524-50	s IC TC74VHC541FT(EL)
IC906	8-759-524-28	s IC TC74VHC245FT(EL)
IC907	8-759-524-28	s IC TC74VHC245FT(EL)
IC908	8-759-082-57	s IC TC7W04FU
IC909	8-759-523-83	s IC TC74VHC11FT(EL)
IC910	8-759-154-60	s IC UPD71055GB-10-3B4
IC911	8-759-524-50	s IC TC74VHC541FT(EL)
IC912	8-759-523-79	s IC TC74VHC02FT(EL)
IC913	8-759-154-60	s IC UPD71055GB-10-3B4
L100	1-410-797-11	s INDUCTOR, CHIP 0.015uH (3225)
L900	1-409-579-11	s COIL, CHOKER 8.2uH
L901	1-409-579-11	s COIL, CHOKER 8.2uH
PS900	△ 1-533-272-11	s FUSE, CHIP 4A 125V
Q100	8-729-106-68	s TRANSISTOR 2SC1615A-GP
Q101	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q102	8-729-105-68	s TRANSISTOR 2SC3356-K
Q103	8-729-105-68	s TRANSISTOR 2SC3356-K
Q104	8-729-105-68	s TRANSISTOR 2SC3356-K
Q450	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q700	8-729-106-68	s TRANSISTOR 2SC1615A-GP
Q701	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q702	8-729-105-68	s TRANSISTOR 2SC3356-K
Q703	8-729-105-68	s TRANSISTOR 2SC3356-K
Q704	8-729-105-68	s TRANSISTOR 2SC3356-K
Q705	8-729-105-68	s TRANSISTOR 2SC3356-K
Q706	8-729-105-68	s TRANSISTOR 2SC3356-K
Q707	8-729-105-68	s TRANSISTOR 2SC3356-K
Q708	8-729-105-68	s TRANSISTOR 2SC3356-K
Q709	8-729-105-68	s TRANSISTOR 2SC3356-K
Q710	8-729-105-68	s TRANSISTOR 2SC3356-K
Q711	8-729-105-68	s TRANSISTOR 2SC3356-K
Q712	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q713	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q800	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q801	8-729-105-68	s TRANSISTOR 2SC3356-K
Q802	8-729-105-68	s TRANSISTOR 2SC3356-K
Q803	8-729-105-68	s TRANSISTOR 2SC3356-K
Q804	8-729-105-68	s TRANSISTOR 2SC3356-K
Q805	8-729-105-68	s TRANSISTOR 2SC3356-K
Q806	8-729-105-68	s TRANSISTOR 2SC3356-K
Q807	8-729-106-68	s TRANSISTOR 2SC1615A-GP
R100	1-218-711-11	s METAL, CHIP 6.2K 0.5% 1/16W (1608)
R101	1-218-699-11	s METAL, CHIP 2.0K 0.5% 1/16W (1608)
R102	1-218-710-11	s METAL, CHIP 5.6K 0.5% 1/16W (1608)

(SDI-41 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R103	1-218-678-11	s METAL, CHIP 270 0.5% 1/16W (1608)
R104	1-220-259-11	s METAL, CHIP 150 5% 1/4W (3225)
R105	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R106	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R107	1-218-697-11	s METAL, CHIP 1.6K 0.5% 1/16W (1608)
R108	1-218-709-11	s METAL, CHIP 5.1K 0.5% 1/16W (1608)
R109	1-218-712-11	s METAL, CHIP 6.8K 0.5% 1/16W (1608)
R110	1-216-864-11	s METAL, CHIP 0 (1608)
R111	1-216-864-11	s METAL, CHIP 0 (1608)
R112	1-218-700-11	s METAL, CHIP 2.2K 0.5% 1/16W (1608)
R113	1-218-684-11	s METAL, CHIP 470 0.5% 1/16W (1608)
R114	1-218-684-11	s METAL, CHIP 470 0.5% 1/16W (1608)
R115	1-218-718-11	s METAL, CHIP 12K 0.5% 1/16W (1608)
R117	1-218-665-11	s METAL, CHIP 75 0.5% 1/16W (1608)
R118	1-218-700-11	s METAL, CHIP 2.2K 0.5% 1/16W (1608)
R119	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R120	1-216-864-11	s METAL, CHIP 0 (1608)
R121	1-218-665-11	s METAL, CHIP 75 0.5% 1/16W (1608)
R122	1-218-665-11	s METAL, CHIP 75 0.5% 1/16W (1608)
R123	1-216-857-11	s METAL, CHIP 1.0M 5% 1/16W (1608)
R124	1-218-700-11	s METAL, CHIP 2.2K 0.5% 1/16W (1608)
R126	1-218-665-11	s METAL, CHIP 75 0.5% 1/16W (1608)
R127	1-218-665-11	s METAL, CHIP 75 0.5% 1/16W (1608)
R128	1-218-644-11	s METAL, CHIP 10 0.5% 1/16W (1608)
R129	1-218-644-11	s METAL, CHIP 10 0.5% 1/16W (1608)
R130	1-218-644-11	s METAL, CHIP 10 0.5% 1/16W (1608)
R131	1-218-644-11	s METAL, CHIP 10 0.5% 1/16W (1608)
R133	1-218-678-11	s METAL, CHIP 270 0.5% 1/16W (1608)
R134	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R135	1-218-678-11	s METAL, CHIP 270 0.5% 1/16W (1608)
R136	1-216-612-11	s METAL, CHIP 24 0.5% 1/10W (2012)
R137	1-216-618-11	s METAL, CHIP 43 0.5% 1/10W (2012)
R138	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R139	1-216-612-11	s METAL, CHIP 24 0.5% 1/10W (2012)
R140	1-216-649-11	s METAL, CHIP 820 0.5% 1/10W (2012)
R141	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R142	1-218-668-11	s METAL, CHIP 100 0.5% 1/16W (1608)
R143	1-218-668-11	s METAL, CHIP 100 0.5% 1/16W (1608)
R144	1-218-668-11	s METAL, CHIP 100 0.5% 1/16W (1608)
R145	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R146	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R147	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R148	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R149	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R200	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R201	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R202	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R204	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R206	1-218-668-11	s METAL, CHIP 100 0.5% 1/16W (1608)
R207	1-218-722-11	s METAL, CHIP 18K 0.5% 1/16W (1608)
R208	1-218-700-11	s METAL, CHIP 2.2K 0.5% 1/16W (1608)
R209	1-218-718-11	s METAL, CHIP 12K 0.5% 1/16W (1608)
R210	1-216-854-11	s METAL, CHIP 560K 5% 1/16W (1608)
R211	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R212	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R215	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R220	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R250	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R251	1-216-854-11	s METAL, CHIP 560K 5% 1/16W (1608)

(SDI-41 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R252	1-216-854-11	s METAL, CHIP 560K 5% 1/16W (1608)
R253	1-216-854-11	s METAL, CHIP 560K 5% 1/16W (1608)
R254	1-216-854-11	s METAL, CHIP 560K 5% 1/16W (1608)
R300	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R301	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R302	1-218-668-11	s METAL, CHIP 100 0.5% 1/16W (1608)
R303	1-218-668-11	s METAL, CHIP 100 0.5% 1/16W (1608)
R304	1-216-647-11	s METAL, CHIP 680 0.5% 1/10W (2012)
R305	1-216-647-11	s METAL, CHIP 680 0.5% 1/10W (2012)
R306	1-216-647-11	s METAL, CHIP 680 0.5% 1/10W (2012)
R307	1-216-647-11	s METAL, CHIP 680 0.5% 1/10W (2012)
R308	1-216-647-11	s METAL, CHIP 680 0.5% 1/10W (2012)
R309	1-216-647-11	s METAL, CHIP 680 0.5% 1/10W (2012)
R350	1-216-864-11	s METAL, CHIP 0 (1608)
R351	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R353	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R354	1-216-864-11	s METAL, CHIP 0 (1608)
R355	1-218-668-11	s METAL, CHIP 100 0.5% 1/16W (1608)
R356	1-216-864-11	s METAL, CHIP 0 (1608)
R400	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R404	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R405	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R450	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R451	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R452	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R453	1-218-668-11	s METAL, CHIP 100 0.5% 1/16W (1608)
R454	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R455	1-218-716-11	s METAL, CHIP 10K 0.5% 1/16W (1608)
R456	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R457	1-218-680-11	s METAL, CHIP 330 0.5% 1/16W (1608)
R458	1-218-694-11	s METAL, CHIP 1.2K 0.5% 1/16W (1608)
R459	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R460	1-218-716-11	s METAL, CHIP 10K 0.5% 1/16W (1608)
R461	1-218-716-11	s METAL, CHIP 10K 0.5% 1/16W (1608)
R462	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R463	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R464	1-218-740-11	s METAL, CHIP 100K 0.5% 1/16W (1608)
R465	1-216-864-11	s METAL, CHIP 0 (1608)
R466	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R467	1-216-864-11	s METAL, CHIP 0 (1608)
R468	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R500	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R501	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R503	1-216-864-11	s METAL, CHIP 0 (1608)
R507	1-216-864-11	s METAL, CHIP 0 (1608)
R508	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R550	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R551	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R553	1-216-864-11	s METAL, CHIP 0 (1608)
R555	1-216-864-11	s METAL, CHIP 0 (1608)
R558	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R560	1-216-864-11	s METAL, CHIP 0 (1608)
R562	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R600	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R700	1-218-711-11	s METAL, CHIP 6.2K 0.5% 1/16W (1608)
R701	1-218-701-11	s METAL, CHIP 2.4K 0.5% 1/16W (1608)
R702	1-218-710-11	s METAL, CHIP 5.6K 0.5% 1/16W (1608)
R703	1-218-668-11	s METAL, CHIP 100 0.5% 1/16W (1608)
R704	1-220-259-11	s METAL, CHIP 150 5% 1/4W (3225)

(SDI-41 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R705	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R706	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R707	1-218-712-11	s METAL, CHIP 6.8K 0.5% 1/16W (1608)
R708	1-218-697-11	s METAL, CHIP 1.6K 0.5% 1/16W (1608)
R709	1-218-709-11	s METAL, CHIP 5.1K 0.5% 1/16W (1608)
R710	1-216-864-11	s METAL, CHIP 0 (1608)
R711	1-218-684-11	s METAL, CHIP 470 0.5% 1/16W (1608)
R712	1-216-864-11	s METAL, CHIP 0 (1608)
R713	1-218-700-11	s METAL, CHIP 2.2K 0.5% 1/16W (1608)
R714	1-218-720-11	s METAL, CHIP 15K 0.5% 1/16W (1608)
R715	1-218-720-11	s METAL, CHIP 15K 0.5% 1/16W (1608)
R716	1-218-718-11	s METAL, CHIP 12K 0.5% 1/16W (1608)
R718	1-218-700-11	s METAL, CHIP 2.2K 0.5% 1/16W (1608)
R719	1-218-700-11	s METAL, CHIP 2.2K 0.5% 1/16W (1608)
R720	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R721	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R722	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R723	1-218-696-11	s METAL, CHIP 1.5K 0.5% 1/16W (1608)
R725	1-218-678-11	s METAL, CHIP 270 0.5% 1/16W (1608)
R726	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R727	1-218-678-11	s METAL, CHIP 270 0.5% 1/16W (1608)
R728	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R729	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R730	1-216-610-11	s METAL, CHIP 20 0.5% 1/10W (2012)
R731	1-216-618-11	s METAL, CHIP 43 0.5% 1/10W (2012)
R732	1-218-678-11	s METAL, CHIP 270 0.5% 1/16W (1608)
R733	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R734	1-218-674-11	s METAL, CHIP 180 0.5% 1/16W (1608)
R735	1-216-612-11	s METAL, CHIP 24 0.5% 1/10W (2012)
R736	1-216-618-11	s METAL, CHIP 43 0.5% 1/10W (2012)
R737	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R738	1-216-613-11	s METAL, CHIP 27 0.5% 1/10W (2012)
R739	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R740	1-218-711-11	s METAL, CHIP 6.2K 0.5% 1/16W (1608)
R741	1-218-716-11	s METAL, CHIP 10K 0.5% 1/16W (1608)
R742	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R743	1-216-612-11	s METAL, CHIP 24 0.5% 1/10W (2012)
R744	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R745	1-216-624-11	s METAL, CHIP 75 0.5% 1/10W (2012)
R746	1-216-613-11	s METAL, CHIP 27 0.5% 1/10W (2012)
R747	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R748	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R749	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R750	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R751	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R752	1-216-295-00	s METAL, CHIP 0 (2012)
R753	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R754	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R755	1-216-295-00	s METAL, CHIP 0 (2012)
R756	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R757	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R758	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R759	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R760	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R801	1-218-728-11	s METAL, CHIP 33K 0.5% 1/16W (1608)
R802	1-218-728-11	s METAL, CHIP 33K 0.5% 1/16W (1608)
R803	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R804	1-218-676-11	s METAL, CHIP 220 0.5% 1/16W (1608)
R821	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)

(SDI-41 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R822	1-218-711-11	s METAL, CHIP 6.2K 0.5% 1/16W (1608)
R823	1-218-701-11	s METAL, CHIP 2.4K 0.5% 1/16W (1608)
R824	1-218-710-11	s METAL, CHIP 5.6K 0.5% 1/16W (1608)
R825	1-218-678-11	s METAL, CHIP 270 0.5% 1/16W (1608)
R826	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R827	1-218-712-11	s METAL, CHIP 6.8K 0.5% 1/16W (1608)
R828	1-216-864-11	s METAL, CHIP 0 (1608)
R829	1-218-684-11	s METAL, CHIP 470 0.5% 1/16W (1608)
R830	1-216-864-11	s METAL, CHIP 0 (1608)
R831	1-218-700-11	s METAL, CHIP 2.2K 0.5% 1/16W (1608)
R832	1-218-720-11	s METAL, CHIP 15K 0.5% 1/16W (1608)
R833	1-218-720-11	s METAL, CHIP 15K 0.5% 1/16W (1608)
R834	1-218-718-11	s METAL, CHIP 12K 0.5% 1/16W (1608)
R836	1-218-700-11	s METAL, CHIP 2.2K 0.5% 1/16W (1608)
R837	1-218-700-11	s METAL, CHIP 2.2K 0.5% 1/16W (1608)
R838	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R839	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R840	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R841	1-218-696-11	s METAL, CHIP 1.5K 0.5% 1/16W (1608)
R842	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R843	1-218-678-11	s METAL, CHIP 270 0.5% 1/16W (1608)
R844	1-218-678-11	s METAL, CHIP 270 0.5% 1/16W (1608)
R845	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R846	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R847	1-216-610-11	s METAL, CHIP 20 0.5% 1/10W (2012)
R848	1-216-618-11	s METAL, CHIP 43 0.5% 1/10W (2012)
R849	1-218-678-11	s METAL, CHIP 270 0.5% 1/16W (1608)
R850	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R851	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R852	1-218-711-11	s METAL, CHIP 6.2K 0.5% 1/16W (1608)
R853	1-218-716-11	s METAL, CHIP 10K 0.5% 1/16W (1608)
R854	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R855	1-218-674-11	s METAL, CHIP 180 0.5% 1/16W (1608)
R856	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R857	1-216-612-11	s METAL, CHIP 24 0.5% 1/10W (2012)
R858	1-216-618-11	s METAL, CHIP 43 0.5% 1/10W (2012)
R859	1-216-612-11	s METAL, CHIP 24 0.5% 1/10W (2012)
R860	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R861	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R862	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R863	1-218-692-11	s METAL, CHIP 1.0K 0.5% 1/16W (1608)
R864	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R865	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R866	1-220-259-11	s METAL, CHIP 150 5% 1/4W (3225)
R867	1-218-660-11	s METAL, CHIP 47 0.5% 1/16W (1608)
R868	1-218-697-11	s METAL, CHIP 1.6K 0.5% 1/16W (1608)
R869	1-218-709-11	s METAL, CHIP 5.1K 0.5% 1/16W (1608)
R900	1-216-647-11	s METAL, CHIP 680 0.5% 1/10W (2012)
R901	1-216-647-11	s METAL, CHIP 680 0.5% 1/10W (2012)
RB100	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB101	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB102	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB200	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB201	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB250	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB251	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB300	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB301	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB350	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)

(SDI-41 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB351	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB352	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB353	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB354	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB355	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB356	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB450	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB451	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB452	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB453	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB454	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB455	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB500	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB501	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB550	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB551	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB600	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB601	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB602	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB603	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB604	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB605	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB606	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB700	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB701	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB702	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB801	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB802	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB803	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB804	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB805	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB806	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB807	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB808	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB809	1-236-904-11	s RES, NETWORK, CHIP 1Kx4 (3216)
RB900	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB901	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB902	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB903	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB904	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB905	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB906	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB907	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB908	1-233-936-11	s RES, NETWORK, CHIP 10x4 (3216)
RB909	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB910	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB911	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB912	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB913	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB914	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB915	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB916	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)

SE-344 BOARD

Ref. No.
or Q'ty Part No. SP Description

The components on this board are out of spare parts.
When component replacement is required, replace by the
assembly (including mounted circuit board) below.

A-8278-310-A s FG ASSY, REEL

SE-461 BOARD

Ref. No.
or Q'ty Part No. SP Description

1pc A-8323-236-A o MOUNTED CIRCUIT BOARD, SE-461E
1pc 7-621-772-00 s SCREW +B 2x3
2pcs 7-685-871-01 s SCREW +BVT 3x6 (S)
1pc 3-603-396-01 o BRACKET, DEW SENSOR

C1 1-163-275-11 s CERAMIC, CHIP 1000pF 5% 50V (2012)
C2 1-163-275-11 s CERAMIC, CHIP 1000pF 5% 50V (2012)

CN1 1-506-472-11 s CONNECTOR, 7P, MALE
CN2 1-750-669-11 s CONNECTOR, FPC/FFC 13P

DS1 1-810-657-11 s SENSOR, DEW CONDENSATION

E1 1-535-881-21 o TERMINAL, TP

R1 1-216-067-00 s METAL, CHIP 5.6K 5% 1/10W (2012)
R2 1-216-067-00 s METAL, CHIP 5.6K 5% 1/10W (2012)
R6 1-216-296-00 s METAL, CHIP 0 (3216)

TP1 1-535-881-21 o TERMINAL, TP
TP2 1-535-881-21 o TERMINAL, TP

SS-83 BOARD

Ref. No.
or Q'ty Part No. SP Description

1pc A-8323-242-A o MOUNTED CIRCUIT BOARD, SS-83E
1pc 3-171-453-03 o PLATE (L), SHIELD, CARD
1pc 3-171-454-02 o SHEET (L), CARD
6pcs 7-682-902-11 s SCREW +PWH 2.6x5
1pc 3-179-084-01 s LEVER (R), PC BOARD

1pc 3-179-085-01 s LEVER (L), PC BOARD

BT710 1-767-156-11 s BATTERY, M4T28-BR12SH1

C8 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C9 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C100 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C101 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C102 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

C103 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C104 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C105 1-128-397-21 s ELECT 100uF 20% 16V
C106 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C107 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

C108 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C109 1-128-397-21 s ELECT 100uF 20% 16V
C110 1-128-397-21 s ELECT 100uF 20% 16V
C111 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C112 1-128-397-21 s ELECT 100uF 20% 16V

C113 1-128-397-21 s ELECT 100uF 20% 16V
C114 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C115 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C116 1-128-397-21 s ELECT 100uF 20% 16V
C117 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

C118 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C119 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C120 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C121 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C122 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

C123 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C124 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C125 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C126 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C127 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

C128 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C129 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C130 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C131 1-104-760-11 s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C132 1-126-401-11 s ELECT, CHIP 1.0uF 20% 50V

C133 1-104-760-11 s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C134 1-104-760-11 s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C135 1-104-760-11 s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C136 1-163-251-11 s CERAMIC, CHIP 100pF 5% 50V (2012)
C137 1-163-251-11 s CERAMIC, CHIP 100pF 5% 50V (2012)

C138 1-163-251-11 s CERAMIC, CHIP 100pF 5% 50V (2012)
C139 1-163-251-11 s CERAMIC, CHIP 100pF 5% 50V (2012)
C142 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C143 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C144 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

C145 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C146 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C147 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C148 1-104-760-11 s CERAMIC, CHIP 0.047uF 10% 50V(2012)
C149 1-104-760-11 s CERAMIC, CHIP 0.047uF 10% 50V(2012)

(SS-83 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C728	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C729	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C730	1-163-243-11	s	CERAMIC, CHIP 47pF 5% 50V (2012)
C731	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C732	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C770	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C771	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C772	1-113-991-11	s	TANTALUM, CHIP 33uF 20% 16V (6032)
C773	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C774	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C775	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C776	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C777	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C778	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C779	1-113-991-11	s	TANTALUM, CHIP 33uF 20% 16V (6032)
C780	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C781	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C900	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C901	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C902	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C903	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C904	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C905	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C906	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C907	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1100	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V (2012)
C1101	1-163-239-11	s	CERAMIC, CHIP 33pF 5% 50V (2012)
C1102	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1103	1-163-227-11	s	CERAMIC, CHIP 10pF 5% 50V (2012)
C1104	1-163-227-11	s	CERAMIC, CHIP 10pF 5% 50V (2012)
C1105	1-163-227-11	s	CERAMIC, CHIP 10pF 5% 50V (2012)
C1106	1-163-227-11	s	CERAMIC, CHIP 10pF 5% 50V (2012)
C1107	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1108	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1109	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1110	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1111	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1112	1-128-400-11	s	ELECT 47uF 20% 25V
C1113	1-128-400-11	s	ELECT 47uF 20% 25V
C1114	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1115	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1116	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1117	1-128-400-11	s	ELECT 47uF 20% 25V
C1118	1-128-400-11	s	ELECT 47uF 20% 25V
C1119	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1120	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1121	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1122	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1123	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1124	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1125	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1126	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1127	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1128	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1129	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1130	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1131	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1132	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1133	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)

(SS-83 BOARD)

[illegible]

(SS-83 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C2128	1-113-991-11	s	TANTALUM, CHIP 33uF 20% 16V (6032)
C2131	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C2300	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V (2012)
C2301	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V (2012)
C2302	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C2303	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C2304	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C2305	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C2306	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C2307	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C2308	1-113-991-11	s	TANTALUM, CHIP 33uF 20% 16V (6032)
C2309	1-113-991-11	s	TANTALUM, CHIP 33uF 20% 16V (6032)
C2500	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C2503	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C2504	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C2505	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C2506	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C2507	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C2720	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
CN1	1-506-482-11	o	CONNECTOR, 3P, MALE
CN122	1-778-261-12	o	CONNECTOR, B-B 124P, MALE
CN123	1-778-261-12	o	CONNECTOR, B-B 124P, MALE
CN124	1-778-262-12	o	CONNECTOR, B-B 148P, MALE
CN700	1-506-484-11	s	CONNECTOR, 5P, MALE
CN701	1-506-486-11	s	CONNECTOR, 7P, MALE
CN1100	1-506-482-31	o	CONNECTOR, 3P, MALE
CN1101	1-565-780-11	o	CONNECTOR, 50P, MALE
CN1102	1-506-484-11	s	CONNECTOR, 5P, MALE
CN1900	1-506-484-11	s	CONNECTOR, 5P, MALE
CN1901	1-506-482-11	o	CONNECTOR, 3P, MALE
COR100	1-566-388-11	s	CONNECTOR, 8P, MALE
COR101	1-566-388-11	s	CONNECTOR, 8P, MALE
D100	8-719-941-23	s	DIODE DA204U
D101	8-719-941-23	s	DIODE DA204U
D102	8-719-941-23	s	DIODE DA204U
D103	8-719-941-23	s	DIODE DA204U
D104	8-719-028-24	s	DIODE 1SS154
D105	8-719-941-23	s	DIODE DA204U
D106	8-719-941-23	s	DIODE DA204U
D107	8-719-941-23	s	DIODE DA204U
D108	8-719-026-16	s	LED CL-150D-CD, ORG
D109	8-719-941-23	s	DIODE DA204U
D110	8-719-941-23	s	DIODE DA204U
D111	8-719-941-23	s	DIODE DA204U
D112	8-719-026-16	s	LED CL-150D-CD, ORG
D300	8-719-024-81	s	DIODE 1SS300
D301	8-719-026-16	s	LED CL-150D-CD, ORG
D1100	8-719-210-33	s	DIODE EC10DS2
D1101	8-719-210-33	s	DIODE EC10DS2
D1102	8-719-987-43	s	LED CL-150PG-CD, GRN
D1103	8-719-987-43	s	LED CL-150PG-CD, GRN
D1104	8-719-987-43	s	LED CL-150PG-CD, GRN
D1105	8-719-989-22	s	LED CL-150R-CD, RED
D1106	8-719-024-81	s	DIODE 1SS300
D1900	8-719-210-33	s	DIODE EC10DS2
D1901	8-719-210-33	s	DIODE EC10DS2
D1902	8-719-987-43	s	LED CL-150PG-CD, GRN

(SS-83 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D1903	8-719-987-43	s	LED CL-150PG-CD, GRN
D1904	8-719-987-43	s	LED CL-150PG-CD, GRN
D1905	8-719-989-22	s	LED CL-150R-CD, RED
IC100	8-759-009-07	s	IC MC14053BF
IC101	8-759-009-05	s	IC MC14051BF
IC102	8-759-510-71	s	IC BA10358F
IC103	8-759-348-69	s	IC HD6415108RF10
IC104	8-759-049-58	s	IC SN74HC04APW
IC105	8-759-987-82	s	IC 74AC00SJ
IC106	8-759-049-72	s	IC SN74HC139APW
IC107	8-759-985-25	s	IC 74AC32SJ
IC108	8-759-985-18	s	IC 74AC08SJ
IC109	8-759-545-80	s	IC LC3564BM-70-TLM
IC110	8-759-545-80	s	IC LC3564BM-70-TLM
IC111	8-759-985-25	s	IC 74AC32SJ
IC112	8-759-649-51	s	IC MBM29F400BC-SV131/V1.31,FlashROM
IC113	8-759-049-55	s	IC SN74HC00APW
IC114	8-759-049-60	s	IC SN74HC08APW
IC115	8-752-381-84	s	IC CXD1095BQ
IC116	8-759-009-07	s	IC MC14053BF
IC300	8-759-241-07	s	IC TC74HC193AF
IC301	8-759-009-51	s	IC MC14538BF
IC302	8-759-009-07	s	IC MC14053BF
IC303	8-759-009-05	s	IC MC14051BF
IC304	8-759-050-00	s	IC SN74HC86APW
IC305	8-759-009-07	s	IC MC14053BF
IC306	8-759-925-05	s	IC LM2903PS
IC307	8-759-100-95	s	IC UPC324G2
IC308	8-759-049-58	s	IC SN74HC04APW
IC310	8-759-009-07	s	IC MC14053BF
IC312	8-759-049-98	s	IC SN74HC74APW
IC313	8-752-343-05	s	IC CXD2202Q
IC314	8-752-877-94	s	IC CXP87132-086Q
IC315	8-759-524-27	s	IC TC74VHC244FT(EL)
IC316	8-759-524-27	s	IC TC74VHC244FT(EL)
IC319	8-759-049-88	s	IC SN74HCT245APW
IC320	8-759-524-27	s	IC TC74VHC244FT(EL)
IC321	8-759-049-55	s	IC SN74HC00APW
IC500	8-752-381-84	s	IC CXD1095BQ
IC502	8-759-049-88	s	IC SN74HCT245APW
IC700	8-759-050-06	s	IC SN74HC157APW
IC701	8-759-380-62	s	IC ADM691AR
IC702	8-759-524-27	s	IC TC74VHC244FT(EL)
IC704	8-759-485-19	s	IC IDT79R3041-20PF
IC705	8-759-524-51	s	IC TC74VHC573FT(EL)
IC706	8-759-524-51	s	IC TC74VHC573FT(EL)
IC707	8-759-524-51	s	IC TC74VHC573FT(EL)
IC708	8-759-524-51	s	IC TC74VHC573FT(EL)
IC709	8-759-524-28	s	IC TC74VHC245FT(EL)
IC710	8-759-296-31	s	IC M48T18-100MH1TR
IC711	--Pending---	o	IC AM29F040B-120JC, FLASH-ROM
IC712	8-759-560-89	s	IC MB3761PF
IC713	--Pending---	o	IC AM29F040B-120JC, FLASH-ROM
IC715	8-759-049-96	s	IC SN74HC32APW
IC719	8-759-648-63	s	IC KM684000BLT-5LT
IC721	8-759-648-63	s	IC KM684000BLT-5LT
IC722	8-759-648-63	s	IC KM684000BLT-5LT
IC723	8-759-648-63	s	IC KM684000BLT-5LT

(SS-83 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC724	8-759-049-92	s IC	SN74HC14APW
IC725	8-759-985-17	s IC	74AC04SJ
IC900	8-759-271-86	s IC	TC7SH04FU
IC901	8-759-524-08	s IC	TC74VHC139FT
IC902	8-759-523-92	s IC	TC74VHC21FT(EL)
IC903	8-759-523-94	s IC	TC74VHC32FT(EL)
IC904	8-759-523-95	s IC	TC74VHC74FT(EL)
IC1100	8-759-049-58	s IC	SN74HC04APW
IC1101	8-759-491-46	s IC	TC74VHCT04AFT
IC1102	8-759-190-79	s IC	UPD72001GC-11-3B6
IC1103	8-759-049-55	s IC	SN74HC00APW
IC1104	8-759-092-26	s IC	DS3691M
IC1105	8-759-479-32	s IC	SN75C1168NS-E05
IC1106	8-759-923-64	s IC	AM26LS32ACNS
IC1107	8-759-429-27	s IC	CXD9001AR
IC1108	8-759-466-50	s IC	NJM78M12DLA
IC1109	8-759-466-51	s IC	NJM79M12DLA
IC1110	8-759-031-69	s IC	MC1488M
IC1111	8-759-031-68	s IC	MC1489AM
IC1112	8-759-049-60	s IC	SN74HC08APW
IC1113	8-759-049-96	s IC	SN74HC32APW
IC1114	8-759-049-96	s IC	SN74HC32APW
IC1115	8-759-523-94	s IC	TC74VHC32FT(EL)
IC1300	8-759-049-98	s IC	SN74HC74APW
IC1302	8-759-049-60	s IC	SN74HC08APW
IC1303	8-759-049-60	s IC	SN74HC08APW
IC1304	8-759-049-96	s IC	SN74HC32APW
IC1305	8-759-050-12	s IC	SN74HC174APW
IC1306	8-759-050-00	s IC	SN74HC86APW
IC1307	8-759-271-86	s IC	TC7SH04FU
IC1308	8-759-539-53	s IC	MB90096PF-G-139-BND-ER
IC1400	8-759-545-80	s IC	LC3564BM-70-TLM
IC1401	8-759-175-56	s IC	CXD8804Q
IC1402	8-759-051-48	s IC	SN74HCT541APW
IC1403	8-759-049-88	s IC	SN74HCT245APW
IC1404	8-759-049-88	s IC	SN74HCT245APW
IC1405	8-759-049-88	s IC	SN74HCT245APW
IC1406	8-759-049-96	s IC	SN74HC32APW
IC1407	8-759-049-66	s IC	SN74HC125APW
IC1408	8-759-049-88	s IC	SN74HCT245APW
IC1409	8-759-049-88	s IC	SN74HCT245APW
IC1410	8-759-049-88	s IC	SN74HCT245APW
IC1411	8-759-049-88	s IC	SN74HCT245APW
IC1412	8-759-049-88	s IC	SN74HCT245APW
IC1500	8-759-491-46	s IC	TC74VHCT04AFT
IC1501	8-759-524-27	s IC	TC74VHC244FT(EL)
IC1502	8-759-050-06	s IC	SN74HC157APW
IC1503	8-759-524-18	s IC	TC74VHC163FT(EL)
IC1504	8-759-524-18	s IC	TC74VHC163FT(EL)
IC1505	8-759-485-19	s IC	IDT79R3041-20PF
IC1506	8-759-524-51	s IC	TC74VHC573FT(EL)
IC1507	8-759-524-51	s IC	TC74VHC573FT(EL)
IC1508	8-759-524-51	s IC	TC74VHC573FT(EL)
IC1509	8-759-524-51	s IC	TC74VHC573FT(EL)
IC1510	8-759-523-94	s IC	TC74VHC32FT(EL)
IC1511	8-759-524-28	s IC	TC74VHC245FT(EL)
IC1512	--Pending---	o IC	AM29F040B-120JC, FLASH-ROM
IC1513	8-759-648-63	s IC	KM684000BLT-5LT
IC1514	8-759-648-63	s IC	KM684000BLT-5LT

(SS-83 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1515	8-759-648-63	s IC	KM684000BLT-5LT
IC1516	8-759-648-63	s IC	KM684000BLT-5LT
IC1700	8-759-271-86	s IC	TC7SH04FU
IC1701	8-759-049-76	s IC	SN74HC244APW
IC1702	8-759-523-92	s IC	TC74VHC21FT(EL)
IC1703	8-759-524-08	s IC	TC74VHC139FT
IC1704	8-759-524-07	s IC	TC74VHC138FT(EL)
IC1705	8-759-524-07	s IC	TC74VHC138FT(EL)
IC1706	8-759-523-94	s IC	TC74VHC32FT(EL)
IC1707	8-759-523-95	s IC	TC74VHC74FT(EL)
IC1708	8-759-271-86	s IC	TC7SH04FU
IC1709	8-759-523-94	s IC	TC74VHC32FT(EL)
IC1733	8-759-523-81	s IC	TC74VHC08FT(EL)
IC1900	8-759-050-00	s IC	SN74HC86APW
IC1901	8-759-049-98	s IC	SN74HC74APW
IC1902	8-759-049-58	s IC	SN74HC04APW
IC1903	8-759-429-27	s IC	CXD9001AR
IC1904	8-759-031-69	s IC	MC1488M
IC1905	8-759-049-58	s IC	SN74HC04APW
IC1906	8-759-031-68	s IC	MC1489AM
IC1907	8-759-049-55	s IC	SN74HC00APW
IC2100	8-759-545-80	s IC	LC3564BM-70-TLM
IC2101	8-759-049-92	s IC	SN74HC14APW
IC2102	8-759-051-48	s IC	SN74HCT541APW
IC2103	8-759-175-56	s IC	CXD8804Q
IC2104	8-759-049-55	s IC	SN74HC00APW
IC2105	8-759-049-55	s IC	SN74HC00APW
IC2106	8-759-050-39	s IC	SN74HC574APW
IC2107	8-759-545-80	s IC	LC3564BM-70-TLM
IC2108	8-759-175-56	s IC	CXD8804Q
IC2109	8-759-491-46	s IC	TC74VHCT04AFT
IC2110	8-759-391-30	s IC	74LVX3245QSC
IC2111	8-759-391-30	s IC	74LVX3245QSC
IC2112	8-759-391-30	s IC	74LVX3245QSC
IC2113	8-759-391-30	s IC	74LVX3245QSC
IC2114	8-759-391-30	s IC	74LVX3245QSC
IC2115	8-759-391-30	s IC	74LVX3245QSC
IC2116	8-759-391-30	s IC	74LVX3245QSC
IC2117	8-759-391-30	s IC	74LVX3245QSC
IC2120	8-759-491-47	s IC	TC74VHCT08AFT
IC2300	8-759-049-92	s IC	SN74HC14APW
IC2301	8-759-175-77	s IC	CXD8384Q
IC2302	8-759-390-68	s IC	CXD8990R
IC2500	8-759-973-43	s IC	MB8421-90LPFQ
IC2503	8-759-973-43	s IC	MB8421-90LPFQ
IC2706	8-759-491-46	s IC	TC74VHCT04AFT
IS711	1-540-151-21	s SOCKET, PLCC	IC 32P
IS713	1-540-151-21	s SOCKET, PLCC	IC 32P
IS1512	1-540-151-21	s SOCKET, PLCC	IC 32P
IS1521	1-540-151-21	s SOCKET, PLCC	IC 32P
L101	1-406-864-21	s COIL, CHOKE	4.7uH
L102	1-406-864-21	s COIL, CHOKE	4.7uH
L103	1-406-864-21	s COIL, CHOKE	4.7uH
L104	1-406-864-21	s COIL, CHOKE	4.7uH
L2700	1-411-755-11	s COIL, CHOKE	47uH
PS100	△ 1-533-266-11	s FUSE, CHIP	3.15A 125V
PS101	△ 1-533-271-21	s FUSE, CHIP	0.5A 125V

(SS-83 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q701	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q1100	8-729-924-62	s TRANSISTOR DTC113ZU
Q1101	8-729-924-62	s TRANSISTOR DTC113ZU
Q1102	8-729-924-62	s TRANSISTOR DTC113ZU
Q1103	8-729-924-62	s TRANSISTOR DTC113ZU
Q1900	8-729-924-62	s TRANSISTOR DTC113ZU
Q1901	8-729-924-62	s TRANSISTOR DTC113ZU
Q1902	8-729-924-62	s TRANSISTOR DTC113ZU
Q1903	8-729-924-62	s TRANSISTOR DTC113ZU
R100	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R101	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R102	1-216-295-00	s METAL, CHIP 0 (2012)
R103	1-216-295-00	s METAL, CHIP 0 (2012)
R104	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R105	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R106	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R107	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R108	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R109	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R111	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R112	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R113	1-216-085-00	s METAL, CHIP 33K 5% 1/10W (2012)
R114	1-216-109-00	s METAL, CHIP 330K 5% 1/10W (2012)
R115	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R116	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R117	1-216-085-00	s METAL, CHIP 33K 5% 1/10W (2012)
R118	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R119	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R120	1-216-109-00	s METAL, CHIP 330K 5% 1/10W (2012)
R121	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R122	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R123	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R124	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R125	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R126	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R127	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R128	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R129	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R130	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R131	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R132	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R133	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R134	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R135	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R136	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R137	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R138	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R139	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R140	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R141	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R142	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R145	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R146	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R147	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R148	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R149	1-216-045-00	s METAL, CHIP 680 5% 1/10W (2012)
R150	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R151	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R152	1-216-295-00	s METAL, CHIP 0 (2012)

(SS-83 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R153	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R154	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R155	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R156	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R157	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R158	1-216-045-00	s METAL, CHIP 680 5% 1/10W (2012)
R159	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R164	1-216-295-00	s METAL, CHIP 0 (2012)
R300	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R301	1-216-295-00	s METAL, CHIP 0 (2012)
R302	1-216-295-00	s METAL, CHIP 0 (2012)
R303	1-216-001-00	s METAL, CHIP 10 5% 1/10W (2012)
R304	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R305	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R306	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R307	1-216-295-00	s METAL, CHIP 0 (2012)
R308	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R309	1-216-061-00	s METAL, CHIP 3.3K 5% 1/10W (2012)
R310	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R311	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R312	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R313	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R314	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R315	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R316	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R317	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R318	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R319	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R320	1-216-295-00	s METAL, CHIP 0 (2012)
R321	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R322	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R323	1-216-295-00	s METAL, CHIP 0 (2012)
R324	1-216-295-00	s METAL, CHIP 0 (2012)
R325	1-216-109-00	s METAL, CHIP 330K 5% 1/10W (2012)
R326	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R327	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R328	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R329	1-216-295-00	s METAL, CHIP 0 (2012)
R330	1-216-295-00	s METAL, CHIP 0 (2012)
R331	1-216-295-00	s METAL, CHIP 0 (2012)
R332	1-216-295-00	s METAL, CHIP 0 (2012)
R333	1-216-295-00	s METAL, CHIP 0 (2012)
R334	1-216-295-00	s METAL, CHIP 0 (2012)
R335	1-216-295-00	s METAL, CHIP 0 (2012)
R336	1-216-295-00	s METAL, CHIP 0 (2012)
R337	1-216-295-00	s METAL, CHIP 0 (2012)
R338	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R339	1-216-295-00	s METAL, CHIP 0 (2012)
R340	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R341	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R342	1-216-105-11	s METAL, CHIP 220K 5% 1/10W (2012)
R343	1-216-105-11	s METAL, CHIP 220K 5% 1/10W (2012)
R344	1-216-085-00	s METAL, CHIP 33K 5% 1/10W (2012)
R345	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R346	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R347	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R348	1-216-295-00	s METAL, CHIP 0 (2012)
R349	1-216-295-00	s METAL, CHIP 0 (2012)
R350	1-216-295-00	s METAL, CHIP 0 (2012)

(SS-83 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R351	1-216-295-00	s METAL, CHIP 0 (2012)
R352	1-216-295-00	s METAL, CHIP 0 (2012)
R353	1-216-295-00	s METAL, CHIP 0 (2012)
R354	1-216-295-00	s METAL, CHIP 0 (2012)
R355	1-216-295-00	s METAL, CHIP 0 (2012)
R356	1-216-295-00	s METAL, CHIP 0 (2012)
R357	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R358	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R359	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R360	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R361	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R362	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R364	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R368	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R369	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R370	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R371	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R372	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R373	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R374	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R376	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R377	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R378	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R379	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R380	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R381	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R384	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R385	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R386	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R389	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R407	1-216-295-00	s METAL, CHIP 0 (2012)
R408	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R409	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R411	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R412	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R413	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R414	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R415	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R500	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R504	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R506	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R507	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R700	1-216-295-00	s METAL, CHIP 0 (2012)
R703	1-216-295-00	s METAL, CHIP 0 (2012)
R705	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R707	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R708	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R709	1-216-295-00	s METAL, CHIP 0 (2012)
R710	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R715	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R716	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R717	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R721	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R726	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R727	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R728	1-216-673-11	s METAL, CHIP 8.2K 0.5% 1/10W (2012)
R729	1-216-295-00	s METAL, CHIP 0 (2012)
R730	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R737	1-216-295-00	s METAL, CHIP 0 (2012)

(SS-83 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R739	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R740	1-218-760-11	s METAL, CHIP 220K 0.5% 1/10W (2012)
R741	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R742	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R745	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R746	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R747	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R900	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R901	1-216-295-00	s METAL, CHIP 0 (2012)
R902	1-216-295-00	s METAL, CHIP 0 (2012)
R904	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R906	1-216-295-00	s METAL, CHIP 0 (2012)
R907	1-216-295-00	s METAL, CHIP 0 (2012)
R909	1-216-295-00	s METAL, CHIP 0 (2012)
R910	1-216-295-00	s METAL, CHIP 0 (2012)
R911	1-216-295-00	s METAL, CHIP 0 (2012)
R913	1-216-295-00	s METAL, CHIP 0 (2012)
R914	1-216-295-00	s METAL, CHIP 0 (2012)
R919	1-216-295-00	s METAL, CHIP 0 (2012)
R920	1-216-295-00	s METAL, CHIP 0 (2012)
R921	1-216-295-00	s METAL, CHIP 0 (2012)
R1100	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R1101	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R1102	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R1103	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1105	1-216-295-00	s METAL, CHIP 0 (2012)
R1106	1-216-295-00	s METAL, CHIP 0 (2012)
R1107	1-216-295-00	s METAL, CHIP 0 (2012)
R1108	1-216-295-00	s METAL, CHIP 0 (2012)
R1109	1-216-061-00	s METAL, CHIP 3.3K 5% 1/10W (2012)
R1110	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1111	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1112	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1113	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1114	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1115	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1116	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1117	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1118	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1119	1-216-077-00	s METAL, CHIP 15K 5% 1/10W (2012)
R1120	1-216-077-00	s METAL, CHIP 15K 5% 1/10W (2012)
R1121	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1122	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R1123	1-216-077-00	s METAL, CHIP 15K 5% 1/10W (2012)
R1124	1-216-077-00	s METAL, CHIP 15K 5% 1/10W (2012)
R1125	1-216-077-00	s METAL, CHIP 15K 5% 1/10W (2012)
R1126	1-216-077-00	s METAL, CHIP 15K 5% 1/10W (2012)
R1127	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R1128	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R1129	1-216-295-00	s METAL, CHIP 0 (2012)
R1130	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1131	1-216-295-00	s METAL, CHIP 0 (2012)
R1132	1-216-295-00	s METAL, CHIP 0 (2012)
R1133	1-216-295-00	s METAL, CHIP 0 (2012)
R1134	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1135	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1136	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1137	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R1138	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)

(SS-83 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB1900	1-239-306-11	s RES, NETWORK, CHIP 10Kx8 (6432)
RB1901	1-239-306-11	s RES, NETWORK, CHIP 10Kx8 (6432)
RB2100	1-239-306-11	s RES, NETWORK, CHIP 10Kx8 (6432)
RB2101	1-239-308-11	s RES, NETWORK, CHIP 47Kx8 (6432)
RB2102	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB2103	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB2104	1-239-308-11	s RES, NETWORK, CHIP 47Kx8 (6432)
RB2105	1-239-308-11	s RES, NETWORK, CHIP 47Kx8 (6432)
RB2106	1-239-308-11	s RES, NETWORK, CHIP 47Kx8 (6432)
RB2107	1-239-308-11	s RES, NETWORK, CHIP 47Kx8 (6432)
RB2108	1-239-308-11	s RES, NETWORK, CHIP 47Kx8 (6432)
RB2109	1-239-308-11	s RES, NETWORK, CHIP 47Kx8 (6432)
RB2110	1-239-308-11	s RES, NETWORK, CHIP 47Kx8 (6432)
RB2111	1-239-308-11	s RES, NETWORK, CHIP 47Kx8 (6432)
RV100	1-241-785-11	s RES, ADJ, CERMET 10K
S100	1-572-473-11	s SWITCH, PUSH
S101	1-692-270-41	s SWITCH, SLIDE
S700	1-572-474-11	s SWITCH, PUSH
S1100	1-692-271-31	s SWITCH, DIP 8-CKT
S1101	1-572-473-11	s SWITCH, PUSH
S1102	1-692-271-31	s SWITCH, DIP 8-CKT
S1900	1-692-271-31	s SWITCH, DIP 8-CKT
S2100	1-692-271-31	s SWITCH, DIP 8-CKT
X1100	1-760-464-11	s CRYSTAL 4.9152 MHz
X1500	1-760-528-11	s OSC, CRYSTAL 40 MHz
X2300	1-579-993-21	s CRYSTAL 13.50 MHz

SWC-31 BOARD

Ref. No. or Q'ty	Part No.	SP Description
lpc	A-8323-240-A	o MOUNTED CIRCUIT BOARD, SWC-31M
C101	1-126-795-11	s ELECT 10uF 20% 50V
C102	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C103	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C104	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C105	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C106	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C107	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C108	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C110	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C111	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C112	1-126-795-11	s ELECT 10uF 20% 50V
C113	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C114	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C115	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C116	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C117	1-126-795-11	s ELECT 10uF 20% 50V
C118	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C119	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C120	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C121	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C122	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C123	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C124	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C125	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C126	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C127	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C128	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C129	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C130	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C131	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C132	1-104-553-11	s FILM, CHIP 0.015uF 5% 16V (3216)
C133	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C134	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C135	1-104-553-11	s FILM, CHIP 0.015uF 5% 16V (3216)
C136	1-163-017-00	s CERAMIC, CHIP 4700pF 10% 50V (2012)
C137	1-163-017-00	s CERAMIC, CHIP 4700pF 10% 50V (2012)
C138	1-163-137-00	s CERAMIC, CHIP 680pF 5% 50V (2012)
C139	1-163-137-00	s CERAMIC, CHIP 680pF 5% 50V (2012)
CN31	1-560-781-00	o CONNECTOR, FLAT CABLE 34P, MALE
D101	8-719-024-81	s DIODE 1SS300
D102	8-719-024-81	s DIODE 1SS300
D103	8-719-024-81	s DIODE 1SS300
D104	8-719-024-81	s DIODE 1SS300
D105	8-719-024-81	s DIODE 1SS300
D106	8-719-024-81	s DIODE 1SS300
D107	8-719-024-81	s DIODE 1SS300
IC101	8-759-995-03	s IC LT1021DCS8-5
IC102	8-759-009-07	s IC MC14053BF
IC103	8-759-009-07	s IC MC14053BF
IC104	8-759-009-07	s IC MC14053BF
IC105	8-759-175-74	s IC M62301FP
IC106	8-759-175-74	s IC M62301FP
Q101	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q102	8-729-028-91	s TRANSISTOR DTA144EUA
Q103	8-729-028-91	s TRANSISTOR DTA144EUA

(SWC-31 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R101	1-216-295-00	s METAL, CHIP 0 (2012)
R102	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R103	1-218-780-11	s METAL, CHIP 270 5% 1/4W (3225)
R104	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R105	1-216-295-00	s METAL, CHIP 0 (2012)
R106	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R107	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R108	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R109	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R110	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R111	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R112	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R113	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R114	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
RB101	1-239-306-11	s RES, NETWORK, CHIP 10Kx8 (6432)
RV101	1-237-696-11	s RES, VAR, CARBON 5K
RV102	1-237-696-11	s RES, VAR, CARBON 5K
RV103	1-237-696-11	s RES, VAR, CARBON 5K
RV104	1-237-696-11	s RES, VAR, CARBON 5K
RV105	1-237-695-11	s RES, VAR, CARBON 5K
RV106	1-237-695-11	s RES, VAR, CARBON 5K
RV107	1-237-695-11	s RES, VAR, CARBON 5K
S101	1-570-157-51	s SWITCH, SLIDE
S102	1-570-157-51	s SWITCH, SLIDE
S103	1-570-157-51	s SWITCH, SLIDE
S104	1-570-157-51	s SWITCH, SLIDE
S105	1-572-374-11	s SWITCH, SLIDE
S106	1-570-157-51	s SWITCH, SLIDE
S108	1-572-374-11	s SWITCH, SLIDE
S109	1-570-157-51	s SWITCH, SLIDE
S110	1-570-157-51	s SWITCH, SLIDE
S112	1-570-157-51	s SWITCH, SLIDE
S113	1-570-157-51	s SWITCH, SLIDE

SWC-35 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8319-293-A	o MOUNTED CIRCUIT BOARD, SWC-35
19pcs	3-668-124-03	s HOLDER, LED
1pc	4-937-336-11	s HOLDER, LED
C101	1-126-795-11	s ELECT 10uF 20% 50V
C102	1-126-795-11	s ELECT 10uF 20% 50V
C103	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C104	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C105	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
CN30	1-751-360-11	s CABLE, FLAT 26P (FRONT SW2)
D101	8-719-024-81	s DIODE 1SS300
D102	8-719-024-81	s DIODE 1SS300
D103	8-719-024-81	s DIODE 1SS300
D104	8-719-024-81	s DIODE 1SS300
D105	8-719-024-81	s DIODE 1SS300
D106	8-719-024-81	s DIODE 1SS300
D107	8-719-024-81	s DIODE 1SS300
D108	8-719-024-81	s DIODE 1SS300
D109	8-719-024-81	s DIODE 1SS300
D110	8-719-041-85	s LED TLY255A, YEL
D111	8-719-041-85	s LED TLY255A, YEL
D112	8-719-041-85	s LED TLY255A, YEL
D113	8-719-041-85	s LED TLY255A, YEL
D114	8-719-041-85	s LED TLY255A, YEL
D115	8-719-041-85	s LED TLY255A, YEL
D116	8-719-041-85	s LED TLY255A, YEL
D117	8-719-041-85	s LED TLY255A, YEL
D118	8-719-041-85	s LED TLY255A, YEL
D119	8-719-041-85	s LED TLY255A, YEL
D120	8-719-041-85	s LED TLY255A, YEL
D121	8-719-041-85	s LED TLY255A, YEL
D122	8-719-041-85	s LED TLY255A, YEL
D123	8-719-041-85	s LED TLY255A, YEL
D124	8-719-041-85	s LED TLY255A, YEL
D125	8-719-041-85	s LED TLY255A, YEL
D126	8-719-041-85	s LED TLY255A, YEL
D127	8-719-041-85	s LED TLY255A, YEL
D128	8-719-041-85	s LED TLY255A, YEL
D130	8-719-024-81	s DIODE 1SS300
D131	8-719-024-81	s DIODE 1SS300
D132	8-719-041-85	s LED TLY255A, YEL
IC101	8-759-245-40	s IC TD62003P
Q101	8-729-027-29	s TRANSISTOR DTA123JKA
Q102	8-729-027-29	s TRANSISTOR DTA123JKA
Q103	8-729-027-29	s TRANSISTOR DTA123JKA
Q104	8-729-027-29	s TRANSISTOR DTA123JKA
Q105	8-729-027-29	s TRANSISTOR DTA123JKA
Q106	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q107	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q108	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q109	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q110	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q111	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q112	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q113	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q114	8-729-029-04	s TRANSISTOR DTC123JUA
Q115	8-729-029-04	s TRANSISTOR DTC123JUA

(SWC-35 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q116	8-729-029-04	s TRANSISTOR DTC123JUA
Q117	8-729-029-04	s TRANSISTOR DTC123JUA
Q118	8-729-029-04	s TRANSISTOR DTC123JUA
Q119	8-729-029-04	s TRANSISTOR DTC123JUA
Q120	8-729-029-04	s TRANSISTOR DTC123JUA
Q121	8-729-029-04	s TRANSISTOR DTC123JUA
R101	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R102	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R103	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R104	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R105	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R106	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R107	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R108	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R109	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R110	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R111	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R112	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R113	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R114	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R115	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R116	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R117	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R118	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R119	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R120	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R121	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R122	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R123	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R124	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R125	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R126	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R127	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R128	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R129	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R130	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R131	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R133	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R134	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R135	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R136	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R137	1-220-254-11	s METAL, CHIP 56 5% 1/4W (3225)
R201	1-216-029-00	s METAL, CHIP 150 5% 1/10W (2012)
R202	1-216-029-00	s METAL, CHIP 150 5% 1/10W (2012)
R203	1-216-029-00	s METAL, CHIP 150 5% 1/10W (2012)
R204	1-216-029-00	s METAL, CHIP 150 5% 1/10W (2012)
R205	1-216-029-00	s METAL, CHIP 150 5% 1/10W (2012)
R206	1-216-029-00	s METAL, CHIP 150 5% 1/10W (2012)
R207	1-216-029-00	s METAL, CHIP 150 5% 1/10W (2012)
R208	1-216-029-00	s METAL, CHIP 150 5% 1/10W (2012)
R217	1-216-029-00	s METAL, CHIP 150 5% 1/10W (2012)
R221	1-216-029-00	s METAL, CHIP 150 5% 1/10W (2012)
R222	1-216-029-00	s METAL, CHIP 150 5% 1/10W (2012)
R223	1-216-029-00	s METAL, CHIP 150 5% 1/10W (2012)
R224	1-216-029-00	s METAL, CHIP 150 5% 1/10W (2012)
R225	1-216-029-00	s METAL, CHIP 150 5% 1/10W (2012)
RB101	1-239-306-11	s RES, NETWORK, CHIP 10Kx8 (6432)
RB102	1-239-305-11	s RES, NETWORK, CHIP 4.7Kx8 (6432)

(SWC-35 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
S201	1-692-537-11	s SWITCH, PUSH (WITH LED)
S202	1-692-537-11	s SWITCH, PUSH (WITH LED)
S203	1-692-537-11	s SWITCH, PUSH (WITH LED)
S204	1-692-537-11	s SWITCH, PUSH (WITH LED)
S205	1-692-537-11	s SWITCH, PUSH (WITH LED)
S206	1-692-537-11	s SWITCH, PUSH (WITH LED)
S207	1-692-537-11	s SWITCH, PUSH (WITH LED)
S208	1-692-537-11	s SWITCH, PUSH (WITH LED)
S209	1-692-016-11	s SWITCH, PUSH
S210	1-692-016-11	s SWITCH, PUSH
S211	1-692-016-11	s SWITCH, PUSH
S212	1-692-016-11	s SWITCH, PUSH
S213	1-692-016-11	s SWITCH, PUSH
S214	1-692-016-11	s SWITCH, PUSH
S215	1-692-016-11	s SWITCH, PUSH
S216	1-692-016-11	s SWITCH, PUSH
S217	1-692-537-11	s SWITCH, PUSH (WITH LED)
S221	1-692-537-11	s SWITCH, PUSH (WITH LED)
S222	1-692-537-11	s SWITCH, PUSH (WITH LED)
S223	1-692-537-11	s SWITCH, PUSH (WITH LED)
S224	1-692-537-11	s SWITCH, PUSH (WITH LED)
S225	1-692-537-11	s SWITCH, PUSH (WITH LED)

TC-102 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8319-299-A	o MOUNTED CIRCUIT BOARD, TC-102
1pc	3-697-416-01	o BRACKET, TC-96
1pc	7-685-871-01	s SCREW +BVT 3x6 (S)
C100	1-107-906-11	s ELECT 10uF 20% 50V
C101	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V (2012)
C102	1-128-526-11	s ELECT 100uF 20% 16V
C103	1-104-551-11	s FILM, CHIP 0.01uF 5% 16V (2012)
C104	1-107-906-11	s ELECT 10uF 20% 50V
C105	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C106	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V (2012)
C107	1-107-906-11	s ELECT 10uF 20% 50V
C200	1-104-912-11	s TANTALUM, CHIP 3.3uF 20% 16V (3216)
C201	1-128-526-11	s ELECT 100uF 20% 16V
C202	1-128-526-11	s ELECT 100uF 20% 16V
C203	1-163-017-00	s CERAMIC, CHIP 4700pF 10% 50V (2012)
C204	1-163-017-00	s CERAMIC, CHIP 4700pF 10% 50V (2012)
C205	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C206	1-164-182-11	s CERAMIC, CHIP 0.033uF 10% 50V(2012)
C207	1-136-562-11	s FILM 0.0082uF 5% 630V
C300	1-164-492-11	s CERAMIC, CHIP 0.15uF 10% 16V (2012)
C301	1-163-017-00	s CERAMIC, CHIP 4700pF 10% 50V (2012)
C302	1-163-017-00	s CERAMIC, CHIP 4700pF 10% 50V (2012)
C303	1-107-901-11	s ELECT 0.47uF 20% 50V
C304	1-136-562-11	s FILM 0.0082uF 5% 630V
C305	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C400	1-107-906-11	s ELECT 10uF 20% 50V
C401	1-107-906-11	s ELECT 10uF 20% 50V
C402	1-107-906-11	s ELECT 10uF 20% 50V
C403	1-107-906-11	s ELECT 10uF 20% 50V
C404	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C405	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C406	1-107-888-11	s ELECT 47uF 20% 25V
C407	1-107-888-11	s ELECT 47uF 20% 25V
C408	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C409	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C410	1-107-906-11	s ELECT 10uF 20% 50V
C411	1-107-906-11	s ELECT 10uF 20% 50V
C412	1-107-906-11	s ELECT 10uF 20% 50V
C413	1-107-906-11	s ELECT 10uF 20% 50V
C450	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C451	1-107-906-11	s ELECT 10uF 20% 50V
CN1	1-506-472-11	s CONNECTOR, 7P, MALE
CN25	1-506-473-11	s CONNECTOR, 8P, MALE
CN100	1-564-002-11	s CONNECTOR, 3P, MALE
CN140	1-580-541-11	s CONNECTOR, LY 24P, MALE
CN200	1-506-468-11	s CONNECTOR, 3P, MALE
CN300	1-506-468-11	s CONNECTOR, 3P, MALE
D100	8-719-941-23	s DIODE DA204U
D101	8-719-404-35	s DIODE MA141WK
D102	8-719-404-35	s DIODE MA141WK
D103	8-719-404-35	s DIODE MA141WK
D300	8-719-024-81	s DIODE 1SS300
D400	8-719-941-04	s DIODE SB007-03CP
FB100	1-543-622-11	s BEAD, FERRITE, CHIP
FB101	1-543-622-11	s BEAD, FERRITE, CHIP
FB102	1-543-622-11	s BEAD, FERRITE, CHIP
FB200	1-543-622-11	s BEAD, FERRITE, CHIP

(TC-102 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
FB201	1-543-622-11	s BEAD, FERRITE, CHIP
FB202	1-543-622-11	s BEAD, FERRITE, CHIP
FB300	1-543-622-11	s BEAD, FERRITE, CHIP
FB301	1-543-622-11	s BEAD, FERRITE, CHIP
FB302	1-543-622-11	s BEAD, FERRITE, CHIP
IC100	8-759-710-77	s IC NJM4560MD
IC101	8-759-637-09	s IC M5238FP-722
IC102	8-759-981-48	s IC TL082M
IC103	8-759-925-72	s IC SN74HC02ANS
IC104	8-759-700-07	s IC NJM2903M
IC300	8-759-925-76	s IC SN74HC08ANS
IC301	8-759-926-23	s IC SN74HC163ANS
IC302	8-759-926-23	s IC SN74HC163ANS
IC303	8-759-239-34	s IC TC74HC4538AF
IC304	8-759-925-76	s IC SN74HC08ANS
IC400	8-759-234-08	s IC TA78L05F
IC401	8-759-446-74	s IC TA79L05F
IC450	8-759-637-09	s IC M5238FP-722
L200	1-412-533-21	s INDUCTOR 47uH
L300	1-412-533-21	s INDUCTOR 47uH
L400	1-412-533-21	s INDUCTOR 47uH
L401	1-412-533-21	s INDUCTOR 47uH
L402	1-412-533-21	s INDUCTOR 47uH
LV300	1-414-007-11	s COIL, VAR 1.5uH
PS200	△ 1-533-724-11	s FUSE, CHIP 0.4A 125V
PS300	△ 1-533-724-11	s FUSE, CHIP 0.4A 125V
Q100	8-729-209-07	s TRANSISTOR 2SC4213-B
Q101	8-729-029-14	s TRANSISTOR DTC144EUA
Q102	8-729-028-91	s TRANSISTOR DTA144EUA
Q103	8-729-209-07	s TRANSISTOR 2SC4213-B
Q104	8-729-109-44	s TRANSISTOR 2SK94
Q105	8-729-028-91	s TRANSISTOR DTA144EUA
Q106	8-729-109-44	s TRANSISTOR 2SK94
Q107	8-729-109-44	s TRANSISTOR 2SK94
Q108	8-729-209-07	s TRANSISTOR 2SC4213-B
Q109	8-729-028-91	s TRANSISTOR DTA144EUA
Q110	8-729-028-91	s TRANSISTOR DTA144EUA
Q200	8-729-029-14	s TRANSISTOR DTC144EUA
Q201	8-729-029-14	s TRANSISTOR DTC144EUA
Q202	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q203	8-729-117-11	s TRANSISTOR 2SB1151-L
Q204	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q205	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q206	8-729-141-75	s TRANSISTOR 2SD596DV345
Q207	8-729-141-75	s TRANSISTOR 2SD596DV345
Q208	8-729-209-07	s TRANSISTOR 2SC4213-B
Q209	8-729-209-07	s TRANSISTOR 2SC4213-B
Q301	8-729-029-14	s TRANSISTOR DTC144EUA
Q302	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q303	8-729-117-11	s TRANSISTOR 2SB1151-L
Q304	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q305	8-729-140-98	s TRANSISTOR 2SD773-34
Q306	8-729-140-98	s TRANSISTOR 2SD773-34
R101	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R102	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R103	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R104	1-216-657-11	s METAL, CHIP 1.8K 0.5% 1/10W (2012)

(TC-102 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R105	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R106	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R107	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R108	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R109	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R110	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R111	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R113	1-216-684-11	s METAL, CHIP 24K 0.5% 1/10W (2012)
R114	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R115	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R116	1-216-649-11	s METAL, CHIP 820 0.5% 1/10W (2012)
R117	1-218-760-11	s METAL, CHIP 220K 0.5% 1/10W (2012)
R118	1-216-691-11	s METAL, CHIP 47K 0.5% 1/10W (2012)
R119	1-218-760-11	s METAL, CHIP 220K 0.5% 1/10W (2012)
R120	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R121	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R122	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R123	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R124	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R125	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R126	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R127	1-216-691-11	s METAL, CHIP 47K 0.5% 1/10W (2012)
R128	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R129	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R130	1-216-655-11	s METAL, CHIP 1.5K 0.5% 1/10W (2012)
R131	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R132	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R133	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R134	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R135	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R136	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R137	1-216-677-11	s METAL, CHIP 12K 0.5% 1/10W (2012)
R138	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R139	1-218-776-11	s METAL, CHIP 1.0M 0.5% 1/10W (2012)
R140	1-216-669-11	s METAL, CHIP 5.6K 0.5% 1/10W (2012)
R141	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R142	1-216-691-11	s METAL, CHIP 47K 0.5% 1/10W (2012)
R143	1-216-691-11	s METAL, CHIP 47K 0.5% 1/10W (2012)
R144	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R200	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R201	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R203	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R204	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R205	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)
R206	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R207	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R208	1-216-695-11	s METAL, CHIP 68K 0.5% 1/10W (2012)
R209	1-216-695-11	s METAL, CHIP 68K 0.5% 1/10W (2012)
R210	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R211	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R212	1-218-236-11	s METAL, CHIP 1.0 10% 1/4W (3225)
R300	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R301	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R302	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R303	1-216-693-11	s METAL, CHIP 56K 0.5% 1/10W (2012)
R304	1-216-671-11	s METAL, CHIP 6.8K 0.5% 1/10W (2012)
R305	1-216-645-11	s METAL, CHIP 560 0.5% 1/10W (2012)
R306	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R307	1-216-683-11	s METAL, CHIP 22K 0.5% 1/10W (2012)

(TC-102 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R308	1-216-637-11	s METAL, CHIP 270 0.5% 1/10W (2012)
R309	1-216-637-11	s METAL, CHIP 270 0.5% 1/10W (2012)
R310	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W (2012)
R311	1-216-638-11	s METAL, CHIP 300 0.5% 1/10W (2012)
R312	1-220-248-11	s METAL, CHIP 6.8 10% 1/2W (4532)
R313	1-220-248-11	s METAL, CHIP 6.8 10% 1/2W (4532)
R314	1-220-248-11	s METAL, CHIP 6.8 10% 1/2W (4532)
R315	1-220-248-11	s METAL, CHIP 6.8 10% 1/2W (4532)
R316	1-218-236-11	s METAL, CHIP 1.0 10% 1/4W (3225)
R317	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R318	1-216-695-11	s METAL, CHIP 68K 0.5% 1/10W (2012)
R319	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R320	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R321	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R322	1-216-627-11	s METAL, CHIP 100 0.5% 1/10W (2012)
R450	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R451	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R452	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R453	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R454	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
T200	1-424-511-11	s TRANSFORMER, FE
T300	1-424-511-11	s TRANSFORMER, FE



TR-78 BOARD

Ref. No.
or Q'ty Part No. SP Description

The components on this board are out of spare parts.
When component replacement is required, replace by the
assembly (including mounted circuit board) below.

A-8267-795-E s TENSION REGULATOR ASSY (RP)

TR-79 BOARD

Ref. No.
or Q'ty Part No. SP Description

lpc A-8276-628-A o MOUNTED CIRCUIT BOARD, TR-79
lpc 3-180-861-01 o HOLDER, DME

CN1 1-506-473-11 s CONNECTOR, 8P, MALE

CP1 8-745-001-07 s DME DM-230-1

PH1 8-719-939-05 s PHOTO-INTERRUPTER GP-1S54
PH2 8-719-939-05 s PHOTO-INTERRUPTER GP-1S54

R1 1-249-409-11 s CARBON 220 5% 1/4W
R2 1-249-409-11 s CARBON 220 5% 1/4W

VPR-47 BOARD for DNW-75

Ref. No.
or Q'ty Part No. SP Description

lpc A-8319-301-A o MOUNTED CIRCUIT BOARD, VPR-47
lpc 3-179-084-01 s LEVER (R), PC BOARD
lpc 3-179-085-01 s LEVER (L), PC BOARD

C100 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C101 1-126-394-11 s ELECT, CHIP 10uF 20% 16V
C103 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C114 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C121 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

C123 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C125 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C127 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C129 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C130 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

C131 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C132 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C133 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C134 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C135 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

C136 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C137 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C138 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C139 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C140 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

C141 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C142 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C143 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C144 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C145 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

C146 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C147 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C148 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C149 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C150 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

C151 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C152 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C153 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C154 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C180 1-126-394-11 s ELECT, CHIP 10uF 20% 16V

C181 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C182 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C190 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C300 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C301 1-126-394-11 s ELECT, CHIP 10uF 20% 16V

C302 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C303 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C304 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C305 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C306 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

C307 1-128-397-21 s ELECT 100uF 20% 16V
C308 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C309 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C313 1-128-394-11 s ELECT 220uF 20% 10V
C314 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

C315 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C316 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C317 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C318 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)
C319 1-163-038-00 s CERAMIC, CHIP 0.1uF 25V (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
C320	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C321	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C325	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C326	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C327	1-128-393-11	s ELECT 100uF 20% 10V
C328	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C329	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C330	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C331	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C332	1-128-393-11	s ELECT 100uF 20% 10V
C333	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C334	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C335	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C336	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C337	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C338	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C339	1-128-397-21	s ELECT 100uF 20% 16V
C340	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C341	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C342	1-107-854-11	s TANTALUM, CHIP 68uF 20% 6.3V (5833)
C343	1-107-854-11	s TANTALUM, CHIP 68uF 20% 6.3V (5833)
C344	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C345	1-128-393-11	s ELECT 100uF 20% 10V
C346	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C347	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C348	1-128-393-11	s ELECT 100uF 20% 10V
C349	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C350	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C351	1-128-394-11	s ELECT 220uF 20% 10V
C352	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C354	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C356	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C357	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C358	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C359	1-113-987-11	s TANTALUM, CHIP 4.7uF 20% 25V (5833)
C360	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C361	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C364	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C370	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C371	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C372	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C373	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C374	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C375	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C376	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C377	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C378	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C379	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C380	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C381	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C382	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C383	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C384	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C385	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C386	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C387	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C388	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C389	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C390	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
C391	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C392	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C393	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C394	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C395	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C396	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C397	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C398	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C399	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C400	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C401	1-128-393-11	s ELECT 100uF 20% 10V
C402	1-127-516-11	s ALUMN SOLID 220uF 20% 10V
C403	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C405	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C406	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C407	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C408	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C409	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C410	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C411	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C412	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C413	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C414	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C415	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C416	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C417	1-128-393-11	s ELECT 100uF 20% 10V
C418	1-128-393-11	s ELECT 100uF 20% 10V
C419	1-127-516-11	s ALUMN SOLID 220uF 20% 10V
C420	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C421	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C422	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C423	1-127-516-11	s ALUMN SOLID 220uF 20% 10V
C424	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C425	1-163-092-00	s CERAMIC, CHIP 9pF 50V (2012)
C426	1-163-145-00	s CERAMIC, CHIP 1500pF 5% 50V (2012)
C427	1-163-145-00	s CERAMIC, CHIP 1500pF 5% 50V (2012)
C428	1-163-145-00	s CERAMIC, CHIP 1500pF 5% 50V (2012)
C429	1-163-257-11	s CERAMIC, CHIP 180pF 5% 50V (2012)
C430	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C431	1-163-087-00	s CERAMIC, CHIP 4pF 50V (2012)
C432	1-163-220-11	s CERAMIC, CHIP 3pF 50V (2012)
C433	1-163-220-11	s CERAMIC, CHIP 3pF 50V (2012)
C434	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C435	1-135-210-11	s TANTALUM, CHIP 4.7uF 20% 10V (3216)
C436	1-135-210-11	s TANTALUM, CHIP 4.7uF 20% 10V (3216)
C437	1-135-210-11	s TANTALUM, CHIP 4.7uF 20% 10V (3216)
C438	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C439	1-135-210-11	s TANTALUM, CHIP 4.7uF 20% 10V (3216)
C440	1-135-210-11	s TANTALUM, CHIP 4.7uF 20% 10V (3216)
C441	1-135-210-11	s TANTALUM, CHIP 4.7uF 20% 10V (3216)
C442	1-135-091-00	s TANTALUM, CHIP 1.0uF 20% 16V (3216)
C443	1-135-091-00	s TANTALUM, CHIP 1.0uF 20% 16V (3216)
C444	1-135-091-00	s TANTALUM, CHIP 1.0uF 20% 16V (3216)
C445	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C446	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C447	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C448	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C449	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C450	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP	Description
C451	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C452	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C453	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C454	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C455	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C456	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C457	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C458	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C462	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C463	1-128-397-21	s	ELECT 100uF 20% 16V
C464	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C465	1-128-397-21	s	ELECT 100uF 20% 16V
C466	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C470	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C471	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C472	1-163-243-11	s	CERAMIC, CHIP 47pF 5% 50V (2012)
C500	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C501	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C502	1-128-393-11	s	ELECT 100uF 20% 10V
C503	1-128-393-11	s	ELECT 100uF 20% 10V
C504	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C505	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C506	1-128-393-11	s	ELECT 100uF 20% 10V
C507	1-128-393-11	s	ELECT 100uF 20% 10V
C508	1-128-393-11	s	ELECT 100uF 20% 10V
C509	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C510	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C511	1-128-393-11	s	ELECT 100uF 20% 10V
C512	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C513	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C514	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C515	1-163-239-11	s	CERAMIC, CHIP 33pF 5% 50V (2012)
C516	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C517	1-163-259-11	s	CERAMIC, CHIP 220pF 5% 50V (2012)
C518	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C519	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C520	1-104-547-11	s	FILM, CHIP 0.0047uF 5% 16V (2012)
C521	1-163-021-11	s	CERAMIC, CHIP 0.01uF 10% 50V (2012)
C522	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C523	1-163-133-00	s	CERAMIC, CHIP 470pF 5% 50V (2012)
C524	1-163-259-11	s	CERAMIC, CHIP 220pF 5% 50V (2012)
C525	1-104-547-11	s	FILM, CHIP 0.0047uF 5% 16V (2012)
C526	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C527	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C528	1-163-259-11	s	CERAMIC, CHIP 220pF 5% 50V (2012)
C529	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C530	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C531	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C532	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C533	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C534	1-163-021-11	s	CERAMIC, CHIP 0.01uF 10% 50V (2012)
C535	1-128-393-11	s	ELECT 100uF 20% 10V
C536	1-135-085-21	s	TANTALUM, CHIP 4.7uF 10% 25V (5833)
C537	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C538	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C539	1-135-085-21	s	TANTALUM, CHIP 4.7uF 10% 25V (5833)
C540	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C541	1-104-559-11	s	FILM, CHIP 0.047uF 5% 16V (3216)
C542	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP	Description
C543	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C544	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C545	1-128-393-11	s	ELECT 100uF 20% 10V
C546	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C547	1-163-133-00	s	CERAMIC, CHIP 470pF 5% 50V (2012)
C550	1-163-089-00	s	CERAMIC, CHIP 6pF 50V (2012)
C551	1-163-085-00	s	CERAMIC, CHIP 2pF 50V (2012)
C553	1-163-239-11	s	CERAMIC, CHIP 33pF 5% 50V (2012)
C554	1-163-239-11	s	CERAMIC, CHIP 33pF 5% 50V (2012)
C555	1-128-393-11	s	ELECT 100uF 20% 10V
C556	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C557	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C558	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C559	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C560	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C561	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C562	1-128-393-11	s	ELECT 100uF 20% 10V
C563	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C564	1-128-393-11	s	ELECT 100uF 20% 10V
C565	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C566	1-128-393-11	s	ELECT 100uF 20% 10V
C567	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C568	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C569	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C570	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C571	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C572	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C573	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C574	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V (2012)
C575	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C576	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C577	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C578	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V (2012)
C579	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C580	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C581	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C582	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C583	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C584	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C585	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C586	1-163-137-00	s	CERAMIC, CHIP 680pF 5% 50V (2012)
C587	1-163-137-00	s	CERAMIC, CHIP 680pF 5% 50V (2012)
C589	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C590	1-113-987-11	s	TANTALUM, CHIP 4.7uF 20% 25V (5833)
C591	1-113-987-11	s	TANTALUM, CHIP 4.7uF 20% 25V (5833)
C593	1-128-393-11	s	ELECT 100uF 20% 10V
C594	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C595	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C600	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C601	1-128-393-11	s	ELECT 100uF 20% 10V
C680	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C690	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C691	1-128-393-11	s	ELECT 100uF 20% 10V
C692	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C693	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C694	1-128-393-11	s	ELECT 100uF 20% 10V
C695	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C696	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C697	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
C698	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C699	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C700	1-128-393-11	s ELECT 100uF 20% 10V
C701	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C702	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C703	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C704	1-128-393-11	s ELECT 100uF 20% 10V
C705	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C706	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C707	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C708	1-128-397-21	s ELECT 100uF 20% 16V
C709	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C710	1-128-397-21	s ELECT 100uF 20% 16V
C711	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C712	1-135-179-21	s TANTALUM, CHIP 2.2uF 10% 16V (3216)
C713	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C714	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C715	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V (2012)
C716	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C717	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V (2012)
C719	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C720	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C721	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C722	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C723	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C724	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C725	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C726	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C727	1-163-009-11	s CERAMIC, CHIP 1000pF 10% 50V (2012)
C728	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C729	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C730	1-128-397-21	s ELECT 100uF 20% 16V
C731	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C732	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C733	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V (2012)
C734	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C735	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C736	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V (2012)
C737	1-128-397-21	s ELECT 100uF 20% 16V
C738	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C739	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C740	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C741	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C742	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C743	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C744	1-128-393-11	s ELECT 100uF 20% 10V
C745	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C746	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C747	1-163-137-00	s CERAMIC, CHIP 680pF 5% 50V (2012)
C748	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C749	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C750	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C751	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C752	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C753	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C754	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C755	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C756	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C757	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
C758	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C759	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C760	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C761	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C762	1-111-253-11	s TANTALUM, CHIP 100uF 20% 6.3V(6032)
C763	1-111-253-11	s TANTALUM, CHIP 100uF 20% 6.3V(6032)
C764	1-111-253-11	s TANTALUM, CHIP 100uF 20% 6.3V(6032)
C765	1-111-253-11	s TANTALUM, CHIP 100uF 20% 6.3V(6032)
C766	1-104-852-11	s TANTALUM, CHIP 22uF 20% 10V (3528)
C767	1-104-852-11	s TANTALUM, CHIP 22uF 20% 10V (3528)
C768	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C769	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C770	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C771	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C772	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C773	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C774	1-104-852-11	s TANTALUM, CHIP 22uF 20% 10V (3528)
C775	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C776	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C777	1-128-397-21	s ELECT 100uF 20% 16V
C778	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C779	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C780	1-128-393-11	s ELECT 100uF 20% 10V
C781	1-128-393-11	s ELECT 100uF 20% 10V
C782	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C783	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C784	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C785	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C786	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C787	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C788	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C789	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C790	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C791	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C792	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C793	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C794	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C795	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C796	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C797	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C798	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C799	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C800	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C801	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C802	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C803	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C804	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C805	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C806	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C807	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C808	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C809	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C810	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C811	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C812	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C813	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C814	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C815	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C816	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP	Description
C817	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C818	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C819	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C820	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V (2012)
C821	1-163-021-11	s	CERAMIC, CHIP 0.01uF 10% 50V (2012)
C822	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V (2012)
C823	1-163-235-11	s	CERAMIC, CHIP 22pF 5% 50V (2012)
C824	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C825	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C826	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C827	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C890	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C891	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C892	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C893	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C900	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C901	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C902	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C903	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C908	1-128-397-21	s	ELECT 100uF 20% 16V
C909	1-128-394-11	s	ELECT 220uF 20% 10V
C910	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C911	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C912	1-128-394-11	s	ELECT 220uF 20% 10V
C913	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C914	1-128-394-11	s	ELECT 220uF 20% 10V
C915	1-128-394-11	s	ELECT 220uF 20% 10V
C919	1-163-259-11	s	CERAMIC, CHIP 220pF 5% 50V (2012)
C920	1-128-394-11	s	ELECT 220uF 20% 10V
C921	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C922	1-128-394-11	s	ELECT 220uF 20% 10V
C923	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C924	1-128-394-11	s	ELECT 220uF 20% 10V
C925	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C926	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C927	1-128-397-21	s	ELECT 100uF 20% 16V
C928	1-128-397-21	s	ELECT 100uF 20% 16V
C929	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C930	1-128-397-21	s	ELECT 100uF 20% 16V
C931	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1000	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1001	1-127-516-11	s	ALUMN SOLID 220uF 20% 10V
C1002	1-128-393-11	s	ELECT 100uF 20% 10V
C1003	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1004	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1017	1-128-393-11	s	ELECT 100uF 20% 10V
C1018	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1019	1-127-516-11	s	ALUMN SOLID 220uF 20% 10V
C1020	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1021	1-128-393-11	s	ELECT 100uF 20% 10V
C1022	1-163-037-11	s	CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1023	1-127-516-11	s	ALUMN SOLID 220uF 20% 10V
C1024	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1025	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1026	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C1027	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1028	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1029	1-135-259-11	s	TANTALUM, CHIP 10uF 20% 6.3V (3216)
C1030	1-135-259-11	s	TANTALUM, CHIP 10uF 20% 6.3V (3216)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP	Description
C1031	1-163-127-00	s	CERAMIC, CHIP 270pF 5% 50V (2012)
C1032	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C1033	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1034	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1035	1-163-092-00	s	CERAMIC, CHIP 9pF 50V (2012)
C1036	1-163-092-00	s	CERAMIC, CHIP 9pF 50V (2012)
C1037	1-163-145-00	s	CERAMIC, CHIP 1500pF 5% 50V (2012)
C1038	1-163-257-11	s	CERAMIC, CHIP 180pF 5% 50V (2012)
C1039	1-163-145-00	s	CERAMIC, CHIP 1500pF 5% 50V (2012)
C1040	1-163-257-11	s	CERAMIC, CHIP 180pF 5% 50V (2012)
C1041	1-163-220-11	s	CERAMIC, CHIP 3pF 50V (2012)
C1042	1-163-220-11	s	CERAMIC, CHIP 3pF 50V (2012)
C1043	1-135-210-11	s	TANTALUM, CHIP 4.7uF 20% 10V (3216)
C1044	1-135-210-11	s	TANTALUM, CHIP 4.7uF 20% 10V (3216)
C1045	1-135-210-11	s	TANTALUM, CHIP 4.7uF 20% 10V (3216)
C1046	1-135-210-11	s	TANTALUM, CHIP 4.7uF 20% 10V (3216)
C1047	1-135-091-00	s	TANTALUM, CHIP 1.0uF 20% 16V (3216)
C1048	1-135-091-00	s	TANTALUM, CHIP 1.0uF 20% 16V (3216)
C1057	1-163-222-11	s	CERAMIC, CHIP 5pF 50V (2012)
C1058	1-163-243-11	s	CERAMIC, CHIP 47pF 5% 50V (2012)
C1059	1-163-094-00	s	CERAMIC, CHIP 11pF 5% 50V (2012)
C1060	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1061	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C1062	1-163-227-11	s	CERAMIC, CHIP 10pF 5% 50V (2012)
C1064	1-163-227-11	s	CERAMIC, CHIP 10pF 5% 50V (2012)
C1065	1-163-229-11	s	CERAMIC, CHIP 12pF 5% 50V (2012)
CN113	1-778-261-12	o	CONNECTOR, B-B 124P, MALE
CN114	1-778-261-12	o	CONNECTOR, B-B 124P, MALE
CN115	1-778-262-12	o	CONNECTOR, B-B 148P, MALE
CP300	1-760-263-11	s	VCO, CRYSTAL 35.468950 MHz
CP301	1-760-277-11	s	VCO, CRYSTAL 28.636360 MHz
CP500	1-760-268-11	s	VCO, CRYSTAL 17.734475 MHz
CP501	1-760-267-11	s	VCO, CRYSTAL 14.318180 MHz
CP700	1-767-589-11	s	OSC, LITHIUM TANTALATE 24.576 MHz
CP701	1-760-275-11	s	VCO, CRYSTAL 27.0 MHz
D300	8-719-941-23	s	DIODE DA204U
D301	8-719-941-23	s	DIODE DA204U
D302	8-719-023-69	s	DIODE SB007T03Q
D400	8-719-023-69	s	DIODE SB007T03Q
D401	8-719-023-69	s	DIODE SB007T03Q
D402	8-719-023-69	s	DIODE SB007T03Q
D500	8-719-023-69	s	DIODE SB007T03Q
D501	8-719-023-69	s	DIODE SB007T03Q
D503	8-719-941-23	s	DIODE DA204U
D505	8-719-941-23	s	DIODE DA204U
D506	8-719-941-23	s	DIODE DA204U
D700	8-719-941-23	s	DIODE DA204U
D701	8-719-941-23	s	DIODE DA204U
D702	8-719-941-23	s	DIODE DA204U
D703	8-719-023-69	s	DIODE SB007T03Q
FB300	1-543-309-21	s	BEAD, FERRITE
FB301	1-543-309-21	s	BEAD, FERRITE
FB500	1-543-309-21	s	BEAD, FERRITE
FB501	1-543-309-21	s	BEAD, FERRITE
FB502	1-543-309-21	s	BEAD, FERRITE
FB503	1-543-309-21	s	BEAD, FERRITE
FB700	1-543-309-21	s	BEAD, FERRITE

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
FB701	1-543-309-21	s BEAD, FERRITE
FB702	1-543-309-21	s BEAD, FERRITE
FB703	1-543-309-21	s BEAD, FERRITE
FB705	1-543-309-21	s BEAD, FERRITE
FB706	1-543-309-21	s BEAD, FERRITE
FB707	1-543-309-21	s BEAD, FERRITE
FB708	1-543-309-21	s BEAD, FERRITE
FB709	1-543-309-21	s BEAD, FERRITE
FB710	1-543-309-21	s BEAD, FERRITE
FB711	1-543-309-21	s BEAD, FERRITE
FB712	1-543-309-21	s BEAD, FERRITE
FB713	1-543-309-21	s BEAD, FERRITE
FB714	1-543-309-21	s BEAD, FERRITE
FB715	1-543-309-21	s BEAD, FERRITE
FB716	1-543-309-21	s BEAD, FERRITE
FB717	1-543-309-21	s BEAD, FERRITE
FB726	1-543-309-21	s BEAD, FERRITE
FB727	1-543-309-21	s BEAD, FERRITE
FB728	1-543-309-21	s BEAD, FERRITE
FB729	1-543-309-21	s BEAD, FERRITE
FB730	1-543-309-21	s BEAD, FERRITE
FB732	1-543-309-21	s BEAD, FERRITE
FB733	1-543-309-21	s BEAD, FERRITE
FL300	1-239-719-11	s FILTER, EMI, CHIP (3225)
FL301	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL302	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL303	1-239-719-11	s FILTER, EMI, CHIP (3225)
FL304	1-239-719-11	s FILTER, EMI, CHIP (3225)
FL316	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL317	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL400	1-239-721-11	s FILTER, LOW-PASS
FL401	1-239-721-11	s FILTER, LOW-PASS
FL402	1-239-721-11	s FILTER, LOW-PASS
FL403	1-239-721-11	s FILTER, LOW-PASS
FL404	1-239-721-11	s FILTER, LOW-PASS
FL701	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL702	1-239-898-22	s FILTER, EMI, CHIP (2012)
FL703	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL704	1-239-898-22	s FILTER, EMI, CHIP (2012)
FL705	1-239-898-22	s FILTER, EMI, CHIP (2012)
FL706	1-239-898-22	s FILTER, EMI, CHIP (2012)
FL707	1-239-898-22	s FILTER, EMI, CHIP (2012)
FL719	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL720	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL724	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL731	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL790	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL791	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
IC100	8-759-543-66	s IC SN74LVTH245ANSR
IC110	8-759-386-29	s IC 74LCX574SJ
IC111	8-759-386-29	s IC 74LCX574SJ
IC118	8-759-375-04	s IC CXD8985AQ
IC119	8-759-386-32	s IC 74LCX245SJ
IC120	8-759-386-32	s IC 74LCX245SJ
IC121	8-759-386-32	s IC 74LCX245SJ
IC122	8-759-386-32	s IC 74LCX245SJ
IC123	8-759-386-32	s IC 74LCX245SJ
IC124	8-759-386-32	s IC 74LCX245SJ

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
IC125	8-759-386-32	s IC 74LCX245SJ
IC126	8-759-386-32	s IC 74LCX245SJ
IC127	8-759-386-32	s IC 74LCX245SJ
IC128	8-759-557-59	s IC UPD4516821AG5-A10B-9NF
IC129	8-759-557-59	s IC UPD4516821AG5-A10B-9NF
IC130	8-759-557-59	s IC UPD4516821AG5-A10B-9NF
IC131	8-759-557-59	s IC UPD4516821AG5-A10B-9NF
IC132	8-759-557-59	s IC UPD4516821AG5-A10B-9NF
IC133	8-759-557-59	s IC UPD4516821AG5-A10B-9NF
IC134	8-759-557-59	s IC UPD4516821AG5-A10B-9NF
IC135	8-759-557-59	s IC UPD4516821AG5-A10B-9NF
IC136	8-759-557-59	s IC UPD4516821AG5-A10B-9NF
IC137	8-759-557-59	s IC UPD4516821AG5-A10B-9NF
IC138	8-759-557-59	s IC UPD4516821AG5-A10B-9NF
IC139	8-759-557-59	s IC UPD4516821AG5-A10B-9NF
IC180	8-759-386-26	s IC 74LCX574MTC
IC181	8-759-386-26	s IC 74LCX574MTC
IC190	8-759-543-66	s IC SN74LVTH245ANSR
IC300	8-759-247-03	s IC CXD8810BQ
IC303	8-759-082-57	s IC TC7W04FU
IC304	8-759-542-87	s IC S-80827ANUP-EDQ
IC305	8-759-184-64	s IC TC4W66FU
IC306	8-759-454-75	s IC CXD9008Q
IC307	8-759-082-57	s IC TC7W04FU
IC308	8-759-295-09	s IC TLC2932IPW
IC309	8-759-389-68	s IC 74VHCT04MTC
IC310	8-759-386-32	s IC 74LCX245SJ
IC311	8-759-386-25	s IC 74LCX245MTC
IC312	8-759-234-77	s IC TC4S66F
IC313	8-759-386-25	s IC 74LCX245MTC
IC314	8-759-485-82	s IC MC34182D
IC315	8-759-260-53	s IC LM2903PW
IC316	8-759-058-58	s IC TC7S04FU
IC317	8-759-390-07	s IC CXD8997R
IC318	8-759-175-27	s IC TC74VHC574F
IC319	8-759-651-60	s IC SN74LVTH125PWR
IC320	8-759-035-93	s IC SC7S32F
IC321	8-759-175-27	s IC TC74VHC574F
IC322	8-759-082-57	s IC TC7W04FU
IC323	8-759-925-76	s IC SN74HC08ANS
IC324	8-759-175-27	s IC TC74VHC574F
IC325	8-759-175-27	s IC TC74VHC574F
IC326	8-759-386-25	s IC 74LCX245MTC
IC327	8-759-186-39	s IC TC74VHC74F
IC328	8-759-052-52	s IC L78M05T-FA
IC329	8-759-184-64	s IC TC4W66FU
IC330	8-759-386-25	s IC 74LCX245MTC
IC350	8-759-524-28	s IC TC74VHC245FT(EL)
IC351	8-759-524-28	s IC TC74VHC245FT(EL)
IC352	8-759-524-28	s IC TC74VHC245FT(EL)
IC353	8-759-524-28	s IC TC74VHC245FT(EL)
IC356	8-759-523-94	s IC TC74VHC32FT(EL)
IC357	8-759-491-46	s IC TC74VHCT04AFT
IC358	8-759-523-95	s IC TC74VHC74FT(EL)
IC359	8-759-523-95	s IC TC74VHC74FT(EL)
IC360	8-759-523-94	s IC TC74VHC32FT(EL)
IC361	8-759-523-96	s IC TC74VHC86FT(EL)
IC362	8-759-547-51	s IC TC551402J-25
IC363	8-759-547-51	s IC TC551402J-25

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP	Description
IC364	8-759-547-51	s IC	TC551402J-25
IC365	8-759-547-51	s IC	TC551402J-25
IC366	8-759-523-81	s IC	TC74VHC08FT(EL)
IC370	8-759-524-18	s IC	TC74VHC163FT(EL)
IC371	8-759-524-18	s IC	TC74VHC163FT(EL)
IC372	8-759-524-18	s IC	TC74VHC163FT(EL)
IC373	8-759-524-18	s IC	TC74VHC163FT(EL)
IC374	8-759-524-18	s IC	TC74VHC163FT(EL)
IC375	8-759-524-18	s IC	TC74VHC163FT(EL)
IC390	8-759-184-64	s IC	TC4W66FU
IC391	8-759-175-27	s IC	TC74VHC574F
IC392	8-759-175-27	s IC	TC74VHC574F
IC393	8-759-524-52	s IC	TC74VHC574FT(EL)
IC394	8-759-234-20	s IC	TC7S08F
IC395	8-759-523-94	s IC	TC74VHC32FT(EL)
IC397	8-759-058-58	s IC	TC7S04FU
IC400	8-759-929-26	s IC	TL431CPS
IC401	8-759-052-52	s IC	L78M05T-FA
IC403	8-752-357-63	s IC	CXD2308Q
IC404	8-759-822-95	s IC	L79M05T-FA
IC405	8-759-907-81	s IC	SN74LS221NS
IC406	8-759-271-04	s IC	LT1252CS8
IC407	8-759-271-04	s IC	LT1252CS8
IC408	8-759-271-04	s IC	LT1252CS8
IC409	8-759-485-82	s IC	MC34182D
IC410	8-759-485-82	s IC	MC34182D
IC411	8-759-485-82	s IC	MC34182D
IC412	8-759-082-61	s IC	TC4W53FU
IC413	8-759-082-61	s IC	TC4W53FU
IC414	8-759-082-61	s IC	TC4W53FU
IC415	8-759-392-64	s IC	AD828AR
IC416	8-759-392-64	s IC	AD828AR
IC417	8-759-052-52	s IC	L78M05T-FA
IC418	8-759-929-26	s IC	TL431CPS
IC420	8-752-357-63	s IC	CXD2308Q
IC421	8-759-822-95	s IC	L79M05T-FA
IC422	8-759-082-58	s IC	TC7W08FU
IC423	8-759-271-04	s IC	LT1252CS8
IC424	8-759-271-04	s IC	LT1252CS8
IC425	8-759-485-82	s IC	MC34182D
IC426	8-759-485-82	s IC	MC34182D
IC427	8-759-082-61	s IC	TC4W53FU
IC428	8-759-082-61	s IC	TC4W53FU
IC429	8-752-052-77	s IC	CXA1450M
IC430	8-759-392-64	s IC	AD828AR
IC500	8-759-052-52	s IC	L78M05T-FA
IC501	8-759-822-95	s IC	L79M05T-FA
IC502	8-759-234-08	s IC	TA78L05F
IC503	8-759-446-74	s IC	TA79L05F
IC504	8-759-195-81	s IC	TC7S86FU
IC505	8-759-485-83	s IC	MC34184DR2
IC506	8-759-009-07	s IC	MC14053BF
IC507	8-759-987-27	s IC	LM1881M
IC508	8-759-239-58	s IC	TC74HC221AF
IC509	8-759-295-09	s IC	TLC2932IPW
IC510	8-759-485-82	s IC	MC34182D
IC511	8-759-262-03	s IC	MC14577CF
IC512	8-759-260-53	s IC	LM2903PW
IC513	8-759-242-68	s IC	TC7W32F

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP	Description
IC514	8-759-702-08	s IC	NJM360M
IC516	8-759-082-61	s IC	TC4W53FU
IC517	8-759-082-57	s IC	TC7W04FU
IC518	8-759-925-79	s IC	SN74HC11ANS
IC519	8-759-184-64	s IC	TC4W66FU
IC520	8-759-260-53	s IC	LM2903PW
IC521	8-759-907-81	s IC	SN74LS221NS
IC522	8-759-702-08	s IC	NJM360M
IC523	8-759-175-66	s IC	CXD8817Q
IC524	8-759-485-82	s IC	MC34182D
IC525	8-759-907-81	s IC	SN74LS221NS
IC526	8-759-082-57	s IC	TC7W04FU
IC527	8-759-082-57	s IC	TC7W04FU
IC528	8-759-186-63	s IC	TC74VHC245F
IC529	8-759-081-48	s IC	TC74VHC08F
IC530	8-759-240-87	s IC	TC74HCT157AF
IC531	8-759-240-87	s IC	TC74HCT157AF
IC532	8-759-081-44	s IC	TC74VHC04F
IC533	8-759-269-09	s IC	SN74HCT04ANS
IC534	8-759-239-55	s IC	TC74HC123AF
IC535	8-759-035-93	s IC	SC7S32F
IC590	8-759-184-64	s IC	TC4W66FU
IC690	8-729-046-85	s IC	TRANSISTOR SI9945AEY
IC691	8-759-485-82	s IC	MC34182D
IC692	8-759-009-07	s IC	MC14053BF
IC693	8-729-040-75	s IC	TRANSISTOR SI4953DY
IC700	8-759-082-58	s IC	TC7W08FU
IC701	8-752-334-64	s IC	CXD1171M
IC702	8-759-926-15	s IC	SN74HC151ANS
IC703	8-759-082-57	s IC	TC7W04FU
IC704	8-759-926-23	s IC	SN74HC163ANS
IC705	8-759-702-08	s IC	NJM360M
IC706	8-759-186-39	s IC	TC74VHC74F
IC707	8-759-295-09	s IC	TLC2932IPW
IC708	8-752-334-64	s IC	CXD1171M
IC709	8-759-389-68	s IC	74VHCT04MTC
IC710	8-759-485-82	s IC	MC34182D
IC711	8-759-702-08	s IC	NJM360M
IC712	8-759-926-15	s IC	SN74HC151ANS
IC713	8-759-907-81	s IC	SN74LS221NS
IC714	8-759-175-65	s IC	CXD8821Q
IC715	8-759-262-03	s IC	MC14577CF
IC716	8-759-009-07	s IC	MC14053BF
IC717	8-759-386-25	s IC	74LCX245MTC
IC718	8-759-485-83	s IC	MC34184DR2
IC719	8-759-386-32	s IC	74LCX245SJ
IC720	8-759-082-57	s IC	TC7W04FU
IC721	8-759-260-53	s IC	LM2903PW
IC722	8-759-386-25	s IC	74LCX245MTC
IC723	8-759-925-76	s IC	SN74HC08ANS
IC724	8-759-386-25	s IC	74LCX245MTC
IC725	8-759-058-58	s IC	TC7S04FU
IC726	8-759-260-53	s IC	LM2903PW
IC727	8-759-925-85	s IC	SN74HC32ANS
IC728	8-759-524-28	s IC	TC74VHC245FT(EL)
IC729	8-759-234-77	s IC	TC4S66F
IC730	8-759-081-44	s IC	TC74VHC04F
IC731	8-759-386-25	s IC	74LCX245MTC
IC732	8-759-234-77	s IC	TC4S66F

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
IC733	8-759-986-32	s IC 74ACT244SJ
IC734	8-759-386-25	s IC 74LCX245MTC
IC735	8-759-386-32	s IC 74LCX245SJ
IC736	8-759-081-42	s IC TC74VHC00F
IC737	8-759-081-42	s IC TC74VHC00F
IC738	8-759-081-42	s IC TC74VHC00F
IC740	8-759-386-32	s IC 74LCX245SJ
IC742	8-759-386-32	s IC 74LCX245SJ
IC743	8-759-386-32	s IC 74LCX245SJ
IC744	8-759-543-66	s IC SN74LVTH245ANSR
IC790	8-759-386-25	s IC 74LCX245MTC
IC791	8-759-386-25	s IC 74LCX245MTC
IC890	8-759-523-81	s IC TC74VHC08FT(EL)
IC900	8-759-391-30	s IC 74LVX3245QSC
IC901	8-759-186-63	s IC TC74VHC245F
IC902	8-759-391-30	s IC 74LVX3245QSC
IC903	8-759-391-30	s IC 74LVX3245QSC
IC904	8-759-154-60	s IC UPD71055GB-10-3B4
IC905	8-759-154-60	s IC UPD71055GB-10-3B4
IC906	8-759-186-47	s IC TC74VHC138F
IC907	8-759-081-44	s IC TC74VHC04F
IC908	8-759-081-44	s IC TC74VHC04F
IC909	8-759-251-40	s IC MB88E346PFV-G-BND-ER
IC910	8-759-389-68	s IC 74VHCT04MTC
IC914	8-759-081-44	s IC TC74VHC04F
IC916	8-759-277-63	s IC TC7W14FU
IC922	8-759-386-32	s IC 74LCX245SJ
IC923	8-759-186-63	s IC TC74VHC245F
L100	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L190	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L300	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L301	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L302	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L303	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L304	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L305	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L306	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L307	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L400	1-412-166-11	s INDUCTOR, CHIP 0.18uH (3225)
L401	1-412-190-11	s INDUCTOR, CHIP 33uH (3225)
L402	1-412-190-11	s INDUCTOR, CHIP 33uH (3225)
L403	1-412-143-11	s INDUCTOR, CHIP 39uH (3225)
L404	1-412-137-11	s INDUCTOR, CHIP 10uH (3225)
L405	1-412-137-11	s INDUCTOR, CHIP 10uH (3225)
L406	1-412-166-11	s INDUCTOR, CHIP 0.18uH (3225)
L407	1-412-166-11	s INDUCTOR, CHIP 0.18uH (3225)
L408	1-412-143-11	s INDUCTOR, CHIP 39uH (3225)
L409	1-412-143-11	s INDUCTOR, CHIP 39uH (3225)
L410	1-412-190-11	s INDUCTOR, CHIP 33uH (3225)
L411	1-424-641-11	s COIL, CHOKE 22uH
L412	1-409-579-11	s COIL, CHOKE 8.2uH
L413	1-409-579-11	s COIL, CHOKE 8.2uH
L414	1-409-579-11	s COIL, CHOKE 8.2uH
L500	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L501	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L502	1-412-138-11	s INDUCTOR, CHIP 100uH (3225)
L503	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L504	1-412-188-11	s INDUCTOR, CHIP 22uH (3225)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
L505	1-412-143-11	s INDUCTOR, CHIP 39uH (3225)
L506	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L507	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L690	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L693	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L696	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L700	1-410-381-11	s INDUCTOR, CHIP 10uH (3225)
L701	1-410-381-11	s INDUCTOR, CHIP 10uH (3225)
L702	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L703	1-412-191-11	s INDUCTOR, CHIP 47uH (3225)
L704	1-412-191-11	s INDUCTOR, CHIP 47uH (3225)
L705	1-412-191-11	s INDUCTOR, CHIP 47uH (3225)
L706	1-412-191-11	s INDUCTOR, CHIP 47uH (3225)
L707	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L708	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L709	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L710	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L711	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L712	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L713	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L714	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L900	1-424-641-11	s COIL, CHOKE 22uH
L901	1-409-579-11	s COIL, CHOKE 8.2uH
L902	1-409-579-11	s COIL, CHOKE 8.2uH
L903	1-424-641-11	s COIL, CHOKE 22uH
L904	1-424-641-11	s COIL, CHOKE 22uH
PS900	▲ 1-533-275-21	s FUSE, CHIP 5A 125V
Q400	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q401	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q402	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q403	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q404	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q500	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q501	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q502	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q503	8-729-029-14	s TRANSISTOR DTC144EUA
Q504	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q505	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q506	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q507	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q508	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q509	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q690	8-729-028-91	s TRANSISTOR DTA144EUA
Q691	8-729-028-91	s TRANSISTOR DTA144EUA
Q700	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q701	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
R100	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R101	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R102	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R103	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R104	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R105	1-216-295-00	s METAL, CHIP 0 (2012)
R106	1-216-295-00	s METAL, CHIP 0 (2012)
R107	1-216-295-00	s METAL, CHIP 0 (2012)
R108	1-216-295-00	s METAL, CHIP 0 (2012)
R109	1-216-295-00	s METAL, CHIP 0 (2012)
R110	1-216-295-00	s METAL, CHIP 0 (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
R111	1-216-295-00	s METAL, CHIP 0 (2012)
R112	1-216-295-00	s METAL, CHIP 0 (2012)
R113	1-216-295-00	s METAL, CHIP 0 (2012)
R114	1-216-295-00	s METAL, CHIP 0 (2012)
R115	1-216-295-00	s METAL, CHIP 0 (2012)
R116	1-216-295-00	s METAL, CHIP 0 (2012)
R117	1-216-295-00	s METAL, CHIP 0 (2012)
R118	1-216-295-00	s METAL, CHIP 0 (2012)
R119	1-216-295-00	s METAL, CHIP 0 (2012)
R120	1-216-295-00	s METAL, CHIP 0 (2012)
R121	1-216-295-00	s METAL, CHIP 0 (2012)
R122	1-216-295-00	s METAL, CHIP 0 (2012)
R123	1-216-295-00	s METAL, CHIP 0 (2012)
R124	1-216-295-00	s METAL, CHIP 0 (2012)
R125	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R126	1-216-075-00	s METAL, CHIP 12K 5% 1/10W (2012)
R127	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R128	1-216-075-00	s METAL, CHIP 12K 5% 1/10W (2012)
R129	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R130	1-216-075-00	s METAL, CHIP 12K 5% 1/10W (2012)
R131	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R132	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R133	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R134	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R135	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R136	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R137	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R138	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R139	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R140	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R141	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R142	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R143	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R144	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R145	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R146	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R147	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R148	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R149	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R150	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R151	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R152	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R153	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R154	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R155	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R156	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R157	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R181	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R182	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R183	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R184	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R190	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R194	1-216-295-00	s METAL, CHIP 0 (2012)
R302	1-216-295-00	s METAL, CHIP 0 (2012)
R308	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R309	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R310	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R314	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R315	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
R316	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R317	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R318	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R319	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R320	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R321	1-216-295-00	s METAL, CHIP 0 (2012)
R322	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R323	1-216-295-00	s METAL, CHIP 0 (2012)
R324	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R325	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R326	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R327	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R328	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R329	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R330	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R331	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R332	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R333	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R334	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R335	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R336	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R337	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R338	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R339	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R340	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R341	1-216-681-11	s METAL, CHIP 18K 0.5% 1/10W (2012)
R342	1-216-671-11	s METAL, CHIP 6.8K 0.5% 1/10W (2012)
R343	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R344	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R345	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R346	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R347	1-216-295-00	s METAL, CHIP 0 (2012)
R349	1-216-113-00	s METAL, CHIP 470K 5% 1/10W (2012)
R350	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R351	1-216-295-00	s METAL, CHIP 0 (2012)
R352	1-216-298-00	s METAL, CHIP 2.2 5% 1/10W (2012)
R354	1-216-295-00	s METAL, CHIP 0 (2012)
R355	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R356	1-216-295-00	s METAL, CHIP 0 (2012)
R357	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R358	1-216-295-00	s METAL, CHIP 0 (2012)
R370	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R371	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R390	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R391	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R392	1-216-295-00	s METAL, CHIP 0 (2012)
R394	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R400	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R401	1-216-680-11	s METAL, CHIP 16K 0.5% 1/10W (2012)
R402	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R403	1-216-696-11	s METAL, CHIP 75K 0.5% 1/10W (2012)
R404	1-216-680-11	s METAL, CHIP 16K 0.5% 1/10W (2012)
R405	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R406	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R407	1-216-678-11	s METAL, CHIP 13K 0.5% 1/10W (2012)
R408	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R409	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R410	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R411	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
R412	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R413	1-216-657-11	s METAL, CHIP 1.8K 0.5% 1/10W (2012)
R414	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R415	1-216-657-11	s METAL, CHIP 1.8K 0.5% 1/10W (2012)
R416	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R417	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R418	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R419	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R420	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R421	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R422	1-216-609-11	s METAL, CHIP 18 0.5% 1/10W (2012)
R423	1-216-625-11	s METAL, CHIP 82 0.5% 1/10W (2012)
R424	1-216-607-11	s METAL, CHIP 15 0.5% 1/10W (2012)
R425	1-216-607-11	s METAL, CHIP 15 0.5% 1/10W (2012)
R426	1-216-656-11	s METAL, CHIP 1.6K 0.5% 1/10W (2012)
R427	1-216-654-11	s METAL, CHIP 1.3K 0.5% 1/10W (2012)
R428	1-216-654-11	s METAL, CHIP 1.3K 0.5% 1/10W (2012)
R429	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R430	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R431	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R432	1-216-685-11	s METAL, CHIP 27K 0.5% 1/10W (2012)
R433	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R434	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R435	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R436	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R437	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R438	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R439	1-216-686-11	s METAL, CHIP 30K 0.5% 1/10W (2012)
R440	1-216-689-11	s METAL, CHIP 39K 0.5% 1/10W (2012)
R441	1-216-689-11	s METAL, CHIP 39K 0.5% 1/10W (2012)
R442	1-216-662-11	s METAL, CHIP 3.0K 0.5% 1/10W (2012)
R443	1-216-662-11	s METAL, CHIP 3.0K 0.5% 1/10W (2012)
R444	1-216-662-11	s METAL, CHIP 3.0K 0.5% 1/10W (2012)
R445	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R446	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R447	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R448	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R450	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R451	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R452	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R453	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R454	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R455	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R456	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R457	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R458	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R459	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R460	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R461	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R462	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R463	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R464	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R465	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R466	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R467	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R468	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R469	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R470	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R471	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
R472	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R473	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R474	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R475	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R476	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R477	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R478	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R479	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R480	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R481	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R500	1-216-298-00	s METAL, CHIP 2.2 5% 1/10W (2012)
R504	1-216-688-11	s METAL, CHIP 36K 0.5% 1/10W (2012)
R505	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R506	1-216-051-00	s METAL, CHIP 1.2K 5% 1/10W (2012)
R507	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R508	1-216-649-11	s METAL, CHIP 820 0.5% 1/10W (2012)
R509	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R510	1-216-689-11	s METAL, CHIP 39K 0.5% 1/10W (2012)
R511	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R512	1-216-677-11	s METAL, CHIP 12K 0.5% 1/10W (2012)
R513	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R514	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R515	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R516	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R517	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R518	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R519	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R520	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R521	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R522	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R523	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R524	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R525	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R526	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R527	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R528	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R529	1-216-093-00	s METAL, CHIP 68K 5% 1/10W (2012)
R530	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R531	1-216-083-00	s METAL, CHIP 27K 5% 1/10W (2012)
R532	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R533	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R534	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R535	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R536	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R537	1-216-295-00	s METAL, CHIP 0 (2012)
R538	1-216-298-00	s METAL, CHIP 2.2 5% 1/10W (2012)
R539	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R540	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R541	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R542	1-216-673-11	s METAL, CHIP 8.2K 0.5% 1/10W (2012)
R543	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R544	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R545	1-216-671-11	s METAL, CHIP 6.8K 0.5% 1/10W (2012)
R546	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R547	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R548	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R549	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R550	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R551	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R552	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
R553	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R554	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R555	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R557	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R558	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R559	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R560	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R561	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R562	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R563	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R564	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R565	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R567	1-216-051-00	s METAL, CHIP 1.2K 5% 1/10W (2012)
R568	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R569	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R570	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R571	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R572	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R573	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R574	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R575	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R576	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R577	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R578	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R579	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R580	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R581	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R582	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R583	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R584	1-216-693-11	s METAL, CHIP 56K 0.5% 1/10W (2012)
R585	1-216-295-00	s METAL, CHIP 0 (2012)
R586	1-216-697-11	s METAL, CHIP 82K 0.5% 1/10W (2012)
R587	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R588	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R589	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R590	1-216-085-00	s METAL, CHIP 33K 5% 1/10W (2012)
R591	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R592	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R593	1-216-113-00	s METAL, CHIP 470K 5% 1/10W (2012)
R594	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R595	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R596	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R597	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R598	1-216-693-11	s METAL, CHIP 56K 0.5% 1/10W (2012)
R599	1-216-295-00	s METAL, CHIP 0 (2012)
R600	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R601	1-216-295-00	s METAL, CHIP 0 (2012)
R602	1-216-295-00	s METAL, CHIP 0 (2012)
R603	1-216-295-00	s METAL, CHIP 0 (2012)
R604	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R605	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R606	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R607	1-216-295-00	s METAL, CHIP 0 (2012)
R608	1-216-295-00	s METAL, CHIP 0 (2012)
R609	1-216-295-00	s METAL, CHIP 0 (2012)
R610	1-216-295-00	s METAL, CHIP 0 (2012)
R611	1-216-295-00	s METAL, CHIP 0 (2012)
R612	1-216-295-00	s METAL, CHIP 0 (2012)
R614	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
R615	1-216-113-00	s METAL, CHIP 470K 5% 1/10W (2012)
R616	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R617	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R618	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R619	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R620	1-216-295-00	s METAL, CHIP 0 (2012)
R621	1-216-295-00	s METAL, CHIP 0 (2012)
R622	1-216-295-00	s METAL, CHIP 0 (2012)
R623	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R691	1-216-085-00	s METAL, CHIP 33K 5% 1/10W (2012)
R692	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R693	1-216-085-00	s METAL, CHIP 33K 5% 1/10W (2012)
R694	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R695	1-216-295-00	s METAL, CHIP 0 (2012)
R696	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R697	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R700	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R701	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R702	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R703	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R704	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R705	1-216-671-11	s METAL, CHIP 6.8K 0.5% 1/10W (2012)
R706	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R707	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R708	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R709	1-216-685-11	s METAL, CHIP 27K 0.5% 1/10W (2012)
R710	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R711	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R712	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R713	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R714	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R715	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R716	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R717	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R718	1-216-671-11	s METAL, CHIP 6.8K 0.5% 1/10W (2012)
R719	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R720	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R721	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R722	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R723	1-216-685-11	s METAL, CHIP 27K 0.5% 1/10W (2012)
R724	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R725	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R726	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R727	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R728	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R729	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R730	1-216-697-11	s METAL, CHIP 82K 0.5% 1/10W (2012)
R731	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R732	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R733	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R734	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R735	1-216-685-11	s METAL, CHIP 27K 0.5% 1/10W (2012)
R736	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R737	1-216-672-11	s METAL, CHIP 7.5K 0.5% 1/10W (2012)
R738	1-216-671-11	s METAL, CHIP 6.8K 0.5% 1/10W (2012)
R739	1-216-678-11	s METAL, CHIP 13K 0.5% 1/10W (2012)
R740	1-216-689-11	s METAL, CHIP 39K 0.5% 1/10W (2012)
R741	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R742	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
R743	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R744	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R745	1-216-662-11	s METAL, CHIP 3.0K 0.5% 1/10W (2012)
R746	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R747	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R748	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R749	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R750	1-216-662-11	s METAL, CHIP 3.0K 0.5% 1/10W (2012)
R751	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R752	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R753	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R754	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R755	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R756	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R757	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R758	1-216-079-00	s METAL, CHIP 18K 5% 1/10W (2012)
R759	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R760	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R761	1-216-295-00	s METAL, CHIP 0 (2012)
R762	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R763	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R764	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R767	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R768	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R769	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R770	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R771	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R772	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R773	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R775	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R776	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R777	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R778	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R779	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R780	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R781	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R782	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R783	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R784	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R785	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R786	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R787	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R788	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R789	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R791	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R792	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R793	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R794	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R795	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R797	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R798	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R799	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R801	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R802	1-216-295-00	s METAL, CHIP 0 (2012)
R803	1-216-295-00	s METAL, CHIP 0 (2012)
R804	1-216-295-00	s METAL, CHIP 0 (2012)
R805	1-216-295-00	s METAL, CHIP 0 (2012)
R806	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R807	1-216-295-00	s METAL, CHIP 0 (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP Description
R808	1-216-295-00	s METAL, CHIP 0 (2012)
R809	1-216-295-00	s METAL, CHIP 0 (2012)
R810	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R811	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R812	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R813	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R814	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R815	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R816	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R817	1-216-295-00	s METAL, CHIP 0 (2012)
R818	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R819	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R820	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R821	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R890	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R891	1-216-295-00	s METAL, CHIP 0 (2012)
R893	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R894	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R900	1-216-295-00	s METAL, CHIP 0 (2012)
R901	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R903	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R904	1-216-295-00	s METAL, CHIP 0 (2012)
R905	1-216-295-00	s METAL, CHIP 0 (2012)
R906	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R907	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R908	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R909	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R910	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R911	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R912	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R913	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R914	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R915	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R916	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R917	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R927	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R928	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R990	1-216-295-00	s METAL, CHIP 0 (2012)
R1000	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1001	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R1002	1-216-678-11	s METAL, CHIP 13K 0.5% 1/10W (2012)
R1003	1-216-696-11	s METAL, CHIP 75K 0.5% 1/10W (2012)
R1004	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R1005	1-216-696-11	s METAL, CHIP 75K 0.5% 1/10W (2012)
R1006	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R1007	1-216-678-11	s METAL, CHIP 13K 0.5% 1/10W (2012)
R1008	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R1009	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R1010	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R1011	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R1012	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R1013	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R1014	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R1015	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1016	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R1017	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1018	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R1019	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R1020	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP	Description
R1021	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R1022	1-216-670-11	s	METAL, CHIP 6.2K 0.5% 1/10W (2012)
R1023	1-216-666-11	s	METAL, CHIP 4.3K 0.5% 1/10W (2012)
R1024	1-216-670-11	s	METAL, CHIP 6.2K 0.5% 1/10W (2012)
R1025	1-216-666-11	s	METAL, CHIP 4.3K 0.5% 1/10W (2012)
R1026	1-216-635-11	s	METAL, CHIP 220 0.5% 1/10W (2012)
R1027	1-216-065-00	s	METAL, CHIP 4.7K 5% 1/10W (2012)
R1028	1-216-631-11	s	METAL, CHIP 150 0.5% 1/10W (2012)
R1029	1-216-631-11	s	METAL, CHIP 150 0.5% 1/10W (2012)
R1030	1-216-609-11	s	METAL, CHIP 18 0.5% 1/10W (2012)
R1031	1-216-625-11	s	METAL, CHIP 82 0.5% 1/10W (2012)
R1032	1-216-609-11	s	METAL, CHIP 18 0.5% 1/10W (2012)
R1033	1-216-625-11	s	METAL, CHIP 82 0.5% 1/10W (2012)
R1034	1-216-656-11	s	METAL, CHIP 1.6K 0.5% 1/10W (2012)
R1035	1-216-656-11	s	METAL, CHIP 1.6K 0.5% 1/10W (2012)
R1036	1-216-631-11	s	METAL, CHIP 150 0.5% 1/10W (2012)
R1037	1-216-631-11	s	METAL, CHIP 150 0.5% 1/10W (2012)
R1038	1-216-025-00	s	METAL, CHIP 100 5% 1/10W (2012)
R1039	1-216-631-11	s	METAL, CHIP 150 0.5% 1/10W (2012)
R1040	1-216-631-11	s	METAL, CHIP 150 0.5% 1/10W (2012)
R1041	1-216-667-11	s	METAL, CHIP 4.7K 0.5% 1/10W (2012)
R1042	1-216-667-11	s	METAL, CHIP 4.7K 0.5% 1/10W (2012)
R1043	1-216-689-11	s	METAL, CHIP 39K 0.5% 1/10W (2012)
R1044	1-216-689-11	s	METAL, CHIP 39K 0.5% 1/10W (2012)
R1045	1-216-662-11	s	METAL, CHIP 3.0K 0.5% 1/10W (2012)
R1046	1-216-662-11	s	METAL, CHIP 3.0K 0.5% 1/10W (2012)
R1047	1-216-653-11	s	METAL, CHIP 1.2K 0.5% 1/10W (2012)
R1048	1-216-653-11	s	METAL, CHIP 1.2K 0.5% 1/10W (2012)
R1049	1-216-133-00	s	METAL, CHIP 3.3M 5% 1/10W (2012)
R1050	1-216-133-00	s	METAL, CHIP 3.3M 5% 1/10W (2012)
R1051	1-216-069-00	s	METAL, CHIP 6.8K 5% 1/10W (2012)
R1052	1-216-069-00	s	METAL, CHIP 6.8K 5% 1/10W (2012)
R1053	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R1054	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R1055	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R1056	1-216-653-11	s	METAL, CHIP 1.2K 0.5% 1/10W (2012)
R1057	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R1058	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1059	1-216-041-00	s	METAL, CHIP 470 5% 1/10W (2012)
R1060	1-216-661-11	s	METAL, CHIP 2.7K 0.5% 1/10W (2012)
R1061	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R1062	1-216-663-11	s	METAL, CHIP 3.3K 0.5% 1/10W (2012)
R1064	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1065	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1066	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R1067	1-216-663-11	s	METAL, CHIP 3.3K 0.5% 1/10W (2012)
R1068	1-216-623-11	s	METAL, CHIP 68 0.5% 1/10W (2012)
R1069	1-216-009-00	s	METAL, CHIP 22 5% 1/10W (2012)
R1070	1-216-041-00	s	METAL, CHIP 470 5% 1/10W (2012)
R1071	1-216-661-11	s	METAL, CHIP 2.7K 0.5% 1/10W (2012)
R1073	1-216-049-00	s	METAL, CHIP 1.0K 5% 1/10W (2012)
R1074	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1075	1-216-081-00	s	METAL, CHIP 22K 5% 1/10W (2012)
R1076	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R1077	1-216-017-00	s	METAL, CHIP 47 5% 1/10W (2012)
R1078	1-216-623-11	s	METAL, CHIP 68 0.5% 1/10W (2012)
R1079	1-216-623-11	s	METAL, CHIP 68 0.5% 1/10W (2012)
R1080	1-216-041-00	s	METAL, CHIP 470 5% 1/10W (2012)
R1081	1-216-661-11	s	METAL, CHIP 2.7K 0.5% 1/10W (2012)

(VPR-47 BOARD for DNW-75)

Ref. No. or Q'ty	Part No.	SP	Description
R1082	1-216-081-00	s	METAL, CHIP 22K 5% 1/10W (2012)
R1083	1-216-651-11	s	METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1088	1-216-295-00	s	METAL, CHIP 0 (2012)
RB100	1-239-628-11	s	RES, NETWORK, CHIP 220x8 (6432)
RB102	1-239-628-11	s	RES, NETWORK, CHIP 220x8 (6432)
RB104	1-239-309-11	s	RES, NETWORK, CHIP 100Kx8 (6432)
RB190	1-239-628-11	s	RES, NETWORK, CHIP 220x8 (6432)
RB191	1-239-628-11	s	RES, NETWORK, CHIP 220x8 (6432)
RB192	1-239-628-11	s	RES, NETWORK, CHIP 220x8 (6432)
RB300	1-239-628-11	s	RES, NETWORK, CHIP 220x8 (6432)
RB301	1-239-628-11	s	RES, NETWORK, CHIP 220x8 (6432)
RB302	1-239-628-11	s	RES, NETWORK, CHIP 220x8 (6432)
RB303	1-239-306-11	s	RES, NETWORK, CHIP 10Kx8 (6432)
RB304	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB305	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB306	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB307	1-239-628-11	s	RES, NETWORK, CHIP 220x8 (6432)
RB308	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB309	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB310	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB311	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB312	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB313	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB314	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB315	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB316	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB317	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB318	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB319	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB320	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB321	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB322	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB323	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB324	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB325	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB326	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB327	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB328	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB329	1-239-412-11	s	RES, NETWORK, CHIP 100x4 (3216)
RB500	1-239-628-11	s	RES, NETWORK, CHIP 220x8 (6432)
RB700	1-239-303-11	s	RES, NETWORK, CHIP 1.0Kx8 (6432)
RB890	1-236-907-11	s	RES, NETWORK, CHIP 100Kx4 (3216)
RB900	1-239-309-11	s	RES, NETWORK, CHIP 100Kx8 (6432)
RB901	1-239-309-11	s	RES, NETWORK, CHIP 100Kx8 (6432)
RB902	1-239-309-11	s	RES, NETWORK, CHIP 100Kx8 (6432)
RB903	1-239-309-11	s	RES, NETWORK, CHIP 100Kx8 (6432)
RB904	1-239-309-11	s	RES, NETWORK, CHIP 100Kx8 (6432)
RB905	1-239-309-11	s	RES, NETWORK, CHIP 100Kx8 (6432)
RB906	1-239-309-11	s	RES, NETWORK, CHIP 100Kx8 (6432)
RB907	1-239-309-11	s	RES, NETWORK, CHIP 100Kx8 (6432)
RB908	1-239-309-11	s	RES, NETWORK, CHIP 100Kx8 (6432)
RB909	1-239-309-11	s	RES, NETWORK, CHIP 100Kx8 (6432)

VPR-47 BOARD for DNW-75P

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8319-303-A	o	MOUNTED CIRCUIT BOARD, VPR-47P
1pc	3-179-084-01	s	LEVER (R), PC BOARD
1pc	3-179-085-01	s	LEVER (L), PC BOARD
C100	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C101	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C103	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C114	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C121	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C123	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C125	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C127	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C129	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C130	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C131	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C132	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C133	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C134	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C135	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C136	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C137	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C138	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C139	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C140	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C141	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C142	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C143	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C144	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C145	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C146	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C147	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C148	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C149	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C150	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C151	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C152	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C153	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C154	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C180	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C181	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C182	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C190	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C300	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C301	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C302	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C303	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C304	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C305	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C306	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C307	1-128-397-21	s	ELECT 100uF 20% 16V
C308	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C309	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C313	1-128-394-11	s	ELECT 220uF 20% 10V
C314	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C315	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C316	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C317	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C318	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C319	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP	Description
C320	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C321	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C325	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C326	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C327	1-128-393-11	s	ELECT 100uF 20% 10V
C328	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C329	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C330	1-163-021-11	s	CERAMIC, CHIP 0.01uF 10% 50V (2012)
C331	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C332	1-128-393-11	s	ELECT 100uF 20% 10V
C333	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C334	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C335	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C336	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C337	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C338	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C339	1-128-397-21	s	ELECT 100uF 20% 16V
C340	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C341	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C342	1-107-854-11	s	TANTALUM, CHIP 68uF 20% 6.3V (5833)
C343	1-107-854-11	s	TANTALUM, CHIP 68uF 20% 6.3V (5833)
C344	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C345	1-128-393-11	s	ELECT 100uF 20% 10V
C346	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C347	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C348	1-128-393-11	s	ELECT 100uF 20% 10V
C349	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C350	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C351	1-128-394-11	s	ELECT 220uF 20% 10V
C352	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C354	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C356	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C357	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C358	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C359	1-113-987-11	s	TANTALUM, CHIP 4.7uF 20% 25V (5833)
C360	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C361	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C364	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C370	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C371	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C372	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C373	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C374	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C375	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C376	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C377	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C378	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C379	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C380	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C381	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C382	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C383	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C384	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C385	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C386	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C387	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C388	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C389	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C390	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP	Description
C391	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C392	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C393	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C394	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C395	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C396	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C397	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C398	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C399	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C400	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C401	1-128-393-11	s	ELECT 100uF 20% 10V
C402	1-127-516-11	s	ALUMN SOLID 220uF 20% 10V
C403	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C405	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C406	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C407	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C408	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C409	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C410	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C411	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C412	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C413	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C414	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C415	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C416	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C417	1-128-393-11	s	ELECT 100uF 20% 10V
C418	1-128-393-11	s	ELECT 100uF 20% 10V
C419	1-127-516-11	s	ALUMN SOLID 220uF 20% 10V
C420	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C421	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C422	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C423	1-127-516-11	s	ALUMN SOLID 220uF 20% 10V
C424	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C425	1-163-089-00	s	CERAMIC, CHIP 6pF 50V (2012)
C426	1-164-690-11	s	CERAMIC, CHIP 220pF 5% 50V (2012)
C427	1-164-690-11	s	CERAMIC, CHIP 220pF 5% 50V (2012)
C428	1-164-690-11	s	CERAMIC, CHIP 220pF 5% 50V (2012)
C429	1-164-685-11	s	CERAMIC, CHIP 130pF 5% 50V (2012)
C430	1-163-243-11	s	CERAMIC, CHIP 47pF 5% 50V (2012)
C431	1-163-087-00	s	CERAMIC, CHIP 4pF 50V (2012)
C432	1-163-220-11	s	CERAMIC, CHIP 3pF 50V (2012)
C433	1-163-220-11	s	CERAMIC, CHIP 3pF 50V (2012)
C434	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C435	1-135-210-11	s	TANTALUM, CHIP 4.7uF 20% 10V (3216)
C436	1-135-210-11	s	TANTALUM, CHIP 4.7uF 20% 10V (3216)
C437	1-135-210-11	s	TANTALUM, CHIP 4.7uF 20% 10V (3216)
C438	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C439	1-135-210-11	s	TANTALUM, CHIP 4.7uF 20% 10V (3216)
C440	1-135-210-11	s	TANTALUM, CHIP 4.7uF 20% 10V (3216)
C441	1-135-210-11	s	TANTALUM, CHIP 4.7uF 20% 10V (3216)
C442	1-135-091-00	s	TANTALUM, CHIP 1.0uF 20% 16V (3216)
C443	1-135-091-00	s	TANTALUM, CHIP 1.0uF 20% 16V (3216)
C444	1-135-091-00	s	TANTALUM, CHIP 1.0uF 20% 16V (3216)
C445	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C446	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C447	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C448	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C449	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C450	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP	Description
C451	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C452	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C453	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C454	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C455	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C456	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C457	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C458	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C462	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C463	1-128-397-21	s	ELECT 100uF 20% 16V
C464	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C465	1-128-397-21	s	ELECT 100uF 20% 16V
C466	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C470	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C471	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C472	1-163-243-11	s	CERAMIC, CHIP 47pF 5% 50V (2012)
C500	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C501	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C502	1-128-393-11	s	ELECT 100uF 20% 10V
C503	1-128-393-11	s	ELECT 100uF 20% 10V
C504	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C505	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C506	1-128-393-11	s	ELECT 100uF 20% 10V
C507	1-128-393-11	s	ELECT 100uF 20% 10V
C508	1-128-393-11	s	ELECT 100uF 20% 10V
C509	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C510	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C511	1-128-393-11	s	ELECT 100uF 20% 10V
C512	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C513	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C514	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C515	1-163-239-11	s	CERAMIC, CHIP 33pF 5% 50V (2012)
C516	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C517	1-163-259-11	s	CERAMIC, CHIP 220pF 5% 50V (2012)
C518	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C519	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C520	1-104-547-11	s	FILM, CHIP 0.0047uF 5% 16V (2012)
C521	1-163-021-11	s	CERAMIC, CHIP 0.01uF 10% 50V (2012)
C522	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C523	1-163-133-00	s	CERAMIC, CHIP 470pF 5% 50V (2012)
C524	1-163-259-11	s	CERAMIC, CHIP 220pF 5% 50V (2012)
C525	1-104-547-11	s	FILM, CHIP 0.0047uF 5% 16V (2012)
C526	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C527	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C528	1-163-259-11	s	CERAMIC, CHIP 220pF 5% 50V (2012)
C529	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C530	1-126-394-11	s	ELECT, CHIP 10uF 20% 16V
C531	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C532	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C533	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C534	1-163-021-11	s	CERAMIC, CHIP 0.01uF 10% 50V (2012)
C535	1-128-393-11	s	ELECT 100uF 20% 10V
C536	1-135-085-21	s	TANTALUM, CHIP 4.7uF 10% 25V (5833)
C537	1-163-251-11	s	CERAMIC, CHIP 100pF 5% 50V (2012)
C538	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C539	1-135-085-21	s	TANTALUM, CHIP 4.7uF 10% 25V (5833)
C540	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)
C541	1-104-559-11	s	FILM, CHIP 0.047uF 5% 16V (3216)
C542	1-163-038-00	s	CERAMIC, CHIP 0.1uF 25V (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
C543	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C544	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C545	1-128-393-11	s ELECT 100uF 20% 10V
C546	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C547	1-163-133-00	s CERAMIC, CHIP 470pF 5% 50V (2012)
C550	1-163-089-00	s CERAMIC, CHIP 6pF 50V (2012)
C551	1-163-085-00	s CERAMIC, CHIP 2pF 50V (2012)
C553	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V (2012)
C554	1-163-239-11	s CERAMIC, CHIP 33pF 5% 50V (2012)
C555	1-128-393-11	s ELECT 100uF 20% 10V
C556	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C557	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C558	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C559	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C560	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C561	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C562	1-128-393-11	s ELECT 100uF 20% 10V
C563	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C564	1-128-393-11	s ELECT 100uF 20% 10V
C565	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C566	1-128-393-11	s ELECT 100uF 20% 10V
C567	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C568	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C569	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C570	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C571	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C572	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C573	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C574	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C575	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C576	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C577	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C578	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C579	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C580	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C581	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C582	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C583	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C584	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C585	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C586	1-163-137-00	s CERAMIC, CHIP 680pF 5% 50V (2012)
C587	1-163-137-00	s CERAMIC, CHIP 680pF 5% 50V (2012)
C589	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C590	1-113-987-11	s TANTALUM, CHIP 4.7uF 20% 25V (5833)
C591	1-113-987-11	s TANTALUM, CHIP 4.7uF 20% 25V (5833)
C593	1-128-393-11	s ELECT 100uF 20% 10V
C594	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C595	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C600	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C601	1-128-393-11	s ELECT 100uF 20% 10V
C680	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C690	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C691	1-128-393-11	s ELECT 100uF 20% 10V
C692	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C693	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C694	1-128-393-11	s ELECT 100uF 20% 10V
C695	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C696	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C697	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
C698	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C699	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C700	1-128-393-11	s ELECT 100uF 20% 10V
C701	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C702	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C703	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C704	1-128-393-11	s ELECT 100uF 20% 10V
C705	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C706	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C707	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C708	1-128-397-21	s ELECT 100uF 20% 16V
C709	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C710	1-128-397-21	s ELECT 100uF 20% 16V
C711	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C712	1-135-179-21	s TANTALUM, CHIP 2.2uF 10% 16V (3216)
C713	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C714	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C715	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V (2012)
C716	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C717	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V (2012)
C719	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C720	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C721	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C722	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C723	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C724	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C725	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C726	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C727	1-163-009-11	s CERAMIC, CHIP 1000pF 10% 50V (2012)
C728	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C729	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C730	1-128-397-21	s ELECT 100uF 20% 16V
C731	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C732	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C733	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V (2012)
C734	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C735	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C736	1-163-113-00	s CERAMIC, CHIP 68pF 5% 50V (2012)
C737	1-128-397-21	s ELECT 100uF 20% 16V
C738	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C739	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C740	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C741	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C742	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C743	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C744	1-128-393-11	s ELECT 100uF 20% 10V
C745	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C746	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C747	1-163-137-00	s CERAMIC, CHIP 680pF 5% 50V (2012)
C748	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C749	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C750	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C751	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C752	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C753	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C754	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C755	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C756	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C757	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
C758	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C759	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C760	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C761	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C762	1-111-253-11	s TANTALUM, CHIP 100uF 20% 6.3V(6032)
C763	1-111-253-11	s TANTALUM, CHIP 100uF 20% 6.3V(6032)
C764	1-111-253-11	s TANTALUM, CHIP 100uF 20% 6.3V(6032)
C765	1-111-253-11	s TANTALUM, CHIP 100uF 20% 6.3V(6032)
C766	1-104-852-11	s TANTALUM, CHIP 22uF 20% 10V (3528)
C767	1-104-852-11	s TANTALUM, CHIP 22uF 20% 10V (3528)
C768	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C769	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C770	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C771	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C772	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C773	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C774	1-104-852-11	s TANTALUM, CHIP 22uF 20% 10V (3528)
C775	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C776	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C777	1-128-397-21	s ELECT 100uF 20% 16V
C778	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C779	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C780	1-128-393-11	s ELECT 100uF 20% 10V
C781	1-128-393-11	s ELECT 100uF 20% 10V
C782	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C783	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C784	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C785	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C786	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C787	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C788	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C789	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C790	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C791	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C792	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C793	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C794	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C795	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C796	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C797	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C798	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C799	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C800	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C801	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C802	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C803	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C804	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C805	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C806	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C807	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C808	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C809	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C810	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C811	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C812	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C813	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C814	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C815	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C816	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
C817	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C818	1-126-394-11	s ELECT, CHIP 10uF 20% 16V
C819	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C820	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C821	1-163-021-11	s CERAMIC, CHIP 0.01uF 10% 50V (2012)
C822	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C823	1-163-235-11	s CERAMIC, CHIP 22pF 5% 50V (2012)
C824	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C825	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C826	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C827	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C890	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C891	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C892	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C893	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C900	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C901	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C902	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C903	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C908	1-128-397-21	s ELECT 100uF 20% 16V
C909	1-128-394-11	s ELECT 220uF 20% 10V
C910	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C911	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C912	1-128-394-11	s ELECT 220uF 20% 10V
C913	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C914	1-128-394-11	s ELECT 220uF 20% 10V
C915	1-128-394-11	s ELECT 220uF 20% 10V
C919	1-163-259-11	s CERAMIC, CHIP 220pF 5% 50V (2012)
C920	1-128-394-11	s ELECT 220uF 20% 10V
C921	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C922	1-128-394-11	s ELECT 220uF 20% 10V
C923	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C924	1-128-394-11	s ELECT 220uF 20% 10V
C925	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C926	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C927	1-128-397-21	s ELECT 100uF 20% 16V
C928	1-128-397-21	s ELECT 100uF 20% 16V
C929	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C930	1-128-397-21	s ELECT 100uF 20% 16V
C931	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1000	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1001	1-127-516-11	s ALUMN SOLID 220uF 20% 10V
C1002	1-128-393-11	s ELECT 100uF 20% 10V
C1003	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1004	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1017	1-128-393-11	s ELECT 100uF 20% 10V
C1018	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1019	1-127-516-11	s ALUMN SOLID 220uF 20% 10V
C1020	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1021	1-128-393-11	s ELECT 100uF 20% 10V
C1022	1-163-037-11	s CERAMIC, CHIP 0.022uF 10% 25V(2012)
C1023	1-127-516-11	s ALUMN SOLID 220uF 20% 10V
C1024	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1025	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1026	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C1027	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1028	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1029	1-135-259-11	s TANTALUM, CHIP 10uF 20% 6.3V (3216)
C1030	1-135-259-11	s TANTALUM, CHIP 10uF 20% 6.3V (3216)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
C1031	1-163-127-00	s CERAMIC, CHIP 270pF 5% 50V (2012)
C1032	1-163-251-11	s CERAMIC, CHIP 100pF 5% 50V (2012)
C1033	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1034	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1035	1-163-089-00	s CERAMIC, CHIP 6pF 50V (2012)
C1036	1-163-089-00	s CERAMIC, CHIP 6pF 50V (2012)
C1037	1-164-690-11	s CERAMIC, CHIP 2200pF 5% 50V (2012)
C1038	1-164-685-11	s CERAMIC, CHIP 1300pF 5% 50V (2012)
C1039	1-164-690-11	s CERAMIC, CHIP 2200pF 5% 50V (2012)
C1040	1-164-685-11	s CERAMIC, CHIP 1300pF 5% 50V (2012)
C1041	1-163-220-11	s CERAMIC, CHIP 3pF 50V (2012)
C1042	1-163-220-11	s CERAMIC, CHIP 3pF 50V (2012)
C1043	1-135-210-11	s TANTALUM, CHIP 4.7uF 20% 10V (3216)
C1044	1-135-210-11	s TANTALUM, CHIP 4.7uF 20% 10V (3216)
C1045	1-135-210-11	s TANTALUM, CHIP 4.7uF 20% 10V (3216)
C1046	1-135-210-11	s TANTALUM, CHIP 4.7uF 20% 10V (3216)
C1047	1-135-091-00	s TANTALUM, CHIP 1.0uF 20% 16V (3216)
C1048	1-135-091-00	s TANTALUM, CHIP 1.0uF 20% 16V (3216)
C1057	1-163-222-11	s CERAMIC, CHIP 5pF 50V (2012)
C1058	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C1059	1-163-229-11	s CERAMIC, CHIP 12pF 5% 50V (2012)
C1060	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1061	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C1062	1-163-227-11	s CERAMIC, CHIP 10pF 5% 50V (2012)
C1064	1-163-094-00	s CERAMIC, CHIP 11pF 5% 50V (2012)
C1065	1-163-096-00	s CERAMIC, CHIP 13pF 5% 50V (2012)
CN113	1-778-261-12	o CONNECTOR, B-B 124P, MALE
CN114	1-778-261-12	o CONNECTOR, B-B 124P, MALE
CN115	1-778-262-12	o CONNECTOR, B-B 148P, MALE
CP300	1-760-263-11	s VCO, CRYSTAL 35.468950 MHz
CP301	1-760-277-11	s VCO, CRYSTAL 28.636360 MHz
CP500	1-760-268-11	s VCO, CRYSTAL 17.734475 MHz
CP501	1-760-267-11	s VCO, CRYSTAL 14.318180 MHz
CP700	1-767-589-11	s OSC, LITHIUM TANTALATE 24.576 MHz
CP701	1-760-275-11	s VCO, CRYSTAL 27.0 MHz
D300	8-719-941-23	s DIODE DA204U
D301	8-719-941-23	s DIODE DA204U
D302	8-719-023-69	s DIODE SB007T03Q
D400	8-719-023-69	s DIODE SB007T03Q
D401	8-719-023-69	s DIODE SB007T03Q
D402	8-719-023-69	s DIODE SB007T03Q
D500	8-719-023-69	s DIODE SB007T03Q
D501	8-719-023-69	s DIODE SB007T03Q
D503	8-719-941-23	s DIODE DA204U
D505	8-719-941-23	s DIODE DA204U
D506	8-719-941-23	s DIODE DA204U
D700	8-719-941-23	s DIODE DA204U
D701	8-719-941-23	s DIODE DA204U
D702	8-719-941-23	s DIODE DA204U
D703	8-719-023-69	s DIODE SB007T03Q
FB300	1-543-309-21	s BEAD, FERRITE
FB301	1-543-309-21	s BEAD, FERRITE
FB500	1-543-309-21	s BEAD, FERRITE
FB501	1-543-309-21	s BEAD, FERRITE
FB502	1-543-309-21	s BEAD, FERRITE
FB503	1-543-309-21	s BEAD, FERRITE
FB700	1-543-309-21	s BEAD, FERRITE

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
FB701	1-543-309-21	s BEAD, FERRITE
FB702	1-543-309-21	s BEAD, FERRITE
FB703	1-543-309-21	s BEAD, FERRITE
FB705	1-543-309-21	s BEAD, FERRITE
FB706	1-543-309-21	s BEAD, FERRITE
FB707	1-543-309-21	s BEAD, FERRITE
FB708	1-543-309-21	s BEAD, FERRITE
FB709	1-543-309-21	s BEAD, FERRITE
FB710	1-543-309-21	s BEAD, FERRITE
FB711	1-543-309-21	s BEAD, FERRITE
FB712	1-543-309-21	s BEAD, FERRITE
FB713	1-543-309-21	s BEAD, FERRITE
FB714	1-543-309-21	s BEAD, FERRITE
FB715	1-543-309-21	s BEAD, FERRITE
FB716	1-543-309-21	s BEAD, FERRITE
FB717	1-543-309-21	s BEAD, FERRITE
FB726	1-543-309-21	s BEAD, FERRITE
FB727	1-543-309-21	s BEAD, FERRITE
FB728	1-543-309-21	s BEAD, FERRITE
FB729	1-543-309-21	s BEAD, FERRITE
FB730	1-543-309-21	s BEAD, FERRITE
FB732	1-543-309-21	s BEAD, FERRITE
FB733	1-543-309-21	s BEAD, FERRITE
FL300	1-239-719-11	s FILTER, EMI, CHIP (3225)
FL301	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL302	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL303	1-239-719-11	s FILTER, EMI, CHIP (3225)
FL304	1-239-719-11	s FILTER, EMI, CHIP (3225)
FL316	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL317	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL400	1-239-721-11	s FILTER, LOW-PASS
FL401	1-239-721-11	s FILTER, LOW-PASS
FL402	1-239-721-11	s FILTER, LOW-PASS
FL403	1-239-721-11	s FILTER, LOW-PASS
FL404	1-239-721-11	s FILTER, LOW-PASS
FL701	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL702	1-239-898-22	s FILTER, EMI, CHIP (2012)
FL703	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL704	1-239-898-22	s FILTER, EMI, CHIP (2012)
FL705	1-239-898-22	s FILTER, EMI, CHIP (2012)
FL706	1-239-898-22	s FILTER, EMI, CHIP (2012)
FL707	1-239-898-22	s FILTER, EMI, CHIP (2012)
FL719	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL720	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL724	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL731	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL790	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
FL791	1-233-674-11	s FERRITE ARRAY, CHIP (8020)
IC100	8-759-543-66	s IC SN74LVTH245ANSR
IC110	8-759-386-29	s IC 74LCX574SJ
IC111	8-759-386-29	s IC 74LCX574SJ
IC118	8-759-375-04	s IC CXD8985AQ
IC119	8-759-386-32	s IC 74LCX245SJ
IC120	8-759-386-32	s IC 74LCX245SJ
IC121	8-759-386-32	s IC 74LCX245SJ
IC122	8-759-386-32	s IC 74LCX245SJ
IC123	8-759-386-32	s IC 74LCX245SJ
IC124	8-759-386-32	s IC 74LCX245SJ

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP	Description
IC125	8-759-386-32	s	IC 74LCX245SJ
IC126	8-759-386-32	s	IC 74LCX245SJ
IC127	8-759-386-32	s	IC 74LCX245SJ
IC128	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC129	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC130	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC131	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC132	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC133	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC134	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC135	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC136	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC137	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC138	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC139	8-759-557-59	s	IC UPD4516821AG5-A10B-9NF
IC180	8-759-386-26	s	IC 74LCX574MTC
IC181	8-759-386-26	s	IC 74LCX574MTC
IC190	8-759-543-66	s	IC SN74LVTH245ANSR
IC300	8-759-247-03	s	IC CXD8810BQ
IC303	8-759-082-57	s	IC TC7W04FU
IC304	8-759-542-87	s	IC S-80827ANUP-EDQ
IC305	8-759-184-64	s	IC TC4W66FU
IC306	8-759-454-75	s	IC CXD9008Q
IC307	8-759-082-57	s	IC TC7W04FU
IC308	8-759-295-09	s	IC TLC2932IPW
IC309	8-759-389-68	s	IC 74VHCT04MTC
IC310	8-759-386-32	s	IC 74LCX245SJ
IC311	8-759-386-25	s	IC 74LCX245MTC
IC312	8-759-234-77	s	IC TC4S66F
IC313	8-759-386-25	s	IC 74LCX245MTC
IC314	8-759-485-82	s	IC MC34182D
IC315	8-759-260-53	s	IC LM2903PW
IC316	8-759-058-58	s	IC TC7S04FU
IC317	8-759-390-07	s	IC CXD8997R
IC318	8-759-175-27	s	IC TC74VHC574F
IC319	8-759-651-60	s	IC SN74LVTH125PWR
IC320	8-759-035-93	s	IC SC7S32F
IC321	8-759-175-27	s	IC TC74VHC574F
IC322	8-759-082-57	s	IC TC7W04FU
IC323	8-759-925-76	s	IC SN74HC08ANS
IC324	8-759-175-27	s	IC TC74VHC574F
IC325	8-759-175-27	s	IC TC74VHC574F
IC326	8-759-386-25	s	IC 74LCX245MTC
IC327	8-759-186-39	s	IC TC74VHC74F
IC328	8-759-052-52	s	IC L78M05T-FA
IC329	8-759-184-64	s	IC TC4W66FU
IC330	8-759-386-25	s	IC 74LCX245MTC
IC350	8-759-524-28	s	IC TC74VHC245FT(EL)
IC351	8-759-524-28	s	IC TC74VHC245FT(EL)
IC352	8-759-524-28	s	IC TC74VHC245FT(EL)
IC353	8-759-524-28	s	IC TC74VHC245FT(EL)
IC356	8-759-523-94	s	IC TC74VHC32FT(EL)
IC357	8-759-491-46	s	IC TC74VHCT04AFT
IC358	8-759-523-95	s	IC TC74VHC74FT(EL)
IC359	8-759-523-95	s	IC TC74VHC74FT(EL)
IC360	8-759-523-94	s	IC TC74VHC32FT(EL)
IC361	8-759-523-96	s	IC TC74VHC86FT(EL)
IC362	8-759-547-51	s	IC TC551402J-25
IC363	8-759-547-51	s	IC TC551402J-25

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP	Description
IC364	8-759-547-51	s	IC TC551402J-25
IC365	8-759-547-51	s	IC TC551402J-25
IC366	8-759-523-81	s	IC TC74VHC08FT(EL)
IC370	8-759-524-18	s	IC TC74VHC163FT(EL)
IC371	8-759-524-18	s	IC TC74VHC163FT(EL)
IC372	8-759-524-18	s	IC TC74VHC163FT(EL)
IC373	8-759-524-18	s	IC TC74VHC163FT(EL)
IC374	8-759-524-18	s	IC TC74VHC163FT(EL)
IC375	8-759-524-18	s	IC TC74VHC163FT(EL)
IC390	8-759-184-64	s	IC TC4W66FU
IC391	8-759-175-27	s	IC TC74VHC574F
IC392	8-759-175-27	s	IC TC74VHC574F
IC393	8-759-524-52	s	IC TC74VHC574FT(EL)
IC394	8-759-234-20	s	IC TC7S08F
IC395	8-759-523-94	s	IC TC74VHC32FT(EL)
IC397	8-759-058-58	s	IC TC7S04FU
IC400	8-759-929-26	s	IC TL431CPS
IC401	8-759-052-52	s	IC L78M05T-FA
IC403	8-752-357-63	s	IC CXD2308Q
IC404	8-759-822-95	s	IC L79M05T-FA
IC405	8-759-907-81	s	IC SN74LS221NS
IC406	8-759-271-04	s	IC LT1252CS8
IC407	8-759-271-04	s	IC LT1252CS8
IC408	8-759-271-04	s	IC LT1252CS8
IC409	8-759-485-82	s	IC MC34182D
IC410	8-759-485-82	s	IC MC34182D
IC411	8-759-485-82	s	IC MC34182D
IC412	8-759-082-61	s	IC TC4W53FU
IC413	8-759-082-61	s	IC TC4W53FU
IC414	8-759-082-61	s	IC TC4W53FU
IC415	8-759-392-64	s	IC AD828AR
IC416	8-759-392-64	s	IC AD828AR
IC417	8-759-052-52	s	IC L78M05T-FA
IC418	8-759-929-26	s	IC TL431CPS
IC420	8-752-357-63	s	IC CXD2308Q
IC421	8-759-822-95	s	IC L79M05T-FA
IC422	8-759-082-58	s	IC TC7W08FU
IC423	8-759-271-04	s	IC LT1252CS8
IC424	8-759-271-04	s	IC LT1252CS8
IC425	8-759-485-82	s	IC MC34182D
IC426	8-759-485-82	s	IC MC34182D
IC427	8-759-082-61	s	IC TC4W53FU
IC428	8-759-082-61	s	IC TC4W53FU
IC429	8-752-052-77	s	IC CXA1450M
IC430	8-759-392-64	s	IC AD828AR
IC500	8-759-052-52	s	IC L78M05T-FA
IC501	8-759-822-95	s	IC L79M05T-FA
IC502	8-759-234-08	s	IC TA78L05F
IC503	8-759-446-74	s	IC TA79L05F
IC504	8-759-195-81	s	IC TC7S86FU
IC505	8-759-485-83	s	IC MC34184DR2
IC506	8-759-009-07	s	IC MC14053BF
IC507	8-759-987-27	s	IC LM1881M
IC508	8-759-239-58	s	IC TC74HC221AF
IC509	8-759-295-09	s	IC TLC2932IPW
IC510	8-759-485-82	s	IC MC34182D
IC511	8-759-262-03	s	IC MC14577CF
IC512	8-759-260-53	s	IC LM2903PW
IC513	8-759-242-68	s	IC TC7W32F

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
IC514	8-759-702-08	s IC NJM360M
IC516	8-759-082-61	s IC TC4W53FU
IC517	8-759-082-57	s IC TC7W04FU
IC518	8-759-925-79	s IC SN74HC11ANS
IC519	8-759-184-64	s IC TC4W66FU
IC520	8-759-260-53	s IC LM2903PW
IC521	8-759-907-81	s IC SN74LS221NS
IC522	8-759-702-08	s IC NJM360M
IC523	8-759-175-66	s IC CXD8817Q
IC524	8-759-485-82	s IC MC34182D
IC525	8-759-907-81	s IC SN74LS221NS
IC526	8-759-082-57	s IC TC7W04FU
IC527	8-759-082-57	s IC TC7W04FU
IC528	8-759-186-63	s IC TC74VHC245F
IC529	8-759-081-48	s IC TC74VHC08F
IC530	8-759-240-87	s IC TC74HCT157AF
IC531	8-759-240-87	s IC TC74HCT157AF
IC532	8-759-081-44	s IC TC74VHC04F
IC533	8-759-269-09	s IC SN74HCT04ANS
IC534	8-759-239-55	s IC TC74HC123AF
IC535	8-759-035-93	s IC SC7S32F
IC590	8-759-184-64	s IC TC4W66FU
IC690	8-729-046-85	s TRANSISTOR SI9945AEY
IC691	8-759-485-82	s IC MC34182D
IC692	8-759-009-07	s IC MC14053BF
IC693	8-729-040-75	s TRANSISTOR SI4953DY
IC700	8-759-082-58	s IC TC7W08FU
IC701	8-752-334-64	s IC CXD1171M
IC702	8-759-926-15	s IC SN74HC151ANS
IC703	8-759-082-57	s IC TC7W04FU
IC704	8-759-926-23	s IC SN74HC163ANS
IC705	8-759-702-08	s IC NJM360M
IC706	8-759-186-39	s IC TC74VHC74F
IC707	8-759-295-09	s IC TLC2932IPW
IC708	8-752-334-64	s IC CXD1171M
IC709	8-759-389-68	s IC 74VHCT04MTC
IC710	8-759-485-82	s IC MC34182D
IC711	8-759-702-08	s IC NJM360M
IC712	8-759-926-15	s IC SN74HC151ANS
IC713	8-759-907-81	s IC SN74LS221NS
IC714	8-759-175-65	s IC CXD8821Q
IC715	8-759-262-03	s IC MC14577CF
IC716	8-759-009-07	s IC MC14053BF
IC717	8-759-386-25	s IC 74LCX245MTC
IC718	8-759-485-83	s IC MC34184DR2
IC719	8-759-386-32	s IC 74LCX245SJ
IC720	8-759-082-57	s IC TC7W04FU
IC721	8-759-260-53	s IC LM2903PW
IC722	8-759-386-25	s IC 74LCX245MTC
IC723	8-759-925-76	s IC SN74HC08ANS
IC724	8-759-386-25	s IC 74LCX245MTC
IC725	8-759-058-58	s IC TC7S04FU
IC726	8-759-260-53	s IC LM2903PW
IC727	8-759-925-85	s IC SN74HC32ANS
IC728	8-759-524-28	s IC TC74VHC245FT(EL)
IC729	8-759-234-77	s IC TC4S66F
IC730	8-759-081-44	s IC TC74VHC04F
IC731	8-759-386-25	s IC 74LCX245MTC
IC732	8-759-234-77	s IC TC4S66F

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
IC733	8-759-986-32	s IC 74ACT244SJ
IC734	8-759-386-25	s IC 74LCX245MTC
IC735	8-759-386-32	s IC 74LCX245SJ
IC736	8-759-081-42	s IC TC74VHC00F
IC737	8-759-081-42	s IC TC74VHC00F
IC738	8-759-081-42	s IC TC74VHC00F
IC740	8-759-386-32	s IC 74LCX245SJ
IC742	8-759-386-32	s IC 74LCX245SJ
IC743	8-759-386-32	s IC 74LCX245SJ
IC744	8-759-543-66	s IC SN74LVTH245ANSR
IC790	8-759-386-25	s IC 74LCX245MTC
IC791	8-759-386-25	s IC 74LCX245MTC
IC890	8-759-523-81	s IC TC74VHC08FT(EL)
IC900	8-759-391-30	s IC 74LVX3245QSC
IC901	8-759-186-63	s IC TC74VHC245F
IC902	8-759-391-30	s IC 74LVX3245QSC
IC903	8-759-391-30	s IC 74LVX3245QSC
IC904	8-759-154-60	s IC UPD71055GB-10-3B4
IC905	8-759-154-60	s IC UPD71055GB-10-3B4
IC906	8-759-186-47	s IC TC74VHC138F
IC907	8-759-081-44	s IC TC74VHC04F
IC908	8-759-081-44	s IC TC74VHC04F
IC909	8-759-251-40	s IC MB88E346PFV-G-BND-ER
IC910	8-759-389-68	s IC 74VHCT04MTC
IC914	8-759-081-44	s IC TC74VHC04F
IC916	8-759-277-63	s IC TC7W14FU
IC922	8-759-386-32	s IC 74LCX245SJ
IC923	8-759-186-63	s IC TC74VHC245F
L100	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L190	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L300	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L301	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L302	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L303	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L304	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L305	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L306	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L307	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L400	1-412-164-11	s INDUCTOR, CHIP 0.12uH (3225)
L401	1-412-191-11	s INDUCTOR, CHIP 47uH (3225)
L402	1-412-191-11	s INDUCTOR, CHIP 47uH (3225)
L403	1-412-193-11	s INDUCTOR, CHIP 68uH (3225)
L404	1-412-137-11	s INDUCTOR, CHIP 10uH (3225)
L405	1-412-137-11	s INDUCTOR, CHIP 10uH (3225)
L406	1-412-164-11	s INDUCTOR, CHIP 0.12uH (3225)
L407	1-412-164-11	s INDUCTOR, CHIP 0.12uH (3225)
L408	1-412-193-11	s INDUCTOR, CHIP 68uH (3225)
L409	1-412-193-11	s INDUCTOR, CHIP 68uH (3225)
L410	1-412-190-11	s INDUCTOR, CHIP 33uH (3225)
L411	1-424-641-11	s COIL, CHOKE 22uH
L412	1-409-579-11	s COIL, CHOKE 8.2uH
L413	1-409-579-11	s COIL, CHOKE 8.2uH
L414	1-409-579-11	s COIL, CHOKE 8.2uH
L500	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L501	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L502	1-412-138-11	s INDUCTOR, CHIP 100uH (3225)
L503	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L504	1-412-188-11	s INDUCTOR, CHIP 22uH (3225)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
L505	1-412-143-11	s INDUCTOR, CHIP 39uH (3225)
L506	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L507	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L690	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L693	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L696	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L700	1-410-381-11	s INDUCTOR, CHIP 10uH (3225)
L701	1-410-381-11	s INDUCTOR, CHIP 10uH (3225)
L702	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L703	1-412-191-11	s INDUCTOR, CHIP 47uH (3225)
L704	1-412-191-11	s INDUCTOR, CHIP 47uH (3225)
L705	1-412-191-11	s INDUCTOR, CHIP 47uH (3225)
L706	1-412-191-11	s INDUCTOR, CHIP 47uH (3225)
L707	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L708	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L709	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L710	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L711	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L712	1-410-393-11	s INDUCTOR, CHIP 100uH (3225)
L713	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L714	1-410-803-11	s INDUCTOR, CHIP 0.047uH (3225)
L900	1-424-641-11	s COIL, CHOKE 22uH
L901	1-409-579-11	s COIL, CHOKE 8.2uH
L902	1-409-579-11	s COIL, CHOKE 8.2uH
L903	1-424-641-11	s COIL, CHOKE 22uH
L904	1-424-641-11	s COIL, CHOKE 22uH
PS900	▲ 1-533-275-21	s FUSE, CHIP 5A 125V
Q400	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q401	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q402	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q403	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q404	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q500	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q501	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q502	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q503	8-729-029-14	s TRANSISTOR DTC144EUA
Q504	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q505	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q506	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q507	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q508	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q509	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q690	8-729-028-91	s TRANSISTOR DTA144EUA
Q691	8-729-028-91	s TRANSISTOR DTA144EUA
Q700	8-729-117-32	s TRANSISTOR 2SC4177-L6
Q701	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
R100	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R101	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R102	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R103	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R104	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R105	1-216-295-00	s METAL, CHIP 0 (2012)
R106	1-216-295-00	s METAL, CHIP 0 (2012)
R107	1-216-295-00	s METAL, CHIP 0 (2012)
R108	1-216-295-00	s METAL, CHIP 0 (2012)
R109	1-216-295-00	s METAL, CHIP 0 (2012)
R110	1-216-295-00	s METAL, CHIP 0 (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
R111	1-216-295-00	s METAL, CHIP 0 (2012)
R112	1-216-295-00	s METAL, CHIP 0 (2012)
R113	1-216-295-00	s METAL, CHIP 0 (2012)
R114	1-216-295-00	s METAL, CHIP 0 (2012)
R115	1-216-295-00	s METAL, CHIP 0 (2012)
R116	1-216-295-00	s METAL, CHIP 0 (2012)
R117	1-216-295-00	s METAL, CHIP 0 (2012)
R118	1-216-295-00	s METAL, CHIP 0 (2012)
R119	1-216-295-00	s METAL, CHIP 0 (2012)
R120	1-216-295-00	s METAL, CHIP 0 (2012)
R121	1-216-295-00	s METAL, CHIP 0 (2012)
R122	1-216-295-00	s METAL, CHIP 0 (2012)
R123	1-216-295-00	s METAL, CHIP 0 (2012)
R124	1-216-295-00	s METAL, CHIP 0 (2012)
R125	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R126	1-216-075-00	s METAL, CHIP 12K 5% 1/10W (2012)
R127	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R128	1-216-075-00	s METAL, CHIP 12K 5% 1/10W (2012)
R129	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R130	1-216-075-00	s METAL, CHIP 12K 5% 1/10W (2012)
R131	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R132	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R133	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R134	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R135	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R136	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R137	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R138	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R139	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R140	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R141	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R142	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R143	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R144	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R145	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R146	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R147	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R148	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R149	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R150	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R151	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R152	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R153	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R154	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R155	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R156	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R157	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R181	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R182	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R183	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R184	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R190	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R194	1-216-295-00	s METAL, CHIP 0 (2012)
R302	1-216-295-00	s METAL, CHIP 0 (2012)
R308	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R309	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R310	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R314	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R315	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
R316	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R317	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R318	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R319	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R320	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R321	1-216-295-00	s METAL, CHIP 0 (2012)
R322	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R323	1-216-295-00	s METAL, CHIP 0 (2012)
R324	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R325	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R326	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R327	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R328	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R329	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R330	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R331	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R332	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R333	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R334	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R335	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R336	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R337	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R338	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R339	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R340	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R341	1-216-681-11	s METAL, CHIP 18K 0.5% 1/10W (2012)
R342	1-216-671-11	s METAL, CHIP 6.8K 0.5% 1/10W (2012)
R343	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R344	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R345	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R346	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R347	1-216-295-00	s METAL, CHIP 0 (2012)
R349	1-216-113-00	s METAL, CHIP 470K 5% 1/10W (2012)
R350	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R351	1-216-295-00	s METAL, CHIP 0 (2012)
R352	1-216-298-00	s METAL, CHIP 2.2 5% 1/10W (2012)
R354	1-216-295-00	s METAL, CHIP 0 (2012)
R355	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R356	1-216-295-00	s METAL, CHIP 0 (2012)
R357	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R358	1-216-295-00	s METAL, CHIP 0 (2012)
R370	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R371	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R390	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R391	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R392	1-216-295-00	s METAL, CHIP 0 (2012)
R394	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R400	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R401	1-216-680-11	s METAL, CHIP 16K 0.5% 1/10W (2012)
R402	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R403	1-216-696-11	s METAL, CHIP 75K 0.5% 1/10W (2012)
R404	1-216-680-11	s METAL, CHIP 16K 0.5% 1/10W (2012)
R405	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R406	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R407	1-216-678-11	s METAL, CHIP 13K 0.5% 1/10W (2012)
R408	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R409	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R410	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R411	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
R412	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R413	1-216-657-11	s METAL, CHIP 1.8K 0.5% 1/10W (2012)
R414	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R415	1-216-657-11	s METAL, CHIP 1.8K 0.5% 1/10W (2012)
R416	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R417	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R418	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R419	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R420	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R421	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R422	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R423	1-216-613-11	s METAL, CHIP 27 0.5% 1/10W (2012)
R424	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R425	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R426	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R427	1-216-658-11	s METAL, CHIP 2.0K 0.5% 1/10W (2012)
R428	1-216-658-11	s METAL, CHIP 2.0K 0.5% 1/10W (2012)
R429	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R430	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R431	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R432	1-216-685-11	s METAL, CHIP 27K 0.5% 1/10W (2012)
R433	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R434	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R435	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R436	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R437	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R438	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R439	1-216-686-11	s METAL, CHIP 30K 0.5% 1/10W (2012)
R440	1-216-689-11	s METAL, CHIP 39K 0.5% 1/10W (2012)
R441	1-216-689-11	s METAL, CHIP 39K 0.5% 1/10W (2012)
R442	1-216-662-11	s METAL, CHIP 3.0K 0.5% 1/10W (2012)
R443	1-216-662-11	s METAL, CHIP 3.0K 0.5% 1/10W (2012)
R444	1-216-662-11	s METAL, CHIP 3.0K 0.5% 1/10W (2012)
R445	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R446	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R447	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R448	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R450	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R451	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R452	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R453	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R454	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R455	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R456	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R457	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R458	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R459	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R460	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R461	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R462	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R463	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R464	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R465	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R466	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R467	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R468	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R469	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R470	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R471	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
R472	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R473	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R474	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R475	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R476	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R477	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R478	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R479	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R480	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R481	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R500	1-216-298-00	s METAL, CHIP 2.2 5% 1/10W (2012)
R504	1-216-688-11	s METAL, CHIP 36K 0.5% 1/10W (2012)
R505	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R506	1-216-051-00	s METAL, CHIP 1.2K 5% 1/10W (2012)
R507	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R508	1-216-649-11	s METAL, CHIP 820 0.5% 1/10W (2012)
R509	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R510	1-216-689-11	s METAL, CHIP 39K 0.5% 1/10W (2012)
R511	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R512	1-216-677-11	s METAL, CHIP 12K 0.5% 1/10W (2012)
R513	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R514	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R515	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R516	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R517	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R518	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R519	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R521	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R522	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R523	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R524	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R525	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R526	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R527	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R528	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R529	1-216-093-00	s METAL, CHIP 68K 5% 1/10W (2012)
R530	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R531	1-216-083-00	s METAL, CHIP 27K 5% 1/10W (2012)
R532	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R533	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R534	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R535	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R536	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R537	1-216-295-00	s METAL, CHIP 0 (2012)
R538	1-216-298-00	s METAL, CHIP 2.2 5% 1/10W (2012)
R539	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R540	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R541	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R542	1-216-673-11	s METAL, CHIP 8.2K 0.5% 1/10W (2012)
R543	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R544	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R545	1-216-671-11	s METAL, CHIP 6.8K 0.5% 1/10W (2012)
R546	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R547	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R548	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R549	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R550	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R551	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R552	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
R553	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R554	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R555	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R557	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R558	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R559	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R560	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R561	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R562	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R563	1-216-057-00	s METAL, CHIP 2.2K 5% 1/10W (2012)
R564	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R565	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R567	1-216-051-00	s METAL, CHIP 1.2K 5% 1/10W (2012)
R568	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R569	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R570	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R571	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R572	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R573	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R574	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R575	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R576	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R577	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R578	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R579	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R580	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R581	1-216-699-11	s METAL, CHIP 100K 0.5% 1/10W (2012)
R582	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R583	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R584	1-216-693-11	s METAL, CHIP 56K 0.5% 1/10W (2012)
R585	1-216-295-00	s METAL, CHIP 0 (2012)
R586	1-216-697-11	s METAL, CHIP 82K 0.5% 1/10W (2012)
R587	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R588	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R589	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R590	1-216-085-00	s METAL, CHIP 33K 5% 1/10W (2012)
R591	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R592	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R593	1-216-113-00	s METAL, CHIP 470K 5% 1/10W (2012)
R594	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R595	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R596	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R597	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R598	1-216-693-11	s METAL, CHIP 56K 0.5% 1/10W (2012)
R599	1-216-295-00	s METAL, CHIP 0 (2012)
R600	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R601	1-216-295-00	s METAL, CHIP 0 (2012)
R602	1-216-295-00	s METAL, CHIP 0 (2012)
R603	1-216-295-00	s METAL, CHIP 0 (2012)
R604	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R605	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R606	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R607	1-216-295-00	s METAL, CHIP 0 (2012)
R608	1-216-295-00	s METAL, CHIP 0 (2012)
R609	1-216-295-00	s METAL, CHIP 0 (2012)
R610	1-216-295-00	s METAL, CHIP 0 (2012)
R611	1-216-295-00	s METAL, CHIP 0 (2012)
R612	1-216-295-00	s METAL, CHIP 0 (2012)
R614	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
R615	1-216-113-00	s METAL, CHIP 470K 5% 1/10W (2012)
R616	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R617	1-216-682-11	s METAL, CHIP 20K 0.5% 1/10W (2012)
R618	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R619	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R620	1-216-295-00	s METAL, CHIP 0 (2012)
R621	1-216-295-00	s METAL, CHIP 0 (2012)
R622	1-216-295-00	s METAL, CHIP 0 (2012)
R623	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R691	1-216-085-00	s METAL, CHIP 33K 5% 1/10W (2012)
R692	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R693	1-216-085-00	s METAL, CHIP 33K 5% 1/10W (2012)
R694	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R695	1-216-295-00	s METAL, CHIP 0 (2012)
R696	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R697	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R700	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R701	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R702	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R703	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R704	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R705	1-216-671-11	s METAL, CHIP 6.8K 0.5% 1/10W (2012)
R706	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R707	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R708	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R709	1-216-685-11	s METAL, CHIP 27K 0.5% 1/10W (2012)
R710	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R711	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R712	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R713	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R714	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R715	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R716	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R717	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R718	1-216-671-11	s METAL, CHIP 6.8K 0.5% 1/10W (2012)
R719	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R720	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R721	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R722	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R723	1-216-685-11	s METAL, CHIP 27K 0.5% 1/10W (2012)
R724	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R725	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R726	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R727	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R728	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R729	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R730	1-216-697-11	s METAL, CHIP 82K 0.5% 1/10W (2012)
R731	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R732	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R733	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R734	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R735	1-216-685-11	s METAL, CHIP 27K 0.5% 1/10W (2012)
R736	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R737	1-216-672-11	s METAL, CHIP 7.5K 0.5% 1/10W (2012)
R738	1-216-671-11	s METAL, CHIP 6.8K 0.5% 1/10W (2012)
R739	1-216-678-11	s METAL, CHIP 13K 0.5% 1/10W (2012)
R740	1-216-689-11	s METAL, CHIP 39K 0.5% 1/10W (2012)
R741	1-216-659-11	s METAL, CHIP 2.2K 0.5% 1/10W (2012)
R742	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
R743	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R744	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R745	1-216-662-11	s METAL, CHIP 3.0K 0.5% 1/10W (2012)
R746	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R747	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R748	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R749	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R750	1-216-662-11	s METAL, CHIP 3.0K 0.5% 1/10W (2012)
R751	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R752	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R753	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R754	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R755	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R756	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R757	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R758	1-216-079-00	s METAL, CHIP 18K 5% 1/10W (2012)
R759	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R760	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R761	1-216-295-00	s METAL, CHIP 0 (2012)
R762	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R763	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R764	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R767	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R768	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R769	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R770	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R771	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R772	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R773	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R775	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R776	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R777	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R778	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R779	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R780	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R781	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R782	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R783	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R784	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R785	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R786	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R787	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R788	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R789	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R791	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R792	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R793	1-216-089-00	s METAL, CHIP 47K 5% 1/10W (2012)
R794	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R795	1-216-121-00	s METAL, CHIP 1.0M 5% 1/10W (2012)
R797	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R798	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R799	1-216-643-11	s METAL, CHIP 470 0.5% 1/10W (2012)
R801	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R802	1-216-295-00	s METAL, CHIP 0 (2012)
R803	1-216-295-00	s METAL, CHIP 0 (2012)
R804	1-216-295-00	s METAL, CHIP 0 (2012)
R805	1-216-295-00	s METAL, CHIP 0 (2012)
R806	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R807	1-216-295-00	s METAL, CHIP 0 (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
R808	1-216-295-00	s METAL, CHIP 0 (2012)
R809	1-216-295-00	s METAL, CHIP 0 (2012)
R810	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R811	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R812	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R813	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R814	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R815	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R816	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R817	1-216-295-00	s METAL, CHIP 0 (2012)
R818	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R819	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R820	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R821	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R890	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R891	1-216-295-00	s METAL, CHIP 0 (2012)
R893	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R894	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R900	1-216-295-00	s METAL, CHIP 0 (2012)
R901	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R903	1-216-097-00	s METAL, CHIP 100K 5% 1/10W (2012)
R904	1-216-295-00	s METAL, CHIP 0 (2012)
R905	1-216-295-00	s METAL, CHIP 0 (2012)
R906	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R907	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R908	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R909	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R910	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R911	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R912	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R913	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R914	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R915	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R916	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R917	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R927	1-216-033-00	s METAL, CHIP 220 5% 1/10W (2012)
R928	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R990	1-216-295-00	s METAL, CHIP 0 (2012)
R1000	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1001	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R1002	1-216-678-11	s METAL, CHIP 13K 0.5% 1/10W (2012)
R1003	1-216-696-11	s METAL, CHIP 75K 0.5% 1/10W (2012)
R1004	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R1005	1-216-696-11	s METAL, CHIP 75K 0.5% 1/10W (2012)
R1006	1-216-679-11	s METAL, CHIP 15K 0.5% 1/10W (2012)
R1007	1-216-678-11	s METAL, CHIP 13K 0.5% 1/10W (2012)
R1008	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R1009	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R1010	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R1011	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R1012	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R1013	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R1014	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R1015	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1016	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R1017	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1018	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R1019	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R1020	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
R1021	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R1022	1-216-670-11	s METAL, CHIP 6.2K 0.5% 1/10W (2012)
R1023	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R1024	1-216-670-11	s METAL, CHIP 6.2K 0.5% 1/10W (2012)
R1025	1-216-666-11	s METAL, CHIP 4.3K 0.5% 1/10W (2012)
R1026	1-216-635-11	s METAL, CHIP 220 0.5% 1/10W (2012)
R1027	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R1028	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R1029	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R1030	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R1031	1-216-613-11	s METAL, CHIP 27 0.5% 1/10W (2012)
R1032	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R1033	1-216-613-11	s METAL, CHIP 27 0.5% 1/10W (2012)
R1034	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R1035	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R1036	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R1037	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R1038	1-216-025-00	s METAL, CHIP 100 5% 1/10W (2012)
R1039	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R1040	1-216-631-11	s METAL, CHIP 150 0.5% 1/10W (2012)
R1041	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R1042	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R1043	1-216-689-11	s METAL, CHIP 39K 0.5% 1/10W (2012)
R1044	1-216-689-11	s METAL, CHIP 39K 0.5% 1/10W (2012)
R1045	1-216-662-11	s METAL, CHIP 3.0K 0.5% 1/10W (2012)
R1046	1-216-662-11	s METAL, CHIP 3.0K 0.5% 1/10W (2012)
R1047	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R1048	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R1049	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R1050	1-216-133-00	s METAL, CHIP 3.3M 5% 1/10W (2012)
R1051	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R1052	1-216-069-00	s METAL, CHIP 6.8K 5% 1/10W (2012)
R1053	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R1054	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R1055	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1056	1-216-653-11	s METAL, CHIP 1.2K 0.5% 1/10W (2012)
R1057	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R1058	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1059	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R1060	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R1061	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R1062	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R1064	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1065	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1066	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1067	1-216-663-11	s METAL, CHIP 3.3K 0.5% 1/10W (2012)
R1068	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R1069	1-216-009-00	s METAL, CHIP 22 5% 1/10W (2012)
R1070	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R1071	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)
R1073	1-216-049-00	s METAL, CHIP 1.0K 5% 1/10W (2012)
R1074	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1075	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R1076	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1077	1-216-017-00	s METAL, CHIP 47 5% 1/10W (2012)
R1078	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R1079	1-216-623-11	s METAL, CHIP 68 0.5% 1/10W (2012)
R1080	1-216-041-00	s METAL, CHIP 470 5% 1/10W (2012)
R1081	1-216-661-11	s METAL, CHIP 2.7K 0.5% 1/10W (2012)

(VPR-47 BOARD for DNW-75P)

Ref. No. or Q'ty	Part No.	SP Description
R1082	1-216-081-00	s METAL, CHIP 22K 5% 1/10W (2012)
R1083	1-216-651-11	s METAL, CHIP 1.0K 0.5% 1/10W (2012)
R1088	1-216-295-00	s METAL, CHIP 0 (2012)
RB100	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB102	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB104	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB190	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB191	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB192	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB300	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB301	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB302	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB303	1-239-306-11	s RES, NETWORK, CHIP 10Kx8 (6432)
RB304	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB305	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB306	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB307	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB308	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB309	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB310	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB311	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB312	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB313	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB314	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB315	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB316	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB317	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB318	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB319	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB320	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB321	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB322	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB323	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB324	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB325	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB326	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB327	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB328	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB329	1-239-412-11	s RES, NETWORK, CHIP 100x4 (3216)
RB500	1-239-628-11	s RES, NETWORK, CHIP 220x8 (6432)
RB700	1-239-303-11	s RES, NETWORK, CHIP 1.0Kx8 (6432)
RB890	1-236-907-11	s RES, NETWORK, CHIP 100Kx4 (3216)
RB900	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB901	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB902	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB903	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB904	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB905	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB906	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB907	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB908	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)
RB909	1-239-309-11	s RES, NETWORK, CHIP 100Kx8 (6432)

VR-223 BOARD

Ref. No. or Q'ty	Part No.	SP Description
*a: LOT No. 804 through 905		
*b: LOT No. 906 and higher		
1pc	A-8319-305-A	o MOUNTED CIRCUIT BOARD, VR-223K
1pc	7-623-510-01	s LUG, 4
1pc	1-543-993-11	s CORE, FERRITE
C1	1-126-948-11	s ELECT 100uF 20% 35V
C2	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C3	1-126-948-11	s ELECT 100uF 20% 35V
C4	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C5	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C6	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C7	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C8	1-124-282-00	s ELECT, NONPOLAR 22uF 20% 25V
C9	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C10	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C11	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C12	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C13	1-126-933-11	s ELECT 100uF 20% 16V
C14	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C15	1-126-933-11	s ELECT 100uF 20% 16V
C16	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C17	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C18	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C19	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C20	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C21	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C22	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
C23	1-163-243-11	s CERAMIC, CHIP 47pF 5% 50V (2012)
CN510	1-506-472-11	s CONNECTOR, 7P, MALE
CN511	1-506-480-11	o CONNECTOR, 15P, MALE
CN512	1-506-473-11	s CONNECTOR, 8P, MALE
D1	8-719-024-81	s DIODE 1SS300
D2	8-719-024-81	s DIODE 1SS300
D3	8-719-024-81	s DIODE 1SS300
D5	8-719-801-48	s DIODE 1SS193
FL1	1-239-825-11	s FILTER, EMI, CHIP (3225)
FL2	1-239-825-11	s FILTER, EMI, CHIP (3225)
FL3	1-239-825-11	s FILTER, EMI, CHIP (3225)
IC1	8-759-745-64	s IC NJM4560M
IC2	8-759-745-64	s IC NJM4560M
IC3	*b 8-759-588-96	s IC NJM5532L-D
	*a 8-759-521-14	s IC NJM5532S-D
IC4	8-759-745-64	s IC NJM4560M
J1	1-507-863-51	s JACK, PHONE
Q1	8-729-028-91	s TRANSISTOR DTA144EUA
Q2	8-729-119-78	s TRANSISTOR 2SC2785-HFE
Q3	8-729-028-91	s TRANSISTOR DTA144EUA
R1	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R2	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R3	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R4	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R5	1-216-667-11	s METAL, CHIP 4.7K 0.5% 1/10W (2012)
R6	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R7	1-216-660-11	s METAL, CHIP 2.4K 0.5% 1/10W (2012)
R8	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R9	1-220-220-11	s METAL, CHIP 120 5% 1/2W (4532)

(VR-223 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R10	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R11	1-216-660-11	s METAL, CHIP 2.4K 0.5% 1/10W (2012)
R12	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R13	1-220-220-11	s METAL, CHIP 120 5% 1/2W (4532)
R14	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R15	1-216-065-00	s METAL, CHIP 4.7K 5% 1/10W (2012)
R16	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R17	1-216-603-11	s METAL, CHIP 10 0.5% 1/10W (2012)
R18	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R19	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R20	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R21	1-216-675-11	s METAL, CHIP 10K 0.5% 1/10W (2012)
R22	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R23	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R26	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R27	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R30	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R31	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R34	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R35	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R38	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R39	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R40	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R41	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
RV1	1-223-536-11	s RES, VAR, CARBON 10K (WITH SW)
RV2	1-223-536-11	s RES, VAR, CARBON 10K (WITH SW)
RV3	1-223-536-11	s RES, VAR, CARBON 10K (WITH SW)
RV4	1-223-536-11	s RES, VAR, CARBON 10K (WITH SW)
RV5	1-241-249-11	s RES, VAR, CARBON 10K (WITH SW)
RV6	1-241-577-11	s RES, VAR, CARBON 20K/20K
RY1	1-515-716-11	s RELAY TQ2-5V

VR-224 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8319-307-A	o MOUNTED CIRCUIT BOARD, VR-224K
C1	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C2	1-126-933-11	s ELECT 100uF 20% 16V
C3	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C4	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C5	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C6	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
C7	1-163-038-00	s CERAMIC, CHIP 0.1uF 25V (2012)
CN520	1-568-084-11	s CONNECTOR, HINGE 30P, FEMALE
CN522	1-506-472-11	s CONNECTOR, 7P, MALE
CN523	1-506-480-11	o CONNECTOR, 15P, MALE
D1	8-719-024-81	s DIODE 1SS300
D2	8-719-024-81	s DIODE 1SS300
Q1	8-729-028-91	s TRANSISTOR DTA144EUA
R1	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R2	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R5	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R6	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R9	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R10	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R13	1-216-665-11	s METAL, CHIP 3.9K 0.5% 1/10W (2012)
R14	1-216-687-11	s METAL, CHIP 33K 0.5% 1/10W (2012)
R21	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R22	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R23	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
R24	1-216-073-00	s METAL, CHIP 10K 5% 1/10W (2012)
RV1	1-223-536-11	s RES, VAR, CARBON 10K (WITH SW)
RV2	1-223-536-11	s RES, VAR, CARBON 10K (WITH SW)
RV3	1-223-536-11	s RES, VAR, CARBON 10K (WITH SW)
RV4	1-223-536-11	s RES, VAR, CARBON 10K (WITH SW)
S1	1-554-088-00	s SWITCH, PUSH

3-5. Power Supply Unit

MAIN1 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	9-884-372-01	o MOUNTED CIRCUIT BOARD, MAIN1
1pc	7-682-548-09	s SCREW +B 3x8
3pcs	7-682-549-09	s SCREW +B 3x10
1pc	9-884-324-01	s NUT
1pc	9-884-325-01	s SHEET, RADIATION
C101	△ 1-104-708-11	s FILM 0.47uF 20% 250V
C102	△ 1-115-166-11	s FILM 0.22uF 20% 275V
C103	△ 9-884-291-01	s CERAMIC 1000pF 20% 250V
C104	△ 9-884-291-01	s CERAMIC 1000pF 20% 250V
C109	△ 9-884-294-01	s FILM 1.0uF 10% 630V
C110	9-884-292-01	s CERAMIC 100pF 10% 1KV
C111	9-884-293-01	s CERAMIC 1000pF 10% 1KV
C112	1-130-471-00	s MYLAR 0.001uF 5% 50V
C113	1-136-165-00	s FILM 0.1uF 5% 50V
C114	9-884-286-01	s ELECT 330uF 20% 450V
C115	9-884-288-01	s ELECT 47uF 20% 50V
C116	9-884-288-01	s ELECT 47uF 20% 50V
C117	9-884-288-01	s ELECT 47uF 20% 50V
C118	9-884-288-01	s ELECT 47uF 20% 50V
C119	9-884-293-01	s CERAMIC 1000pF 10% 1KV
C120	△ 9-884-290-01	s CERAMIC 470pF 10% 250V
C121	△ 9-884-290-01	s CERAMIC 470pF 10% 250V
C124	1-136-169-00	s FILM 0.22uF 5% 50V
CN101	△ 1-564-607-11	o CONNECTOR, VH 6P, MALE
CN102	△ 1-564-241-11	o CONNECTOR, VH 4P, MALE
D101	8-719-500-16	s DIODE D5SB60
D102	8-719-058-53	s DIODE D8L60
D103	8-719-939-79	s DIODE GMA01-BT
D104	8-719-939-79	s DIODE GMA01-BT
D105	8-719-939-79	s DIODE GMA01-BT
D106	9-884-284-01	s DIODE ERA83-004 V3
IC101	8-759-231-58	s IC TA7812S
IC102	9-884-278-01	s HIC D700S
L101	△ 9-884-316-01	s COIL
L102	△ 9-884-316-01	s COIL
L103	△ 9-884-317-01	s COIL
L104	△ 9-884-317-01	s COIL
L105	△ 9-884-318-01	s COIL
L106	△ 9-884-319-01	s FILTER, EMI
Q101	9-884-281-01	s TRANSISTOR 2SK2837
Q102	8-729-039-12	s TRANSISTOR IRFIBC20G
Q103	9-884-282-01	s TRANSISTOR 2SC2785(M)
Q104	8-729-029-66	s TRANSISTOR DTC114ESA
R101	9-884-299-01	s RES, 4.7 5% 5W
R102	9-884-300-01	s RES, 6.8 5% 5W
R103	1-249-469-11	s CARBON 100K 5% 1/4W
R104	1-249-469-11	s CARBON 100K 5% 1/4W
R105	9-884-296-01	s METAL 0.22 5% 2W
R106	9-884-296-01	s METAL 0.22 5% 2W
R107	9-884-298-01	s METAL 0.05 5% 2W
R108	9-884-295-01	s METAL 0.1 5% 2W
R109	9-884-297-01	s METAL 0.47 5% 2W
R110	9-884-312-01	s METAL 10 5% 2W
R111	9-884-313-01	s CARBON 100K 5% 2W
R112	9-884-313-01	s CARBON 100K 5% 2W
R113	9-884-302-01	s CARBON 220 5% 1/4W

(MAIN1 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R114	9-884-303-01	s RES, FUSIBLE 33 5% 1/4W
R115	1-247-883-00	s CARBON 150K 5% 1/4W
R116	1-247-883-00	s CARBON 150K 5% 1/4W
R117	1-247-883-00	s CARBON 150K 5% 1/4W
R118	1-247-889-00	s CARBON 270K 5% 1/4W
R119	1-247-889-00	s CARBON 270K 5% 1/4W
R120	1-247-889-00	s CARBON 270K 5% 1/4W
R121	1-247-863-11	s CARBON 22K 5% 1/4W
R122	1-249-417-11	s CARBON 1.0K 5% 1/4W
R123	1-247-863-11	s CARBON 22K 5% 1/4W
R124	9-884-310-01	s METAL 560 1% 1/4W
R125	9-884-309-01	s METAL 100K 1% 1/4W
R126	9-884-309-01	s METAL 100K 1% 1/4W
R127	9-884-309-01	s METAL 100K 1% 1/4W
R128	9-884-309-01	s METAL 100K 1% 1/4W
R129	9-884-305-01	s METAL 5.6K 1% 1/4W
R130	1-249-438-11	s CARBON 56K 5% 1/4W
R131	1-249-438-11	s CARBON 56K 5% 1/4W
R132	1-249-438-11	s CARBON 56K 5% 1/4W
R133	1-249-438-11	s CARBON 56K 5% 1/4W
R134	1-249-428-11	s CARBON 8.2K 5% 1/4W
R135	1-249-440-11	s CARBON 82K 5% 1/4W
R136	1-249-437-11	s CARBON 47K 5% 1/4W
R144	9-884-295-01	s METAL 0.1 5% 2W
RY101	△ 9-884-320-01	s RELAY
TH101	9-884-321-01	s THERMISTOR
ZD101	8-719-931-44	s DIODE HZS24NB2TD
ZD102	8-719-930-96	s DIODE HZS16NB1TD

MAIN2 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	7-682-148-09	s SCREW +P 3x8
12pcs	7-682-549-09	s SCREW +B 3x10
1pc	9-884-325-01	s SHEET, RADIATION
C201	9-884-340-01	s FILM 0.47uF 10% 630V
C202	9-884-339-01	s FILM 0.022uF 10% 630V
C203	9-884-339-01	s FILM 0.022uF 10% 630V
C204	9-884-336-01	s CERAMIC 220pF 10% 2KV
C205	9-884-336-01	s CERAMIC 220pF 10% 2KV
C206	9-884-336-01	s CERAMIC 220pF 10% 2KV
C208	9-884-335-01	s ELECT 100uF 20% 50V
C209	9-884-288-01	s ELECT 47uF 20% 50V
C214	9-884-338-01	s FILM 0.1uF 10% 630V
C251	9-884-337-01	s CERAMIC 470pF 10% 1KV
C252	9-884-337-01	s CERAMIC 470pF 10% 1KV
C253	9-884-337-01	s CERAMIC 470pF 10% 1KV
C254	9-884-336-01	s CERAMIC 220pF 10% 2KV
C255	9-884-336-01	s CERAMIC 220pF 10% 2KV
C256	9-884-336-01	s CERAMIC 220pF 10% 2KV
C257	9-884-336-01	s CERAMIC 220pF 10% 2KV
C258	9-884-331-01	s ELECT 1000uF 20% 16V
C259	9-884-334-01	s ELECT 330uF 20% 35V
C260	9-884-332-01	s ELECT 470uF 20% 16V
C261	9-884-332-01	s ELECT 470uF 20% 16V
C262	9-884-334-01	s ELECT 330uF 20% 35V
C263	9-884-332-01	s ELECT 470uF 20% 16V
C264	9-884-332-01	s ELECT 470uF 20% 16V
C265	9-884-334-01	s ELECT 330uF 20% 35V
C266	9-884-331-01	s ELECT 1000uF 20% 16V
C267	9-884-333-01	s ELECT 100uF 20% 25V
C268	9-884-288-01	s ELECT 47uF 20% 50V
C269	9-884-333-01	s ELECT 100uF 20% 25V
C270	9-884-333-01	s ELECT 100uF 20% 25V
C271	9-884-333-01	s ELECT 100uF 20% 25V
C272	9-884-333-01	s ELECT 100uF 20% 25V
C273	9-884-333-01	s ELECT 100uF 20% 25V
C274	9-884-333-01	s ELECT 100uF 20% 25V
C276	9-884-333-01	s ELECT 100uF 20% 25V
C277	1-136-165-00	s FILM 0.1uF 5% 50V
C278	1-136-165-00	s FILM 0.1uF 5% 50V
C279	9-884-331-01	s ELECT 1000uF 20% 16V
C280	9-884-334-01	s ELECT 330uF 20% 35V
C281	9-884-333-01	s ELECT 100uF 20% 25V
C282	9-884-331-01	s ELECT 1000uF 20% 16V
CN1	△ 1-564-241-11	o CONNECTOR, VH 4P, MALE
CN251	1-564-518-11	o CONNECTOR, 3P, MALE
CN252	9-884-315-01	o CONNECTOR, 7P
CN253	1-564-214-11	o CONNECTOR, VH 3P, MALE
CN254	9-884-351-01	o CONNECTOR, 20P
D201	8-719-030-25	s DIODE EG01C-V0
D202	8-719-030-25	s DIODE EG01C-V0
D203	8-719-030-25	s DIODE EG01C-V0
D204	8-719-030-25	s DIODE EG01C-V0
D205	8-719-030-25	s DIODE EG01C-V0
D206	8-719-030-25	s DIODE EG01C-V0
D207	9-884-284-01	s DIODE ERA83-004 V3
D208	9-884-285-01	s DIODE ERA91-02 V3
D209	8-719-939-79	s DIODE GMA01-BT
D210	8-719-939-79	s DIODE GMA01-BT

(MAIN2 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
D251	9-884-329-01	s DIODE ESAC83M-006
D252	9-884-330-01	s DIODE YG902C2R
D253	9-884-329-01	s DIODE ESAC83M-006
D254	9-884-330-01	s DIODE YG902C2R
D255	9-884-330-01	s DIODE YG902C2R
D256	9-884-330-01	s DIODE YG902C2R
D257	9-884-330-01	s DIODE YG902C2R
D258	9-884-330-01	s DIODE YG902C2R
D259	8-719-939-79	s DIODE GMA01-BT
D260	8-719-939-79	s DIODE GMA01-BT
D261	8-719-939-79	s DIODE GMA01-BT
D262	8-719-939-79	s DIODE GMA01-BT
D263	8-719-939-79	s DIODE GMA01-BT
F251	△ 9-884-371-01	s FUSE, MICRO 125V 12A
F252	△ 9-884-371-01	s FUSE, MICRO 125V 12A
IC251	8-759-711-96	s NJM431L
IC252	8-759-711-96	s NJM431L
IC253	8-759-231-58	s IC TA7812S
L201	9-884-352-01	s COIL
L251	9-884-353-01	s COIL
L252	9-884-354-01	s COIL
L253	9-884-355-01	s COIL
L254	9-884-356-01	s COIL
L255	9-884-357-01	s COIL
L256	9-884-357-01	s COIL
L257	9-884-357-01	s COIL
L258	9-884-357-01	s COIL
L259	9-884-357-01	s COIL
L260	9-884-357-01	s COIL
L261	9-884-357-01	s COIL
L262	9-884-358-01	s FERRITE (LARGE)
L263	9-884-358-01	s FERRITE (LARGE)
L264	9-884-358-01	s FERRITE (LARGE)
L265	9-884-358-01	s FERRITE (LARGE)
PC201	8-749-012-18	s PHOTOCOUPLER PC123FY8
PC202	8-749-012-18	s PHOTOCOUPLER PC123FY8
PC203	8-749-012-18	s PHOTOCOUPLER PC123FY8
Q201	8-729-027-82	s TRANSISTOR IRFPE40LF20
Q202	8-729-027-82	s TRANSISTOR IRFPE40LF20
Q203	9-884-327-01	s TRANSISTOR 2SA1175(M)
Q251	9-884-328-01	s TRANSISTOR 2SC3748R
Q252	9-884-327-01	s TRANSISTOR 2SA1175(M)
R201	9-884-313-01	s CARBON 100K 5% 2W
R202	9-884-313-01	s CARBON 100K 5% 2W
R203	1-249-431-11	s CARBON 15K 5% 1/4W
R204	9-884-346-01	s METAL 82K 5% 2W
R205	9-884-346-01	s METAL 82K 5% 2W
R206	9-884-346-01	s METAL 82K 5% 2W
R207	9-884-346-01	s METAL 82K 5% 2W
R208	9-884-312-01	s METAL 10 5% 2W
R209	9-884-312-01	s METAL 10 5% 2W
R210	9-884-348-01	s METAL 0.22 5% 2W
R211	9-884-348-01	s METAL 0.22 5% 2W
R212	1-247-863-11	s CARBON 22K 5% 1/4W
R213	1-247-863-11	s CARBON 22K 5% 1/4W
R214	1-247-692-11	s CARBON 22 5% 1/4W
R215	1-247-692-11	s CARBON 22 5% 1/4W

(MAIN2 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R216	1-247-863-11	s CARBON 22K 5% 1/4W
R217	1-249-405-11	s CARBON 100 5% 1/4W
R218	9-884-342-01	s METAL 270 1% 1/4W
R219	9-884-341-01	s METAL 180 1% 1/4W
R254	9-884-343-01	s METAL 120 5% 2W
R255	9-884-345-01	s METAL 120 5% 2W
R256	9-884-347-01	s METAL 0.1 5% 2W
R257	1-249-417-11	s CARBON 1.0K 5% 1/4W
R258	1-249-413-11	s CARBON 470 5% 1/4W
R259	1-249-417-11	s CARBON 1.0K 5% 1/4W
R260	1-249-421-11	s CARBON 2.2K 5% 1/4W
R261	1-249-422-11	s CARBON 2.7K 5% 1/4W
R263	1-249-417-11	s CARBON 1.0K 5% 1/4W
R264	1-249-413-11	s CARBON 470 5% 1/4W
R265	1-249-417-11	s CARBON 1.0K 5% 1/4W
R266	1-249-419-11	s CARBON 1.5K 5% 1/4W
R267	1-249-425-11	s CARBON 4.7K 5% 1/4W
R268	1-249-437-11	s CARBON 47K 5% 1/4W
R269	1-249-417-11	s CARBON 1.0K 5% 1/4W
R270	1-249-431-11	s CARBON 15K 5% 1/4W
R271	1-249-413-11	s CARBON 470 5% 1/4W
R273	1-247-717-11	s CARBON 2.2K 5% 1/4W
R274	1-247-708-11	s CARBON 470 5% 1/4W
R275	1-247-714-11	s CARBON 1.2K 5% 1/4W
R276	1-249-417-11	s CARBON 1.0K 5% 1/4W
R277	1-249-417-11	s CARBON 1.0K 5% 1/4W
R278	9-884-344-01	s METAL 33 5% 2W
R279	9-884-344-01	s METAL 33 5% 2W
T201	△ 9-884-359-01	s TRANSFORMER
T202	△ 9-884-360-01	s TRANSFORMER
TH201	9-884-361-01	s THERMISTOR
TH251	9-884-361-01	s THERMISTOR
VR251	9-884-349-01	s RES, ADJ, 500
VR252	9-884-349-01	s RES, ADJ, 500
ZD251	8-719-109-89	s DIODE RD5.6ES-B2
ZD252	8-719-982-20	s DIODE MTZJ-30B
ZD253	8-719-110-49	s DIODE RD18ES-B2
ZD254	8-719-110-17	s DIODE RD10ES-B2

SUB201 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C301	1-136-169-00	s FILM 0.22uF 5% 50V
C302	1-130-481-00	s MYLAR 0.0068pF 5% 50V
C303	1-136-169-00	s FILM 0.22uF 5% 50V
C304	1-130-469-00	s MYLAR 680pF 5% 50V
C305	1-130-479-00	s MYLAR 0.0047uF 5% 50V
C306	1-130-483-00	s MYLAR 0.01uF 5% 50V
C307	1-130-483-00	s MYLAR 0.01uF 5% 50V
C308	1-136-169-00	s FILM 0.22uF 5% 50V
C309	9-884-289-01	s CERAMIC 100pF 5% 50V
C310	1-136-169-00	s FILM 0.22uF 5% 50V
C311	1-130-473-00	s MYLAR 0.0015uF 5% 50V
C312	1-136-169-00	s FILM 0.22uF 5% 50V
C313	1-130-469-00	s MYLAR 680pF 5% 50V
C314	1-130-479-00	s MYLAR 0.0047uF 5% 50V
C315	1-130-483-00	s MYLAR 0.01uF 5% 50V
C316	1-130-483-00	s MYLAR 0.01uF 5% 50V
C317	1-136-169-00	s FILM 0.22uF 5% 50V
CN301	9-884-315-01	o CONNECTOR, 7P
CN302	9-884-315-01	o CONNECTOR, 7P
D301	8-719-939-79	s DIODE GMA01-BT
IC301	9-884-279-01	s IC M51995AP
IC301	9-884-279-01	s IC M51995AP
Q301	9-884-282-01	s TRANSISTOR 2SC2785(M)
Q302	9-884-282-01	s TRANSISTOR 2SC2785(M)
R301	9-884-304-01	s METAL 100 1% 1/4W
R302	9-884-307-01	s METAL 12K 1% 1/4W
R303	9-884-307-01	s METAL 12K 1% 1/4W
R304	1-249-417-11	s CARBON 1.0K 5% 1/4W
R305	1-249-431-11	s CARBON 15K 5% 1/4W
R306	1-249-417-11	s CARBON 1.0K 5% 1/4W
R307	1-249-425-11	s CARBON 4.7K 5% 1/4W
R308	1-249-417-11	s CARBON 1.0K 5% 1/4W
R309	1-249-425-11	s CARBON 4.7K 5% 1/4W
R310	9-884-304-01	s METAL 100 1% 1/4W
R311	9-884-308-01	s METAL 22K 1% 1/4W
R312	9-884-306-01	s METAL 11K 1% 1/4W
R313	1-249-417-11	s CARBON 1.0K 5% 1/4W
R314	1-249-431-11	s CARBON 15K 5% 1/4W
R315	1-247-713-11	s CARBON 1.0K 5% 1/4W
R318	1-249-405-11	s CARBON 100 5% 1/4W
R319	9-884-301-01	s CARBON 10 5% 1/4W
R320	9-884-301-01	s CARBON 10 5% 1/4W
R321	1-249-429-11	s CARBON 10K 5% 1/4W

SUB251 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C451	1-136-165-00	s FILM 0.1uF 5% 50V
C452	1-136-165-00	s FILM 0.1uF 5% 50V
C453	1-136-165-00	s FILM 0.1uF 5% 50V
CN401	9-884-315-01	o CONNECTOR, 7P
D451	8-719-939-79	s DIODE GMA01-BT
D452	8-719-939-79	s DIODE GMA01-BT
D453	9-884-285-01	s DIODE ERA91-02 V3
IC451	9-884-280-01	s IC UPC1944J-T
IC452	8-759-700-42	s IC NJM2904D
Q451	8-729-201-32	s TRANSISTOR 2SA1013
Q452	9-884-283-01	s TRANSISTOR 2SD1835-AA
R451	1-249-417-11	s CARBON 1.0K 5% 1/4W
R452	1-249-417-11	s CARBON 1.0K 5% 1/4W
R453	1-249-417-11	s CARBON 1.0K 5% 1/4W
R454	1-249-413-11	s CARBON 470 5% 1/4W
R455	1-247-835-11	s CARBON 1.5K 5% 1/4W
R456	1-249-417-11	s CARBON 1.0K 5% 1/4W
R457	1-249-428-11	s CARBON 8.2K 5% 1/4W
R458	1-249-417-11	s CARBON 1.0K 5% 1/4W
R459	1-247-879-11	s CARBON 100K 5% 1/4W
R460	1-249-417-11	s CARBON 1.0K 5% 1/4W
R461	1-249-417-11	s CARBON 1.0K 5% 1/4W
R462	1-247-718-11	s CARBON 2.7K 5% 1/4W
R463	1-249-417-11	s CARBON 1.0K 5% 1/4W
R464	1-249-417-11	s CARBON 1.0K 5% 1/4W
R465	1-249-417-11	s CARBON 1.0K 5% 1/4W
R466	9-884-311-01	s METAL 4.7 5% 2W
VR451	9-884-314-01	s RES, ADJ, 500
VR452	9-884-314-01	s RES, ADJ, 500

Section 4

Packing Materials and Supplied Accessories List

Q'ty	Part No.	SP Description
1pc	*1Δ -----	CORD, POWER (for J only)
1pc	Δ 1-793-461-11	s CONNECTOR, CONVERSION (3P-2P) (for J only)
1pc	3-181-533-02	o CUSHION (LOWER)
1pc	3-181-534-02	o CUSHION (UPPER)
1pc	3-181-535-01	o SPACER (A)
1pc	3-181-536-01	o SPACER (B)
1pc	3-202-868-01	o INDIVIDUAL CARTON (for DNW-75)
1pc	3-202-869-01	o INDIVIDUAL CARTON (for DNW-75P)
4pcs	7-682-965-01	s SCREW +PSW 4x16

*1: Please order the standard product "DK-2401(J)".

<Note>
 DNW-75(SY) and DNW-75P do not have their power cord as a
 supplied accessory.
 Refer to Section 5.

Section 5

Power Cords List

Q'ty	Part No.	SP Description
------	----------	----------------

<For customers in the U.S.A. and Canada>

1pc	△ 1-557-377-11	s CORD, POWER
1pc	2-990-242-01	s HOLDER (B), PLUG (Black)

<For customers in the United Kingdom>

1pc	△ -----	DK-2401(UK)
1pc	2-990-242-01	s HOLDER (B), PLUG (Black)

Plug holder is included in DK-2401(UK).

<For customers in Europe except the United Kingdom>

1pc	△ -----	DK-2401(AE)
1pc	3-613-640-01	o HOLDER (C), PLUG (Brown)

Plug holder is included in DK-2401(AE).

<Note>
DNW-75(J) has its power cord as a supplied accessory.
Refer to Section 4.

Section 6

Optional Fixtures List

Part No. SP Description

J-6035-070-A o EXTRACTION TOOL (for PLCC socket)
J-6080-029-A o SMALL DENTAL MIRROR (Round type ø12)
J-6086-570-A o REFERENCE FLAT PLATE
J-6152-450-A o WIRE CLEARANCE CHECK GAUGE SET

J-6251-090-A o TORQUE SCREWDRIVER'S HEXAGONAL BIT
(d=2.5 mm, l=120 mm)
J-6323-440-A o TORQUE SCREWDRIVER'S HEXAGONAL BIT
(d=0.89 mm, l=50 mm)

J-6323-420-A o TORQUE SCREWDRIVER'S BIT (+2 mm, l=75 mm)
J-6323-430-A o TORQUE SCREWDRIVER'S BIT (+3 mm, l=90 mm)
J-6252-510-A o TORQUE SCREWDRIVER (6 kg•cm) (0.6 N•m)
J-6252-520-A o TORQUE SCREWDRIVER (12 kg•cm) (1.2 N•m)
A-8277-211-A o EXTENSION BOARD (L), EX-555

A-8277-212-A o EXTENSION BOARD (S), EX-556
J-6320-870-A o REEL MOTOR SHAFT SLANTNESS CHECK FIXTURE
J-6320-880-A o CASSETTE REFERENCE PLATE (L)
J-6322-610-A o TAPE GUIDE ADJUSTMENT DRIVER
J-6329-350-A o REEL TABLE HEIGHT GAUGE

A-8321-333-A o POWER CABLE ASSEMBLY
3-184-527-01 o CLEANING CLOTH (15 cm x 15 cm)
7-432-114-11 o LOCKING COMPOUND, 1401B (200 g)
7-651-000-10 o SONY GREASE, SGL-601 (50 g)
7-661-018-18 o DIAMOND OIL, NT-68 (50 ml)

7-700-736-01 o L-SHAPED HEXAGONAL WRENCH (d=1.27 mm)
7-700-736-04 o L-SHAPED HEXAGONAL WRENCH (d=2.5 mm)
7-700-736-05 o L-SHAPED HEXAGONAL WRENCH (d=1.5 mm)
7-700-736-06 o L-SHAPED HEXAGONAL WRENCH (d=0.89 mm)
7-700-766-04 o HEXAGONAL WRENCH DRIVER (d=2.5 mm)

8-960-075-01 o ALIGNMENT TAPE, SR5-1 (for 525/60 system)
8-960-075-11 o ALIGNMENT TAPE, SR2-1 (for 525/60 system)
8-960-075-51 o ALIGNMENT TAPE, SR5-1P (for 625/50 system)
8-960-075-61 o ALIGNMENT TAPE, SR2-1P (for 625/50 system)

9-911-053-00 o THICKNESS GAUGE
9-919-573-01 o CLEANING LIQUID

J-6530-650-A o HEAD TIP PROTRUSION MEASUREMENT GAUGE
J-6190-800-A o TENSION REGULATOR SLANTNESS CHECK TOOL
A-8319-485-A o IC MEMORY CARD BOX, CDS-20 ASSEMBLY
1-772-003-11 o CARD (2MB), MEMORY
1-772-004-11 o CARD (4MB), MEMORY



DNW-75 (J, SY)
DNW-75P (SY) J, E
9-967-870-01

Sony Corporation
Broadcasting & Professional Systems Company

Printed in Japan
1999. 9 08
©1999